

Monitoring to Detect Groundwater Problems
Resulting from Enhanced Oil Recovery

Energy Resources Co., Inc.
Cambridge, MA

Prepared for

Municipal Environmental Research Lab.
Cincinnati, OH

Oct 81



BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

EPA-600/2-81-241
October 1981

P882-119074

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

**MONITORING TO DETECT
GROUNDWATER PROBLEMS RESULTING
FROM ENHANCED OIL RECOVERY**

by

**Ron Beck
Bernard Aboba
Douglas Miller
Ivor Kaklins
ERCO/Energy Resources Co. Inc.
Cambridge, Massachusetts 02138**

EPA Contract No. 68-03-2648

Project Officer

**John S. Farlow
Oil & Hazardous Materials Spills Branch
Municipal Environmental Research Laboratory—Cincinnati
Edison, New Jersey 08837**

**MUNICIPAL ENVIRONMENTAL RESEARCH LABORATORY
OFFICE OF RESEARCH AND DEVELOPMENT
U.S. ENVIRONMENTAL PROTECTION AGENCY
CINCINNATI, OHIO 45268**

BEGIN
LAST LINE
OF TEXT

3/8"

REPRODUCED BY
**NATIONAL TECHNICAL
INFORMATION SERVICE**
U.S. DEPARTMENT OF COMMERCE
SPRINGFIELD, VA. 22161

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

EPA Form 2350-4 (4-80)
(PREVIOUSLY CIN. EPA FORM 287)

U.S. GOVERNMENT PRINTING OFFICE: 1980-680-629

TYPING GUIDE SHEET

NOTICE

THIS DOCUMENT HAS BEEN REPRODUCED
FROM THE BEST COPY FURNISHED US BY
THE SPONSORING AGENCY. ALTHOUGH IT
IS RECOGNIZED THAT CERTAIN PORTIONS
ARE ILLEGIBLE, IT IS BEING RELEASED
IN THE INTEREST OF MAKING AVAILABLE
AS MUCH INFORMATION AS POSSIBLE.

TECHNICAL REPORT DATA (Please read Instructions on the reverse before completing)		
1. REPORT NO. EPA-600/2-81-241	2. ORD Report	3. RECIPIENT'S ACCESSION NO. PHE 11907 4
4. TITLE AND SUBTITLE Monitoring to Detect Groundwater Problems Resulting from Enhanced Oil Recovery	5. REPORT DATE October 1981	6. PERFORMING ORGANIZATION CODE
7. AUTHOR(S) Ron Beck, B. Aboba, D. Miller, and I. Kaklins	8. PERFORMING ORGANIZATION REPORT NO.	
9. PERFORMING ORGANIZATION NAME AND ADDRESS ERCO/Energy Resources Co., Inc. 185 Alewife Brook Parkway Cambridge, MA 02138	10. PROGRAM ELEMENT NO. INE 823	11. CONTRACT/GRANT NO. 68-03-2648
12. SPONSORING AGENCY NAME AND ADDRESS Municipal Environmental Research Laboratory - Cin., OH Office of Research and Development U.S. Environmental Protection Agency Cincinnati, OH 45268	13. TYPE OF REPORT AND PERIOD COVERED Final	14. SPONSORING AGENCY CODE EPA/600/14
15. SUPPLEMENTARY NOTES John S. Farlow, Project Officer (201-321-6631)		
16. ABSTRACT This report develops a four-stage monitoring program to detect groundwater contamination events that may potentially result from enhanced oil recovery (EOR) projects. The monitoring system design is based on a statistical analysis evolving from a series of equations that model subsurface transport of EOR spills. Results of the design include both spatial and frequency monitoring intervals that depend on properties of the local geology and dispersion characteristics of the potential contaminants. Sample results are provided for typical reservoir characteristics. Selection of measures to be sampled is based on a review of the identity of likely contaminants, on the available sample and analysis procedures, and on the cost and time constraints on analysis. Nonspecific indicator measures are identified that can be used to flag those intervals requiring more intensive and specific monitoring. The number of independent variables in the analysis dictate that EOR monitoring systems be designed on a site-specific basis. Sampling designs can be easily formulated to conform to the peculiarities of chosen EOR sites based on data already available from federal and state geological surveys and from oil company statistics.		
17. KEY WORDS AND DOCUMENT ANALYSIS		
a. DESCRIPTORS Monitors Groundwater Pollution Oil Recovery Environmental Engineering	b. IDENTIFIERS/OPEN ENDED TERMS Monitoring Strategy Groundwater Pollution Environmental Problems Enhanced Oil Recovery	c. COSATI Field/Group
18. DISTRIBUTION STATEMENT Release to Public	19. SECURITY CLASS (This Report) Unclassified	21. NO. OF PAGES 146
	20. SECURITY CLASS (This page) Unclassified	22. PRICE

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

DISCLAIMER

This report has been reviewed by the Municipal Environmental Research Laboratory, U.S. Environmental Protection Agency, and approved for publication. Approval does not signify that the contents necessarily reflect the views and policies of the U.S. Environmental Protection Agency, nor does mention of trade names or commercial products constitute endorsement or recommendation for use.

6 1/2"

9 1/8"

BEGIN
LAST LINE
OF TEXT

3 1/3"

11

PAGE NUMBER

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

EPA Form 2250-4 (4-80)

(PREVIOUSLY CEN. EPA FORM 227)

© U.S. GOVERNMENT PRINTING OFFICE: 1980-042-839

TYPING GUIDE SHEET

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

FOREWORD

The U.S. Environmental Protection Agency was created because of increasing public and government concern about the dangers of pollution to the health and welfare of the American people. Noxious air, foul water, and spoiled land are tragic testimonies to the deterioration of our natural environment. The complexity of that environment and the interplay of its components require a concentrated and integrated attack on the problem.

Research and development is that necessary first step in problem solution; it involves defining the problem, measuring its impact, and searching for solutions. The Municipal Environmental Research Laboratory develops new and improved technology and systems to prevent, treat, and manage wastewater and solid and hazardous waste pollutant discharges from municipal and community sources, to preserve and treat public drinking water supplies, and to minimize the adverse economic, social, health and aesthetic effects of pollution. This publication is one of the products of that research and provides a most vital communications link between the researcher and the user community.

This report develops a groundwater monitoring program for the early detection of any environmental problem that may result from enhanced oil and gas recovery operations. The program is readily adaptable for use at specific sites. The report will be of interest to all those interested in the potential environmental impacts that may be associated with tertiary oil and gas production. Further information may be obtained through the Oil and Hazardous Materials Spills Branch, Edison, New Jersey 08837.

Francis T. Mayo, Director
Municipal Environmental Research
Laboratory

BEGIN
LAST LINE
OF TEXT

3/8"

-iii-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD,
BEGIN
SECTIONS
HERE

ABSTRACT

This report develops a four-stage monitoring program to detect groundwater contamination events that may potentially result from enhanced oil recovery (EOR) projects. The monitoring system design is based on a statistical analysis evolving from a series of equations that model subsurface transport of EOR spills. Results of the design include both spatial and frequency monitoring intervals that depend on properties of the local geology and dispersion characteristics of the potential contaminants. Sample results are provided for typical reservoir characteristics.

Selection of measures to be sampled is based on a review of the identity of likely contaminants, on the available sample and analysis procedures, and on the cost and time constraints on analysis. Nonspecific indicator measures are identified that can be used to flag those intervals requiring more intensive and specific monitoring.

The number of independent variables in the analysis dictate that EOR monitoring systems be designed on a site-specific basis. Sampling designs can be easily formulated to conform to the peculiarities of chosen EOR sites based on data already available from federal and state geological surveys and from oil company statistics.

This report is submitted by Energy Resources Company Inc. in fulfillment of Subcontract No. N8520023SP with Rockwell International under Contract No. 68-03-2648 with the U.S. Environmental Protection Agency. Work began in September 1979 and was completed August 1980. The draft report was completed in November 1980. The Rockwell Project Officer was Walter Unterberg.

BEGIN
LAST LINE
OF TEXT

3/8"

iv

PAGE NUMBER

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

EPA Form 2350-4 (4-80)

(PREVIOUSLY CIN, EPA FORM 287)

U.S. GOVERNMENT PRINTING OFFICE: 1980-660-538

TYPING GUIDE SHEET

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD.
BEGIN
SECTIONS
HERE

CONTENTS

Foreword	iv
Abstract	vi
Figures	vii
Tables	viii
Abbreviations and Acronyms	ix
1. Introduction	1
The Need for Monitoring Programs	1
Background	2
Objectives of This Study	3
2. Overview of EOR Processes	5
Steam Injection	5
In Situ Combustion	8
Improved Waterflood	8
Micellar/Polymer Flooding	11
Alkaline Flooding	14
CO ₂ -Miscible Flooding	14
3. Groundwater Contamination Pathways.	17
4. A Simple Program to Monitor EOR Projects	21
Overview.	21
Conceptual Design of the Monitoring Program	21
Representative Monitoring Programs.	25
5. Identification of Chemicals Used in Enhanced Recovery Programs	31
Chemicals Used in EOR and Enhanced Gas Recovery Processes	31
Chemicals Covered Under Current Regulatory Structure	32
6. Groundwater Sampling and Analysis Procedures	49
Introduction.	49
Sampling Parameters	50
Applicability of the Techniques	56
7. Monitoring Program Design Considerations.	59
Design Issues	59
Benefits Measures	59
Development of Baseline Data.	60
Detection of Trends and Violation of Standards.	63
Identification of Previously Unrecognized Pollutants.	63
Detection of Chemical or Hydrocarbon Losses	64
Evaluation of the Effectiveness of Control Investments	65
Pollutant Indicators.	65

BEGIN
LAST LINE
OF TEXT

3/8"

v

PAGE NUMBER

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

8. Placement of Monitoring Stations and Frequency of Sampling	67
Introduction	67
Before Vs. After a Pollutant Event.	67
Design of a Pollution-Event Detection System.	68
Monitoring in Response to Pollutant Events.	77
9. Baseline Data on Groundwater Quality.	85
Introduction.	85
Selection of Counties	85
Display of Spatial Placement.	86
Selection of a Statistic.	86
Trend Analysis.	87
10. Recommendations	89
References	91

Apendices

A. World Oil's 1979-1980 Guide to Drilling, Workover and Completion Fluids	95
B. Development of Convection-Diffusion Model Equations	125
C. Development of Pollutant Event Monitoring Model Equations	129
D. USGS/NWDE Groundwater Monitoring Station Locations and Sampling Frequencies.	133

BEGIN
LAST LINE
OF TEXT

3/8"

-vi-

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

FIGURES

<u>Number</u>		<u>Page</u>
1	Steam-soak process	6
2	Steam-drive process.	7
3	Forward in situ-combustion process	9
4	Reverse in situ-combustion process	10
5	The micellar-polymer flooding process.	13
6	Major routes of groundwater contamination associated with enhanced recovery.	18
7	Monitoring Program: Water-Quality Degradation from EOR/EGR	23
8	EOR/EGR Environmental Monitoring Overview Matrix . . .	24
9	Concentration as a function of time for a sampling point 500 m downstream from a burst leak source. . . .	71
10	Volume of spill P (m^3)	73
11	Sampling frequency as a function of spill volume and dispersion rule	74
12	Progression of burst leak; dispersion rate = 5 times groundwater velocity	75
B-1	Location of Recommended Monitoring Stations for a Detection Monitoring System, Based on the Solution of an Equation for an Ellipse Showing Pollutant Trace at Concentration C_0 (Detection Limit) at Time t_0 (an Arbitrary Time After the Spill).	127
D-1	Area Map for Stephens County, Texas, Showing Loca- tions of USGS Groundwater Quality Monitoring Wells . .	134

BEGIN
LAST LINE
OF TEXT

3/8"

-vii-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

TABLES

<u>Number</u>		<u>Page</u>
1	Summary of Levels of Risk Anticipated from Various Activities Carried Out During Enhanced-Recovery Programs.	20
2	General Scheme for Monitoring of EOR Impacts on Groundwater	22
3	Monitoring Program for a Polymer Flood to be Conducted over a 20-year Period	26
4	Monitoring Program for a Steam Flood to be Conducted over a 20-year Period	28
5	Enhanced Oil Recovery: Chemicals Proposed for Use as Surfactants.	33
6	Enhanced Oil Recovery: Chemicals Proposed for Use as Cosurfactants.	34
7	Enhanced Oil Recovery: Hydrocarbons Used As a Fraction of Micellar Slug (or in Miscible-Displacement Processes)	35
8	Tertiary Oil Recovery: Chemicals Proposed for Use as Mobility Buffers	36
9	Tertiary Oil Recovery: Chemicals Proposed for Use as Bactericides and Biocides	37
10	Tertiary Oil Recovery: Chemicals Proposed for Use to Block Exchange Sites in the Formation (Preflushing)	37
11	Tertiary Oil Recovery: Chemicals Proposed as Electrolytes.	38
12	Tertiary Oil Recovery: Chemicals Proposed for Use to Increase Efficiency of Thermal Methods	38
13	EOR Chemical Producing Companies and Their Products - Summary for United States	39
14	Matrix of Monitoring Parameters	51
15	EOR/EGR Environmental Monitoring Costs and Benefits	61
16	Model Parameters.	70
17	Station Locations and Sampling Frequencies.	77
18	Pollutants and Classes of Transport Models.	79
19	Data Needs for Immiscible-Flow Model.	81
20	Data Needs for Miscible-Flow Model.	83
D-1	Summary of Existing Groundwater Data for Four Sample Counties.	133
D-2	Parameters Measured - 40 Stephens County Groundwater Monitoring Stations	135

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD,
BEGIN
SECTIONS
HERE

ABBREVIATIONS AND ACRONYMS

ACGIH	American Conference of Governmental Industrial Hygienists
API	American Petroleum Institute
ASTM	American Society for Testing and Materials
BOD	Biochemical Oxygen Demand
DOE	Department of Energy
EGR	Enhanced Gas Recovery
EOR	Enhanced Oil Recovery
EPA	Environmental Protection Agency
ERDA	Energy Research and Development Administration
EV	Environmental Office, Department of Energy
GC/FID	Gas Chromatograph with Flame Ionization Detector
GC/MS	Gas Chromatograph/Mass Spectroscope
ICAP	Inductively Coupled Argon Plasma Detector
IOCC	Interstate Oil Compact Commission
MBA	Methylene Blue Active Substances Test
MERL	Municipal Environmental Research Laboratory, EPA
NAS	National Academy of Science
NASQAN	National Stream Quality Accounting Network
NIH	National Institutes of Health
NWDE	National Water Data Exchange
NWQSS	National Water Quality Surveillance System
OSHA	Occupational Safety and Health Act
RCRA	Resource Conservation and Recovery Act
TOC	Total Organic Carbon
TDS	Total Dissolved Solids
TSCA	Toxic Substances Control Act
USGS	United States Geological Survey

BEGIN
LAST LINE
OF TEXT

3/8"

-ix-

PAGE NUMBER

BOTTOM
OF
IMAGE AREA;
CUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

SECTION 1

INTRODUCTION

THE NEED FOR MONITORING PROGRAMS¹

Various recent studies of the environmental aspects of enhanced oil recovery (Donaldson, 1978; United States Department of Energy, 1978; and Beck et al., 1980, for example) have identified contamination of freshwater in aquifers as a potential consequence of extensive enhanced oil recovery (EOR) activities. The DOE has ranked micellar polymer flooding as having the potential for significant environmental constraints (United States Department of Energy, Office of the Assistant Secretary for Environmental Protection, Safety and Emergency Preparedness, 1980). Many potential routes exist for groundwater pollution. No firm evidence is available that such pollution does or will occur, nor is there a complete understanding of the pollutant mechanism.

Relatively few data have been collected from the aquifers that may be contaminated from currently active enhanced recovery programs. Many of the enhanced recovery projects are experimental in nature, and all available resources were devoted to assembly of engineering performance data. Many of the early EOR projects took place in sparsely populated areas where no convenient water wells useful for the sampling of aquifer quality existed. Uncertainties as to whether groundwater contamination does in fact take place will persist until adequate data sets become available for study, or until a major pollutant event occurs that is readily detected by the public. For assembled data to be useful for pollutant detection and analysis, data must be collected consistently and according to statistically valid sampling procedures.

The various organizations responsible for environmental data collection (oilfield operators, U.S. EPA, USGS, U.S. DOE, state resource agencies and local resource agencies) have different monitoring objectives. Thus, each group's

¹For meaning of abbreviations and acronyms in this and subsequent sections, refer to listing on p. ix.

BEGIN
LAST LINE
OF TEXT

3/8"

-1-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

monitoring program design will be different although some elements will be in common.

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

A monitoring system is needed for use by research and policy groups such as the U.S. EPA, U.S. DOE and API. They will require nationwide data sets that can be used to detect long-term trends, to identify regional problems, and to determine how much attention should be paid to potential hazards to groundwaters from EOR activities. Any analysis that is to be applied to large data sets will require consistent data. If each station selects an entirely new set of variables to sample, intervals of sampling, and sampling procedures, then the statistical problems involved with using the entire national data set will be large.

The lack of sets of data collected over a long period of time to serve as a baseline is probably the most significant constraint as regards groundwater sampling, since chemicals can be expected to move only a few feet per year in most subsurface environments.

Additionally, the groundwater problem is so broad in scope that a generalized sampling plan at an affordable level of effort will be unlikely to yield useful results.

With these problems and provisos in mind, there is needed a set of procedures that will accomplish routine monitoring in an efficient fashion.

BACKGROUND

Information is available from various environmental monitoring programs developed over the last 15 years. For example, the USGS has developed the NASQAN water-quality monitoring network and the EPA has developed the NWQSS network. The USGS has maintained a computer file of groundwater quality data for over more than 10 years.¹ The states of California, Texas, Kansas, Oklahoma, and Illinois (among others) maintain records of oilfield connate waters, brines,

¹Contact the USGS National Water Data Exchange, Reston, Virginia, for further information.

²All unpublished data available from the state agencies (California Division of Oil and Gas, California Department of Water Resources, Texas Railroad Commission, Kansas, Oklahoma, and Illinois Geological Surveys) and some data available on tape from the U.S. DOE, Bartlesville Energy Research Center.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

and adjoining aquifers.² EPA is developing monitoring programs regarding Underground Injection Control regulations.

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

Each of these existing monitoring or data repository systems is an important element in the design of a monitoring program for enhanced recovery operations. In addition, hierarchical chemical analysis schemes have been developed to deal with the requirements of RCRA, the Safe Drinking Water Act, and TSCA. Finally, the EPA Las Vegas Laboratory has developed a series of comprehensive documents regarding monitoring to detect groundwater pollution from oil-shale projects (Todd et al., 1976; Slawson, 1979; Slawson and McMillian, 1979; Pimental et al., 1979).

The statistical and sampling theory bases for developing groundwater monitoring program all exist for other applications. Modeling work includes Bender et al. (1977), Gray and Pinder (1976), Peaceman (1977), and Aris (1978). A variety of monitoring program designs for other applications were developed by Gunnerson (1966), Matalas (1967), Lettenmaier (1975), Montgomery (1974), and Beck and Pierrehumbert (1976).

OBJECTIVES OF THIS STUDY

This study aims at meeting the data needs for the identification of the nature and extent of groundwater contamination due to enhanced oil recovery activities.

The primary objective of this study is to design an efficient EOR project groundwater monitoring program and to develop the necessary procedures to accomplish this. This study is to provide the groundwork for development of standard principles to be used in monitoring EOR projects.

Monitoring guidelines are to be developed through analysis of: (a) review of chemical use data and of toxicity and carcinogenicity studies that establish the pollutants of concern, (b) statistical analysis of patterns of variability to establish suitable sampling frequency and sample well spacing and patterns, and (c) review of analytical protocols available that will yield valid results.

BEGIN
LAST LINE
OF TEXT

3/8"

-3-

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

SECTION 2

OVERVIEW OF EOR PROCESSES

After World War II, as a result of the increasing demand for crude oil, attention was given to improved management of the known oil in place, as well as to an expansion in exploration. Scientists and engineers had recognized that simple techniques of improved oil recovery were potentially useful and realized that new methods could play a very important role in adding to oil reserves and reservoir productivity (American Petroleum Institute, 1961). Since the end of the war various new fluid-injection methods have been researched that provide the potential to recover large volumes of oil left in reservoirs after conventional recovery. Little effort, however, has been applied to identification of environmental problems.

9-1/8"

STEAM INJECTION

Documented cases of steam injection were reported in the 1920's and 1930's, and apparently the technique had been discovered long before that. In at least one case -- in the tight sands of the Bradford, Pennsylvania, field -- the steam or hot water injection was initiated to improve injectivity of the water rather than to increase production (American Petroleum Institute, 1961). In other situations the steam had been intended for paraffin removal from the well bore. Steam injection did not significantly progress until the 1960's, when the Shell Oil Company succeeded with a cyclic steam soak in California (American Petroleum Institute, 1961). Since then, steam flooding has been applied successfully to heavy oils in a variety of California fields (Figures 1 and 2). At the present time, steam soak is a technically proven and economically acceptable enhanced-recovery process, and in some cases steam flooding looks promising. Large-scale expansion of steam soak in California is currently being held up by air-pollution concerns. Various options are under consideration, including use of scrubbers, low-NO_x burners, fluidized-bed coal generators and solar generated steam. Possible revision of air-pollution regulations would simplify the problem.

BEGIN
LAST LINE
OF TEXT

There has been little concern about environmental protection until the present. Conflicts with air regulations have

3-8"

-5-

Preceding page blank


BOTTOM OF
IMAGE AREA.
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE


CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

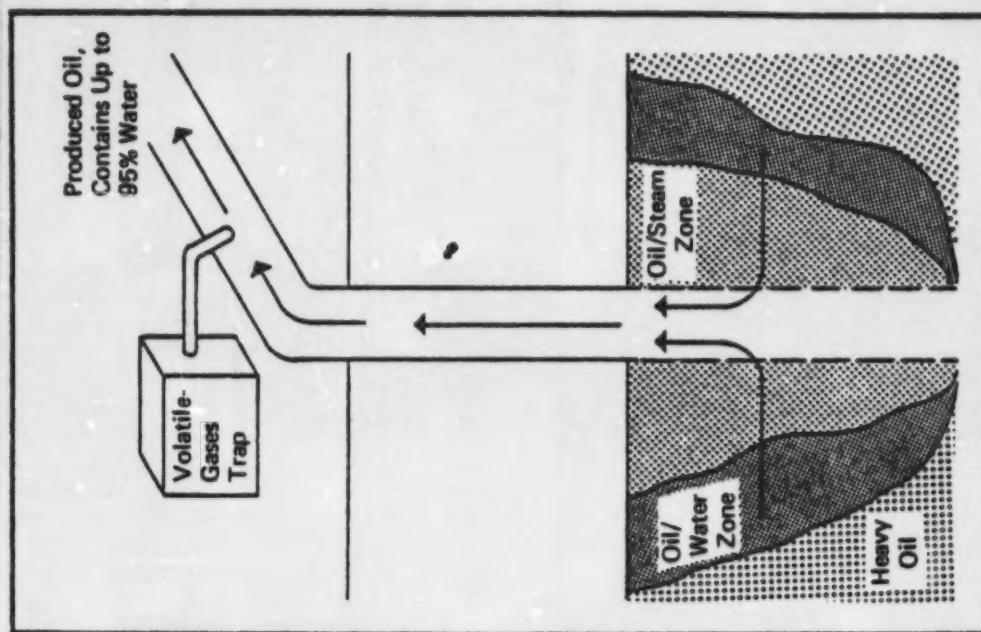

II. PRODUCTION PHASE

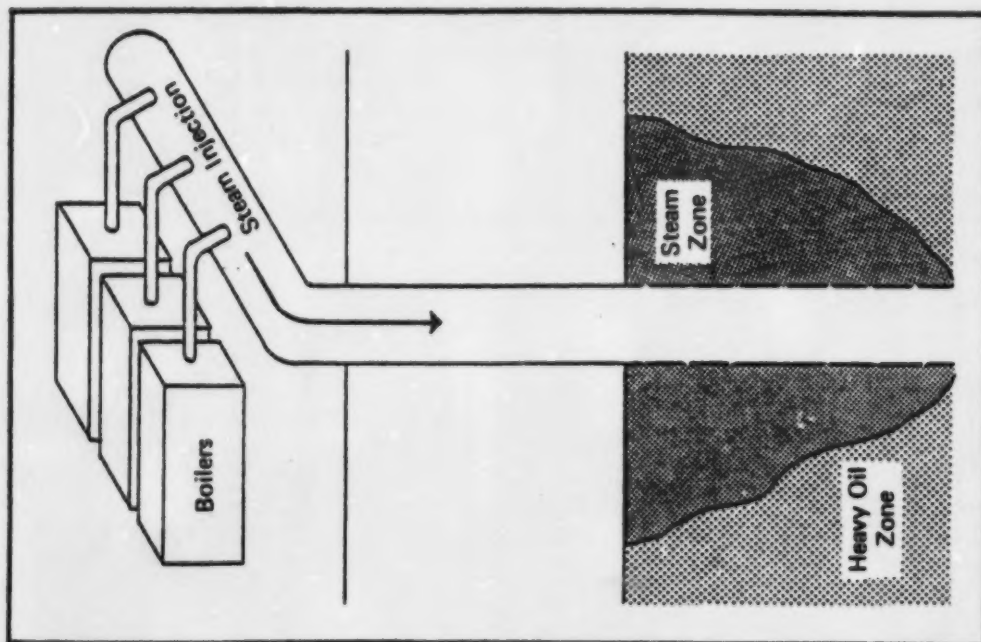

I. INJECTION PHASE

Figure 1. Steam-soak process.

BEGIN
LAST LINE
OF TEXT

3/8"

6

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

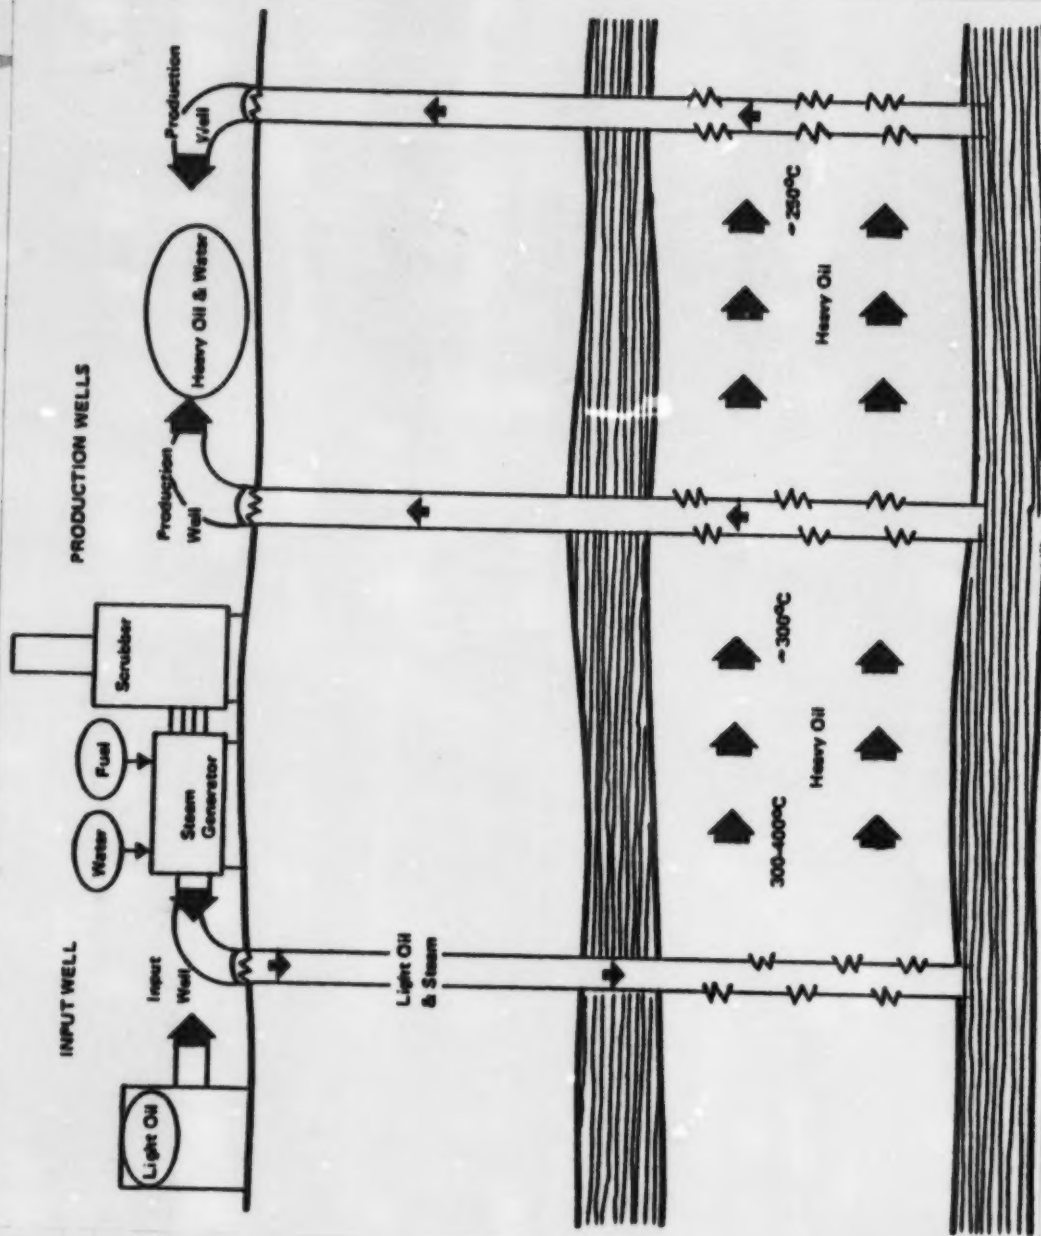


Figure 2. Steam-drive process.

BEGIN
LAST LINE
OF TEXT

3/8"

-7-

EPA Form 2350-4 (4-80)

(PREVIOUSLY CEN. EPA FORM 231)

U.S. GOVERNMENT PRINTING OFFICE: 1980-480-408

TYPING GUIDE SHEET

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

led to air sampling, stack sampling, air-dispersion modeling, and developmental scrubber engineering. Re-use of produced water for steam injection is also under study.

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

IN SITU COMBUSTION

Air and water injection were common in the earlier part of the 1900's. The purpose of air injection at that time was to "push" the oil toward the producing well. Yet the O₂ content of the resulting air samples indicated that subterranean combustion had been at least partially responsible for the "air-injection" that increased production.

In situ combustion was probably unknowingly conducted in the early 1900's before it was recognized as such. Some of the earliest work in in situ-combustion EOR occurred in Russia in 1935, in shallow, high-permeability, high-porosity sands. The oil-laden sand was ignited by glowing charcoal (American Petroleum Institute, 1961). This work was performed in a pressure-depleted reservoir with 36 API gravity crude. The recovery was small, but significant. The most significant present work in the United States is in California, by Getty and Citgo (Beck et al., 1980). Figures 3 and 4 depict the process. Environmental studies have not been performed.

IMPROVED WATERFLOOD¹

Simple waterflooding had its beginning over a century ago, in the Bradford field of western Pennsylvania, when an insufficient packer² allowed leakage of shallow groundwater into a well's oil column. While the production of the immediate well was curtailed, there was a marked increase in oil production at the surrounding wells.

Early operators built on this experience and developed "circle floods" whereby they would waterflood their field incrementally by turning central producing wells into water injectors and, as oil production continued, they would, in an expanding circle, convert the closest watered-out producers to water injectors.

For many years waterflooding was practiced illegally in Pennsylvania; not until 1921 was the practice legalized there. Other early waterflooding projects took place at

¹Summarized from Schumacher, 1978.

²Packer - the outer supporting structure of a well.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD.
BEGIN
SECTIONS
HERE

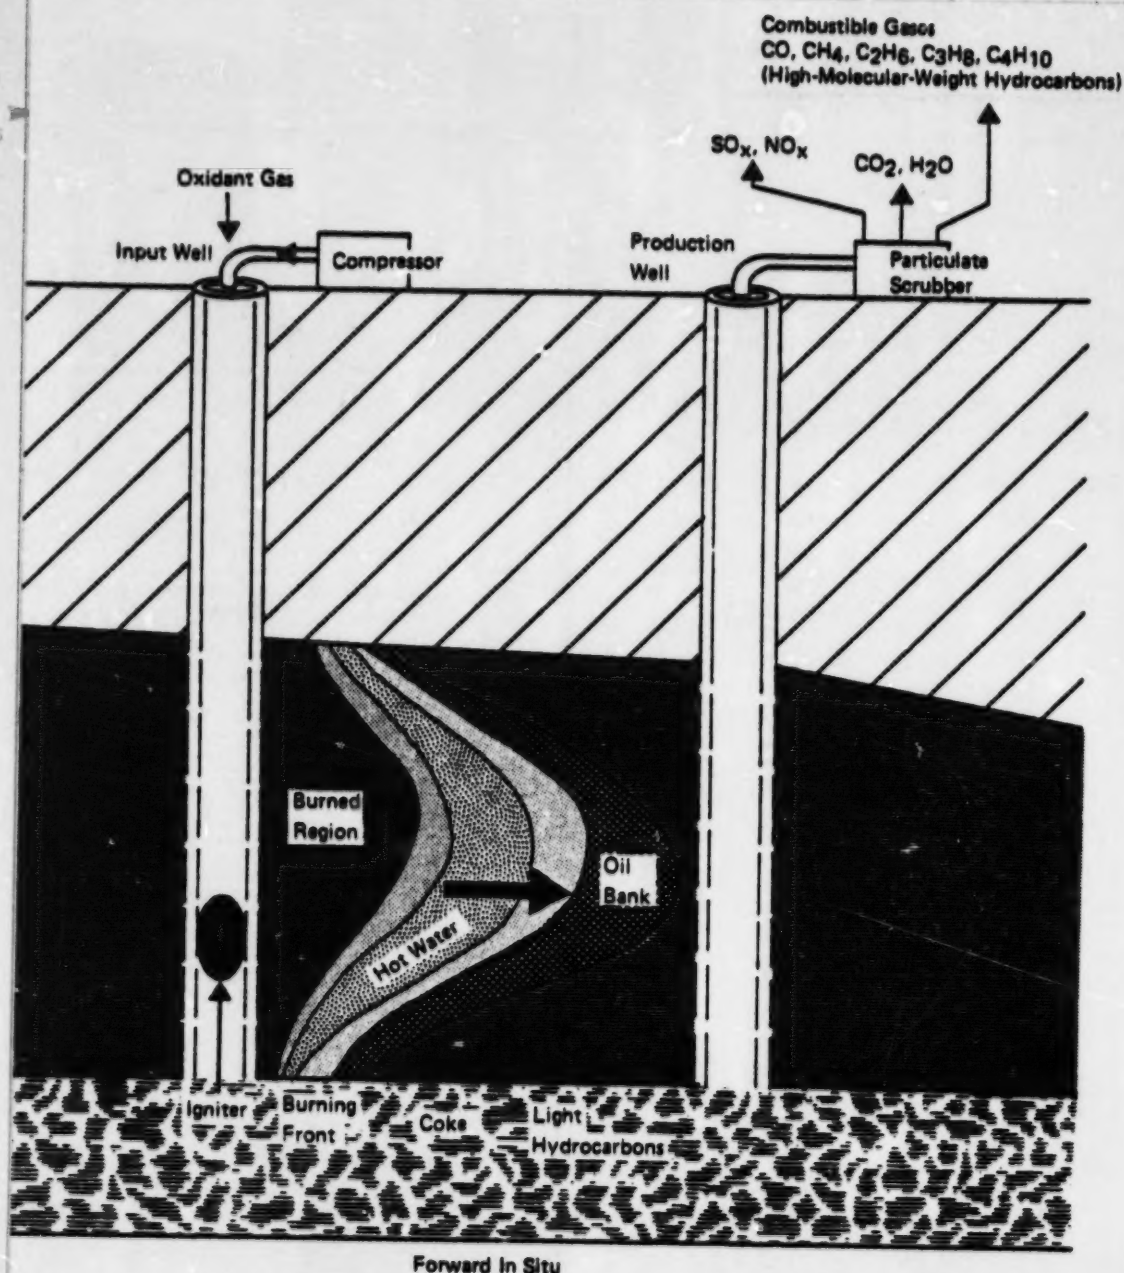


Figure 3. Forward in situ-combustion process.

BEGIN
LAST LINE
OF TEXT


BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

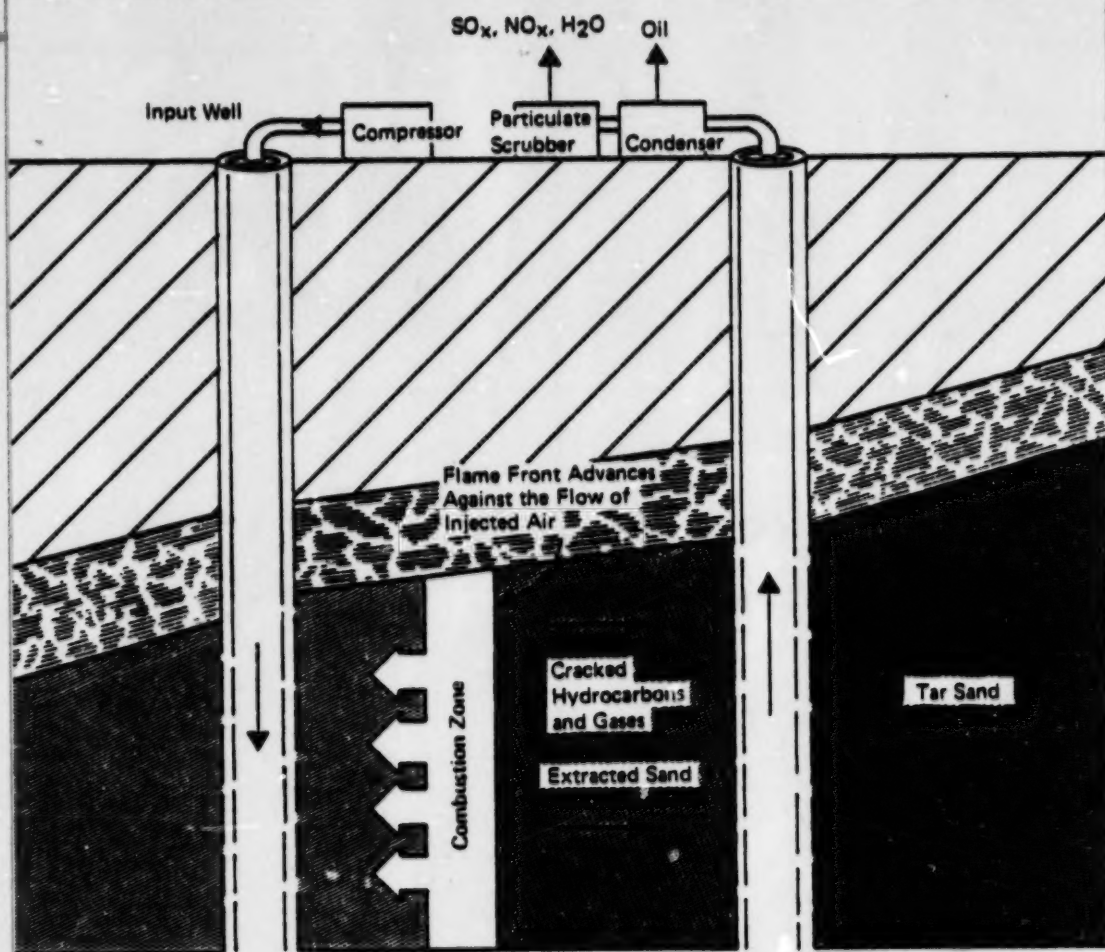

Reverse In Situ

Figure 4. Reverse in situ-combustion process.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

California's Kern River field and in Ontario (Interstate Oil Compact Commission, 1974), but many believed the water would contaminate or dilute the oil. Legislative constraints diminished in the 1940's, however, and the practice spread to fields across the country.

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

Improved waterfloods or polymer-augmented waterfloods were developed in order to increase recovery efficiency of the flood. The improvement in oil-displacement efficiency over and above straight waterflooding is minimal, but the polymer thickens the injected water and greatly improves the sweep conformance,³ causing the waterflood to affect a larger fluid mobilities, and particularly to the fluid mobility ratio of oil to water on injection and production in flood patterns. The results suggested increasing waterflood's sweep efficiencies by increasing the viscosity of the injected water (Chang, 1978). Then in 1964 water-soluble polymers were suggested as the preinjection thickening to reduce water mobility. Numerous laboratory and field studies have been done since that time to further refine the process. Improved waterfloods were field-tested in the 1960's.

The injected chemicals are of potential environmental concern. Historical data on polymers used in this process exist from their use as flocculating agents in water-treatment processes. Flocculating agents have been screened for health hazards on a regular basis by the chemical manufacturers that supply them; there is no formal EPA review process, however, nor have any detailed EPA studies been performed to evaluate use of flocculants.

MICELLAR/POLYMER FLOODING⁴

Micellar/polymer flooding involves the use of a surfactant/water injection followed by polymer/water injection.

³In summary, sweep conformance means flooding the entire volume of the oil-bearing zone. See petroleum engineering texts, for example, the Society of Petroleum Engineers monograph series, for a detailed explanation of this.

⁴Gogarty (1975) reviews the development of surfactant or micellar/polymer flooding in his paper on the "Status of Surfactant or Micellar Methods."

⁵Sweep Efficiency is the percentage of recoverable oil that is produced at time of water breakthrough in the production well.

BEGIN
LAST LINE
OF TEXT

3/8"

-11-

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

These "slugs" of fluid act to improve the displacement efficiency and sweep efficiency over a conventional waterflood. Polymer injection adds conformity to and enhances sweep efficiency⁵ of the surfactant slug, which acts to minimize fluid-oil interfacial tension⁶ (see Figure 5). Surfactant flooding was initiated in the late 1920's and the 1930's, using polycyclic sulfonic substances and wood sulfite liquor. As the technique progressed, a variety of chemical substances were considered for use as long as they achieved the desired results of reduced interfacial tension between oil and flooding fluid and prevention of excessive adsorption of the surfactants in the reservoir. A range of surfactant-solvent compounds are still used in micellar/polymer flooding today, and as a result it is difficult to analyze the pollution effects from the surfactant slug.

Additional laboratory studies and refinement of the chemical-flooding theories gave rise to the so-called low-tension flooding process, whereby large volume (30 percent of the pore volume), low-surfactant-concentration (<2 percent) floods are used. In 1959 and 1961 this process was further refined by patents teaching injection of surfactant in low-viscosity hydrocarbon solvent (Holm and Bernard) and other hydrocarbon solutions for specific reservoir conditions. The processes using petroleum-based sulfonate slugs became known as soluble-oil flooding processes.

Microemulsions⁷ for use in oil recovery were first patented as part of a well-stimulation process to remove obstructing waxy solids. Twenty years later, what would become the well-known "Maraflood" enhanced-recovery process, licensed by Marathon Oil Company, was introduced by Gogarty and Olsen. This process differed from the low-tension floods because a small fraction of the pore volume and a relatively high surfactant concentration (>5 percent) were used.

Several types of surfactant flooding have been developed, but generally they are of two types. In the first, large volumes (15 to 60+ percent pore volume) and low concentrations of surfactant dissolved in oil or water are injected. The second type involves a relatively small volume (3 to 20 percent pore volume) of highly concentrated surfactant.

⁶Interfacial tension is an instability between two liquids along their interface caused by dissimilarities in molecular compositions.

⁷Microemulsions: surfactant-stabilized dispersion of water and hydrocarbons. The aggregates of surfactants and hydrocarbons (micelles) are in the general size range of 10^{-6} to 10^{-4} mm.

BEGIN
LAST LINE
OF TEXT

3/8"

-12-

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

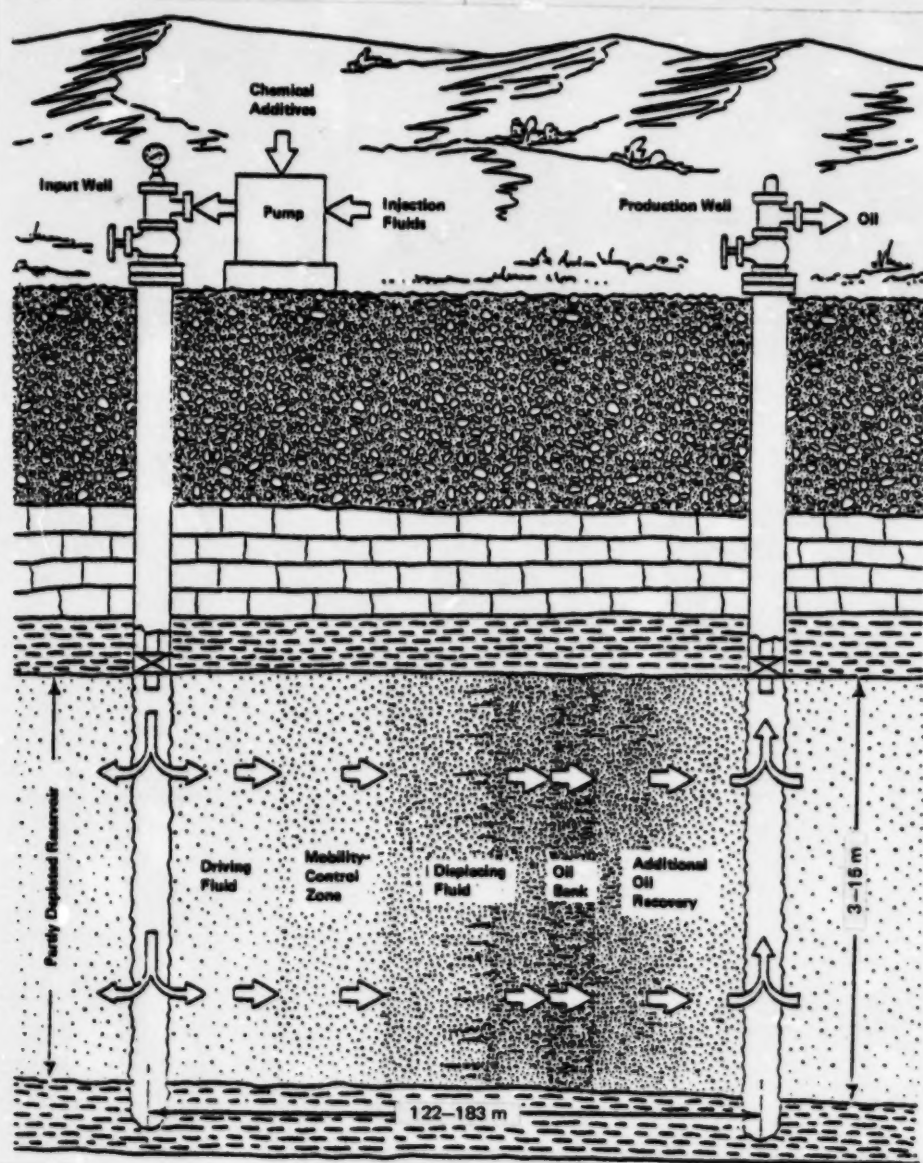


Figure 5. The micellar-polymer flooding process (ERDA, 1975).

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

The slug that is used in micellar/polymer floodings can have a variety of components that make assessment of its environmental hazards difficult at best. Often the exact composition of additives used is not known, since crude extracts of a roughly determined nature may be added. The basic composition of a micellar slug is hydrocarbon, surfactant, and/or water, and often added to these are a cosurfactant (usually alcohol) and electrolytes (inorganic salts).

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

ALKALINE FLOODING

The history of alkaline flooding is most likely directly aligned with that of waterflooding. After waterflooding was recognized as an effective recovery mechanism, the addition of various alkaline chemicals was considered as an option for recovery of further fractions of the remaining oil in suitable reservoirs. The alkaline chemicals, such as sodium hydroxide and potassium hydrate, were added to the drive water to enhance recovery by improving formation wettability and oil emulsification and by reducing interfacial tension (U.S. Department of Energy, 1978).

Regarding environmental protection, the only relevant work has been a recent environmental assessment (O'Banion, 1978b).

CO₂-MISCIBLE FLOODING

Out of the search for the development of more efficient recovery technologies, the concept of miscible-fluid flooding developed, and many petroleum scientists were intrigued by the idea of miscible-fluid displacement (Interstate Oil Compact Commission, 1974). Although the concept of miscible-fluid displacement was proposed in 1972, the idea was not tested in field applications until the late 1950's (Schumacher, 1978).

The use of CO₂ as a miscible-flooding agent evolved because it was known to be one of the few low-cost fluids that could be miscible with both oil and water if the right physical conditions were maintained (Schumacher, 1978). A carbonated waterflood using this concept was initiated in the Bartlesville sand formation, Oklahoma, in 1961. From 8 to 10 pounds of CO₂ were added to each barrel of injected water. However, this application had very disappointing recovery effects, apparently due to formation fractures and peripheral stratifications that diverted the mainstream of the fluid (Interstate Oil Compact Commission, 1974). Though laboratory

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

tests showed the CO₂ process to be promising and very efficient, in field applications the miscible slug of solvent apparently becomes enriched with oil as it passes through the reservoir, and loses a large part of its scavenging ability (Interstate Oil Compact Commission, 1974).

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

6-1/2"

9-1/8"

BEGIN
LAST LINE
OF TEXT

3/8"

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

-15-

EPA Form 2350-4 (4-80)

(PREVIOUSLY CEN EPA FORM 387)

U.S. GOVERNMENT PRINTING OFFICE: 1980-860-039

TYPING GUIDE SHEET

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

SECTION 3

GROUNDWATER CONTAMINATION PATHWAYS

Enhanced recovery can result in contamination of aquifers by a variety of pathways that fall into three general categories: 1) downward leaching from surface disposal, 2) communication to aquifers via improperly sealed or cased wells, and 3) communication to aquifers through fractures or cracks in previously impermeable formations. Such fractures may be opened up by changed reservoir pressures accompanying enhanced oil-recovery techniques and subsequent reinjection or by gas fracturing. Figure 6 depicts the major routes of contamination.

Evaluation of existing information can provide only tentative conclusions regarding groundwater degradation. Significant risks to groundwater quality are apparent. Some of the chemicals employed in enhanced recovery may be toxic or carcinogenic. Little is known about the degradation products of these chemicals, which may be more or less toxic than the parent chemicals. Brines, which are produced in a ratio with oil as high as 20:1 in current enhanced-recovery operations, have the potential to contaminate freshwater aquifers by reinjection or disposal. Brines also contain heavy metals that may migrate from the disposal site. Some of the pathways depicted in Figure 6 are known to exist as a result of pollutant events that have already occurred. Others only represent possible pathways. The volumes and concentrations of chemicals used are significant enough to warrant further investigation of the toxicities of the chemicals and of the pollutant pathways.

All enhanced-recovery technologies involve potential groundwater concerns. Those technologies that require injection of chemicals into the reservoir or fracturing of formations hold the most potential for contamination. In situ combustion is also of particular concern, because of the range of chemicals that are formed during the subsurface combustion process. Table 1 summarizes the types of pollutant problems that may occur.

In addition to the generic concerns, there are various environmental/institutional situations that may enhance pollutant risks. These must be looked at in a site-specific

BEGIN
LAST LINE
OF TEXT

3/8"

-17-

Preceding page blank

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

ENHANCED-RECOVERY GENERALIZED PROCESS STEPS

1. Injection
2. Recovery mechanism
3. Oil production,
Separation of
water phase
4. Injection of water
in reservoir to
minimize
subsidence
5. Re-injection

GENERALIZED ROUTES OF GROUNDWATER CONTAMINATION

- A. Water effluent from generators,
subsequent reinjection or leaching
- B. Solid wastes from generator,
subsequent leachate
- C. Well casing or geologically allowed leaks
- D. Escape through gas cap
- E. Leak to surface via old well
- F. Disposal of water phase
- G. Water use
- H. Unknown degree of containment of the
injected fluid within receiving formation

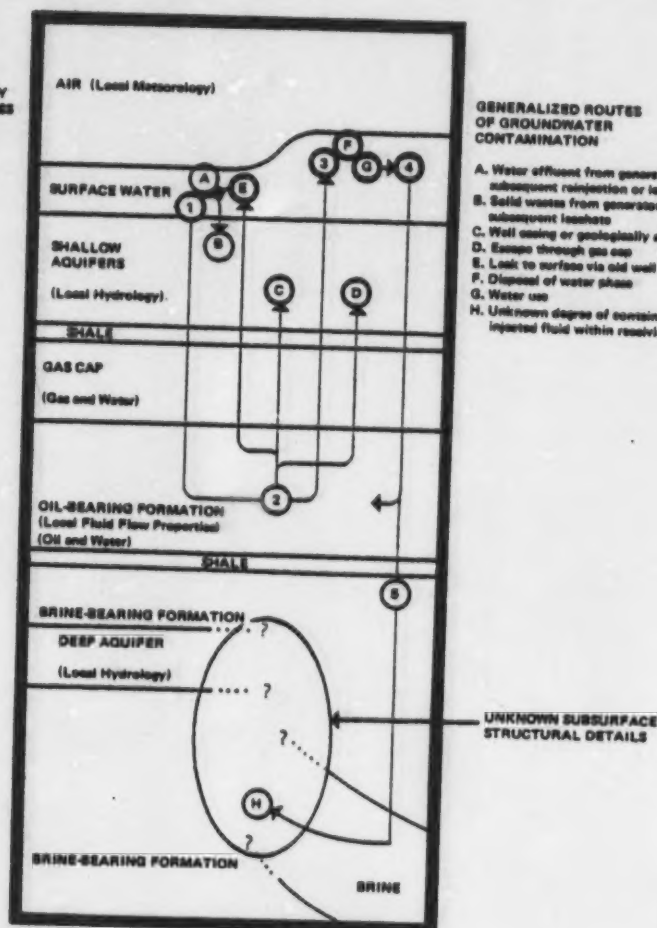


Figure 6. Major routes of groundwater contamination associated with enhanced recovery.

BEGIN
LAST LINE
OF TEXT

3/8"

-18-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

or a technologywide assessment, and should be considered in terms of their probability of occurrence. Insufficient information is available to make reliable determinations of such probabilities at this time. The types of situations of concern include:

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

1. EOR programs taking place in old fields in which unmapped abandoned wells exist. These old wells are in some cases imperfectly sealed and may lead to communication with freshwater aquifers.
2. EOR programs making use of old fields in which old wells are not all reworked or recapped. Cracks in cement or casings, as a result of corrosion, age, or both, may allow communication with freshwater aquifers. Proposed underground injection regulations would require reworking of all wells within .4 km of all EOR activities.
3. Freshwater aquifers located just above or below the producing formation. This would greatly increase the opportunity for contamination over the more common situation, in which aquifers are far removed from producing layers.
4. EOR programs taking place in areas that have undergone significant subsidence. In such areas the subsidence events may have resulted in fracturing or other structural alterations allowing transport of pollutants.
5. High seismic activity in the region of the project. The producing reservoir will become a repository for brines containing a variety of injected chemicals. These hazardous wastes may escape the oil formation following seismic events.
6. Freshwater aquifers located below disposal ponds for drilling muds and hydraulic fracturing fluids. In these situations, leachate contamination may occur.

BEGIN
LAST LINE
OF TEXT

3/8"

-19-

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

TABLE 1. SUMMARY OF LEVELS OF RISK ANTICIPATED FROM VARIOUS ACTIVITIES CARRIED OUT DURING ENHANCED-RECOVERY PROGRAMS. THESE ARE ERCO ESTIMATES BASED UPON AVAILABLE EVIDENCE.

		Activities Causing Groundwater Contamination				
		Injection of Chemicals	In Situ Formation of Pollutants	Cause Subsurface Structural Changes (new pollutant routes)	Disposal of Solid Wastes with Hazardous Leachate	Summary of Potential for Groundwater Problems
Enhanced Recovery Processes	Steam	-	+	-	+	Low
	In Situ Combustion	-	*	-	-	Medium
	Polymer	*	-	+	-	High
	Polymer/Micellar	*	-	+	-	High
	Alkaline	*	*	+	-	High
	CO ₂	+	-	+	-	Low
	Hydraulic Fracturing	+	-	++	+	Medium
	Explosive Fracturing	-	-	++	-	Medium
	Directional Drilling	-	-	-	-	Low

LEGEND:

-Negligible Risk

+Potential for Occasional Pollutant Events

*Significant Potential for Regular Occurrence of Pollutant Events If No Measures Are Taken

BEGIN
LAST LINE
OF TEXT

3/8"

-20-

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

SECTION 4

A SIMPLE PROGRAM TO MONITOR EOR PROJECTS

This chapter presents a simple monitoring scheme that can be implemented as part of an enhanced oil-recovery project. The purpose of such a so-called detection monitoring program will be to check for indications that groundwater degradation may be occurring as a result of the EOR project. A more sophisticated monitoring procedure may be appropriate in cases where the project is very large or where the regional geology has been identified as making the project particularly susceptible to pollutant events. In such situations, the procedures discussed in Sections 5 through 8 will be pertinent.

OVERVIEW

9-1/8"

Particular monitoring activities and intensities of sampling will be associated with different EOR technologies and with each stage of an EOR project. Table 2 depicts a general scheme for monitoring. The scheme involves assembly of background and baseline information during the early stages of a project, with routine monitoring during the course of the project and, in some cases, follow-up monitoring for 5 years after the project is completed. For relatively low-risk technologies such as thermal-oil recovery, less monitoring is required.

CONCEPTUAL DESIGN OF THE MONITORING PROGRAM

Figures 7 and 8 summarize the overall concept of EOR/EGR (Enhanced Gas Recovery) monitoring. Figure 7 gives a step-by-step outline of the tasks to be carried out in an environmental-monitoring program. The approach is a hierarchical one, in which the simplest, broadest monitoring activities are first performed and then only those analytical tests relevant to specific environmental problems are incorporated in the detailed and comprehensive phases of a monitoring program. Figure 8 characterizes each of four hierarchical stages in a monitoring program.

BEGIN
LAST LINE
OF TEXT

3/8"

-21-

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

TABLE 2. GENERAL SCHEME FOR MONITORING OF EOR IMPACTS ON GROUNDWATER.

Stage of Project Type of Project	Conception	Field Management (Rework or seal old wells, drill new wells)	Preflush	Injection of Chemical Slugs	Production by Water or Steam Injection	Post Production
Steam Soak, Steam Drive	Assemble Baseline Data Formulate Pollution-Response Plan	Prepare a Map of All Old Wells Monitor Reworking Activities	N.A.*	N.A.	Perform Diagnostic Monitoring Only If Unusual Reservoir Conditions Are Noted	None Required
In Situ Combustion			N.A.	N.A.		
Steam Drive with Additives			N.A.	Monitor for Presence of Chemicals in Produced Oil & Water		
CO ₂ Other Miscible Gas					Conduct Routine Monitoring of Nearby Groundwater	Conduct Routine Monitoring of Nearby Groundwaters
Advanced Waterflood, Polymer Flood			Carry Out Tracer Studies	Carry Out Tracer Studies		
Alkaline Flood Micellar/Polymer Flood						

*N.A. = Not Applicable.

BEGIN
LAST LINE
OF TEXT

3/8"

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

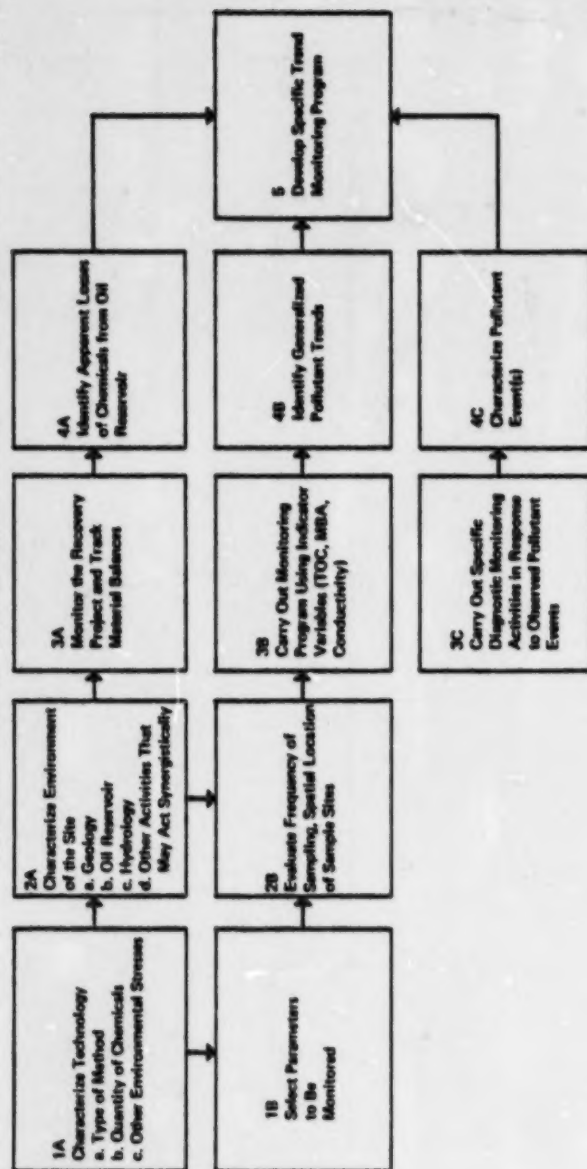


Figure 7. Monitoring Program: Water-Quality Degradation from EOR/EGR.

BEGIN
LAST LINE
OF TEXT

3/8"

-23-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

STAGES OF MONITORING			
Parameters to be Measured	I DEVELOP BASELINE	II MONITOR TRENDS	III SPECIFICALLY EVALUATE FLAGGED PROBLEMS
	Indicators	Indicators	Specify Chemicals
	Purpose of Monitoring	Determine Existing Conditions	Identify Problem Contaminants, Identify Violations of Standards
	General Strategy	a. Measure Baseline Levels b. Identify Spatial and Temporal Patterns	a. Perform Specific Tests to Determine Contaminants That Have Caused Trends b. Determine if Criteria Have Been Violated c. Determine Spatial Extent of Contamination
Major Dimension(s) of Analysis	Spatial and Temporal	Temporal for Representative Sites	Temporal for Specific Problem Zones
			IV ASSESS EFFECTIVENESS OF CONTROLS
			Specify Chemicals
			Compare Levels with Regulatory Criteria; Check for Reduction in Levels to Below Criteria Values
			a. Evaluate Contaminant Trends in Response to Controls

Figure 8. EOR/EGR Environmental Monitoring Overview Matrix. This display summarizes the major characteristics of the four types of monitoring needed to evaluate environmental quality.

BEGIN
LAST LINE
OF TEXT

3/8"

-24-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

REPRESENTATIVE MONITORING PROGRAMS

To show how the general scheme in Table 2 should be applied to a particular project, two typical monitoring programs are outlined, for a polymer flood in Table 3, and for a steam flood in Table 4. Each element of the monitoring program for the polymer-flood example is described below.

Design of Project

During the initial design stages of a polymer-flood project, available data on local groundwaters are collected. At a minimum, a cross-sectional mapping of the location of all freshwater aquifers in relationship to the producing formation is prepared. In particular, aquifers that are traversed by injection, production, or abandoned wells are noted. Additionally, all available monitoring data on the quality of these local aquifers are assembled. Geostatistical procedures such as "kriging" are employed to develop averages weighted by the spatial distribution of the sample points.

Reworking of Oilfield Wells

During the preparation stage of the polymer flood, a map is drawn that locates all the wells that penetrate the formation to be flooded. All wells are keyed by age, and all plugged and otherwise abandoned wells are noted. During the drilling of new EOR wells and reworking of old wells for use during the project, well-log data and well pressures are monitored to detect any communication of fluids with freshwater aquifers that are traversed. This monitoring procedure is a standard part of oilfield operations.

Preflush

During the preflush stage of the polymer flood, the initial pressurization of the reservoir takes place (even though sometimes the field has been subjected to secondary waterflooding for several years prior to the polymer project). A tracer is injected during the preflush to track the movement of the injected fluids under the new pressure conditions. The tracer is tracked in existing oil wells and also in water wells penetrating adjacent aquifers, to verify that no communication is occurring with freshwater bodies. Samples of the preflush fluids are drawn to determine their chemistry, in case any pollutant event (such as leakage via a sealed well) should occur.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TAILPS
AND ILLU-
STRATIONS

-25-

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

TABLE 3. MONITORING PROGRAM FOR A POLYMER FLOOD TO BE CONDUCTED OVER A 20-YEAR PERIOD

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

Stage of Project	Monitoring Events
Design of Project	1. Identify all freshwater aquifers. 2. Collect monitoring data on aquifer water quality; utilize "kriging"^a statistics to develop average values. Look for seasonal trends.
Rework Oilfield Wells	1. Develop maps of all old and all sealed wells, and inventory the condition of all old wells. 2. Monitor reworking procedure to detect any communication with aquifers.
Preflush	1. Conduct tracer studies to determine dynamics of injected fluids. 2. Monitor quality of preflush fluids.
Injection of Chemical Slugs	1. Conduct tracer studies to determine dynamics of chemical slug. 2. Inventory known degradation tendencies, toxicity, carcinogenicity of chemicals used; identify persistent potentially harmful components.
Production	Monitor for unusual levels of indicators (Total Organic Carbon, Methylene Blue, Active Substances, Conductivity, Reservoir/Welltest Pressure, Resistivity and the Geophysical Logs) on a weekly to monthly basis, depending on the proximity

^aSee Section 8, "Selection of a Statistic" for definition of "Kriging."

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

TABLE 3 (cont.)

Stage of Project	Monitoring Events
	of the aquifer to the producing zone. Sampling sites to be spaced at not more than 4 times well spacing if possible.
Post-production	1. Monitor for unusual levels of indicators on a yearly basis. 2. Monitor pressure for a statistically selected sample of oil wells.

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

8-1/2"

9-1/8"

BEGIN
LAST LINE
OF TEXT

3/8"

-27-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

TABLE 4. MONITORING PROGRAM FOR A STEAM FLOOD TO BE CONDUCTED OVER A 20-YEAR PERIOD

Stage of Project	Monitoring Events
Design of Project	1. Identify all freshwater aquifers 2. Collect monitoring data on aquifer water quality; utilize "kriging" statistics to develop average values. Look for seasonal trends.
Rework Oilfield Wells	1. Develop maps of all old and all sealed wells, and inventory the condition of all old wells. 2. Monitor reworking procedure to detect any communication with aquifers.
Steam-soak Selected Wells	Monitor produced oil and water phases to detect heat-induced synthesis of hazardous organics.
Fieldwide Steam Soak	Monitor produced oil and water phases to detect heat-induced synthesis of hazardous organics.
Post-production	None

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

Injection of Chemical Slugs

During the polymer stage of a project a succession of concentrated chemicals is injected into the formation. Many of these, such as biocides and polymers, are subject to fairly rapid degradation within the formation. Background information is assembled on the known chemical and toxicological properties of the chemicals being used, and inferences regarding synergistic effects are developed. A tracer is injected with the chemical slug to track its progress through the formation.

Production

The production stage of the project involves injection of water to force out additional oil, utilizing the polymer as a mobility control zone, and a piston. During this time surrounding freshwater zones need to be monitored regularly. Sampling wells should be spaced as closely as possible to increase the chances of early flagging of any contamination events. Since each sampling well will cost \$1,000 to \$10,000 (1980 dollars) or more to drill, a comprehensive sampling network will not be economically justifiable until a significant contamination event is suspected. Wells already completed to the freshwater formations will have to be used for sampling. If possible, freshwater sampling stations should be spaced no farther apart than four times the spacing of the oilfield's producing wells.

Samples of produced fluids will be monitored to determine the composition of the oil and brine phases, with particular attention paid to degradation products of the injected chemicals and other potentially hazardous substances.

Post-production

After the polymer project is completed, regular monitoring of groundwater sampling stations is continued, to check for fluids moving out of the former producing zone (and the disposal zone if the produced water has not been returned to the producing zone). Well pressures at a random sample of wells are monitored for unusual reservoir conditions or well failures.

If Pollutant Events Are Detected

If pollutant events are detected, then additional sampling, as outlined in Sections 5 through 8 of this report, will be required.

BEGIN
LAST LINE
OF TEXT

3/8"

-29-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

SECTION 5

IDENTIFICATION OF CHEMICALS USED IN ENHANCED RECOVERY PROGRAMS

This section discusses the selection of parameters for further consideration in the analytical stages of the design of a monitoring program. The major problem at hand is to reduce the list of chemicals to a manageable size. In eliminating a chemical from the list, the cost of monitoring must be weighed against the potential of the substance to pose an environmental threat. Monitoring costs are usually well known. The environmental hazards, on the other hand, are difficult to establish. The information herein and in Section 6 provides a variety of ways of partitioning the lists to make the selection tasks easier. There are three major sources of working lists: 1) lists of known chemicals used in the technologies assembled by the EPA (Braxton et al., 1976; Beck et al., 1980); 2) lists of chemicals covered under current regulations assembled by the DOE (Booz, Allen, and Hamilton 1978); and 3) lists of parameters that can serve as indicators of categories of contaminants. For purposes of monitoring activities, lists of parameters to be measured are most useful if arranged according to analytical methods. This task report, then, provides a discussion of the various lists of chemicals and the development of an integrated list organized by analytical techniques and discussion of the utility of the lists.

CHEMICALS USED IN EOR AND ENHANCED GAS RECOVERY PROCESSES

A wide variety of chemicals are used during the course of enhanced-recovery projects. These range from the drilling muds, added during the preliminary drilling of injection and production wells for a project, to toxic biocides and anti-corrosion additives, which are used to counteract chemical reactions that have been found to reduce the effectiveness of enhanced recovery. Despite the apparent vastness of these lists, many of the chemicals are very similar; and, in fact, groups of chemicals can each be measured through one analytical procedure.

BEGIN
LAST LINE
OF TEXT

3/8"

-31-

Preceding page blank

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

The list developed by Braxton et al. (1976) for the EPA was a preliminary one, based on a review of current practices and patent literature. This list thus includes some chemicals that although theoretically interesting are not now being considered for use in field applications. The list included as Tables 5 through 12 is a revised version of Braxton's list, which takes these changes into account.¹ To further qualify the information considered in Tables 5 through 12, a separate list has been developed, which includes only those chemicals known to be commercially available for use in EOR projects. This list of trade products, Table 13, represents those chemicals which are likely to be used in projects taking place today and in the near future. The appendix presents a list of chemicals generally in use in oil and gas development that are also used in conjunction with enhanced recovery.

CHEMICALS COVERED UNDER CURRENT REGULATORY STRUCTURE

Regulations are not usually specific with respect to chemicals used in oil and gas applications. In fact, this lack of specificity has been at the center of the controversy regarding the regulation of drilling-mud wastes and brines. The EPA is currently beginning a detailed monitoring investigation of drilling mud wastes.

In an attempt to deal with these uncertainties, the DOE developed an analysis of the currently regulated chemicals. Other relevant lists include the NIH list of carcinogens, drinking water criteria, water quality criteria, and California air quality standards.

¹The revised surfactant list (1976) is now outdated; developments since its revision are likely to have caused additions and/or changes.

BEGIN
LAST LINE
OF TEXT

-32-

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

TABLE 5. ENHANCED OIL RECOVERY: EXAMPLES OF CHEMICALS PROPOSED FOR USE AS SURFACTANTS^a

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

SULFONATES

Alfo olefin sulfonate
Alky aryl sulfonate
Alky aryl naphthenic sulfonate with monovalent cation
Hexadecylnaphthenic sulfonate
Sodium laryl sulfonate

LAURATES

p-Chloroaniline sulfate laurate^b
p-Toluidene sulfate laurate
Polyglycerol monolaurate
Triethanolamine laurate
Sodium glyceryl monolaurate sulfate

AMMONIUM CHLORIDES

Ditetradecyl dimethyl ammonium chloride
Dodecyl trimethyl ammonium chloride
Hexadecyl trimethyl ammonium chloride

MYRISTATES

Glycerol disulfoacetate monomyristate
Triethanolamine myristate

SULFATES

n-Dodecyl-diethyleneglycol sulfate
Monobutylphenyl phenol sodium sulfate
Diethyleneglycol sulfate

OTHERS

n-Methyltaurine oleamide
Morpholine stearate
Pentaerythritol monostearate
Dihexyl sodium succinate
Sodium sulfate oleylethylanilide
Triethanolamine oleate
Alkyl phenoxypolyethoxy ethanol
Polyoxyethylene alkyl phenol

^aBraxton et al. (1976).

^bHalogenated compounds, though proposed in the literature, are unlikely to be used in field operations, because their possible presence in produced oil streams would poison the catalysts at the refinery.

BEGIN
LAST LINE
OF TEXT

3/8"

-33-

BOTTOM OF
IMAGE AREA:
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

**TABLE 6. ENHANCED OIL RECOVERY: CHEMICALS PROPOSED FOR USE
AS COSURFACTANTS^a**

Alcoholic liquors
Fusel oil
Alcohols
Alkaryl alcohols
Phenol
p-Nonyl phenol
Cresol
Alkyl alcohols
Isopentanol^b
2-Pentanol^b
Decyl alcohols
Ethanol
Isobutanol
n-Butanol
Cyclohexanol
1-Hexanol^b
2-Hexanol^b
1-Octanol
2-Octanol
Isopropanol^b
Aldehydes
Formaldehyde
Gluteraldehyde
Paraformaldehyde
Amides
Amino compounds
Esters
Sorbitan fatty ester
Ketones

^aBraxton et al. (1976).

^bMost commonly used.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

-34-

PAGE NUMBER

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

TABLE 7. ENHANCED OIL RECOVERY: HYDROCARBONS USED AS A FRACTION OF MICELLAR SLUG (OR IN MISCIBLE-DISPLACEMENT PROCESSES)^a

Alkylated aryl compounds
Anthenic compounds
Aryl compounds with mono cyclic compounds
 Alkyl phenols
 Benzene
 Toluene
Acryl compounds with polycyclic compounds
Crude oil^b
Partially refined fractions of crude oil
 Overheads from crude columns
 Side cuts from crude columns
 Gas oils
 Straight run gasoline
 Kerosene
 Liquefied petroleum gas
 Naphthas
 Heavy naphthas
Refined fraction of crude oil
 Paraffinic compounds
 Decane
 Dodecane
 Heptane
 Octane
 Pentane
 Propane
 Cycloparaffinic compounds
 Cyclohexane
Naphthenic compounds

^aBraxton et al. (1976).

^bMost commonly used.

BEGIN
LAST LINE
OF TEXT

3/8"

-35-

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

TABLE 8. TERTIARY OIL RECOVERY: CHEMICALS PROPOSED FOR USE AS MOBILITY BUFFERS^a

Aldoses	B series
	L series
Amines	
Carboxymethylcellulose	
Carboxyvinyl polymer	
Dextran	
Desoxyribonucleic acid	
Glycerin	
Ketoses	B series
	L series
Polyacrylamide ^b	
Polyethylene oxide ^b	
Polyisobutylene in benzene	
Rubber in benzene	
Saccharides	
Conjugated saccharides	
Disaccharides	
Monosaccharides	
Polysaccharides ^b	
Hydroxyethylcellulose	

^aBraxton et al. (1976).

^bMost commonly used.

BEGIN
LAST LINE
OF TEXT

3/8"

-36-

PAGE NUMBER

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

TABLE 9. TERTIARY OIL RECOVERY: CHEMICALS PROPOSED FOR USE AS BACTERICIDES AND BIOCIDES^a

Aldehydes
Formaldehyde
Gluteraldehyde
Paraformaldehyde
Alkyl phosphates
Acetate salts of coco amines
Alkyl amines
Quaternary amines
Alkyl dimethyl ammonium chloride
Coco dimethyl benzyl ammonium chloride
Diamine salts
Acetate salts of coco diamines
Acetate salts of tallow diamines
Calcium sulfate
Sodium hydroxide
Heavy metal salts
Chlorinated phenols
Alkyl dichlorophenol
Pentachlorophenol
Substituted phenols
Sodium salts of phenols

^aT. J. Robichaux, "Bactericides Used in Drilling and Completion Operations," U.S. EPA Symposium on Environmental Aspects of Chemical Use in Well Drilling Operations, Houston, May 1965, p. 4.

TABLE 10. TERTIARY OIL RECOVERY: CHEMICALS PROPOSED FOR USE TO BLOCK EXCHANGE SITES IN THE FORMATION^a (PREFLUSHING)

Quaternary ammonium salts
Fluoride solutions
Potassium permanganate
Sodium hydroxide

^aBraxton et al. (1976).

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

3/8"

-37-

PAGE NUMBER

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

TABLE 11. TERTIARY OIL RECOVERY: CHEMICALS PROPOSED AS ELECTROLYTES^a

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

Acids
Hydrochloric acid
Inorganic acids
Organic acids
Sulfuric acid
Bases
Inorganic bases
Organic bases
Sodium hydroxide
Salts
Inorganic salts
Organic salts
Sodium hydroxide
Sodium nitrate
Sodium sulfate
Sodium silicate

9-1/8"

^aBraxton et al. (1976).

TABLE 12. TERTIARY OIL RECOVERY: CHEMICALS PROPOSED FOR USE TO INCREASE EFFICIENCY OF THERMAL METHODS^a

Quinoline
Sodium hydroxide
Toluene

^aBraxton et al. (1976).

BEGIN
LAST LINE
OF TEXT

3/8"

-38-

PAGE NUMBER

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

TABLE 13. EOR CHEMICAL PRODUCING COMPANIES AND THEIR PRODUCTS - SUMMARY FOR UNITED STATES^a

	Description	Use	Physical Properties
A. Amoco Chemical Company			
Surfactants:			
Amoco Sulfonate 155	a highly consistent ammonium salt of a sulfonated petroleum fraction	for use in formulating micellar fluids for enhanced oil recovery	Sulfonate activity wt % 48-52 Oil wt % 7-12 Inorganic salts wt % 15 max Water wt % 27-33
Amoco Sulfonate 151	a medium equivalent weight (420) sodium salt of a polybutene sulfonate	for use in formulating micellar fluids for enhanced oil recovery	Sulfonate activity wt % 47-52 Oil wt % 8-18 Inorganics salts wt % 15 max Water wt % 23-29
Amoco Sulfonate 152	an ammonium salt of a sulfonated petroleum fraction	for use in formulating micellar fluids for enhanced oil recovery	Sulfonate activity wt % 48-52 Oil wt % 7-12 Inorganic salts wt % 15 max Water wt % 27-33 Viscosity, centistokes @ 49° C (120° F) = 800 Density = 1.09 kg/l Flash point = 182° C Pour point = 0° C (32° F) Corrosion rate (carbon steel at 49° C) = 5 Odor, ammoniacal
Cosurfactants:			
Amoco Cosurfactant 120	an oxyalkylated alcohol w/ "unusual" phase distribution coefficient in oil/water systems	for the preparation of micellar injection fluids, can be used w/ most sulfonates at sulfonate/cosurfactant ratios up to 20/1	Density = 1.01 kg/l Pour point = 2° C Flash point = 1260° C Viscosity cp = 77

^aThis table describes the commercially available EOR injection chemicals. Ancillary chemicals such as biocides, corrosion inhibitors, and steam-drive additives are not reported on in this table. Further documentation of these products is available from the Manufacturers.

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF

IF
E

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

TABLE 13 (CONT.)

	Description	Use	Physical Properties
Amoco Cosurfactant 122	an oxyalkylated alcohol w/ "unusual" phase distribution coefficient in oil/ water systems	for the preparation of micellar injection fluids, can be used w/ most sulfonates at sulfonate/cosurfactant ratios as high as 80/1 or as low as 1/1	Density = 8.60 lb/gal Pour point = 40° F Flash point = 205° F Viscosity cp = 35.4° F
Polymers: Sweepaid 103	high molecular weight copolymer, a liquid emulsion form containing 25% polymer, 25% oil, and 50% water and is supplied with an emulsion breaker	specifically developed for EOR, to improve mobility ratios	Specific gravity = 0.33 lb/gal Pour point = -20° C Viscosity = 900 cps pH = 7.2
B. Allied Colloids Incorporated			
Polymers: Alcoflood 1200	anionic acrylamide copolymer w/ ultra high molecular weight; dry, white granular powder	mobility control in the driving fluid	Particle size = 100% through #12 mesh Bulk density = 40 lb per ft ³ pH in distilled water 1% solution @ 25° C = 5.5-6.5 In oxygen-free brine less than 10% loss in viscosity over 5 days at 175° F.
Various alsemer- polymers 507	polyacrylamides; sodium polyacrylate polymer in "micro- bead" form	for use in drilling fluids, fluid loss reducer for fresh water based drilling systems in bentonite, etc.	Particle size = 100% through #12 mesh Bulk density = 802 kg/m ³ pH of 1% solution @ 25° C = 5.5 to 6.5
Other: Antiprex A	a polymeric scale inhibitor - sodium salt of a synthetic polycarboxylic acid	for control of scale & deposit formation which restricts flow through injection & flow lines & filtering systems	Solid content = 45 ± 1% pH = 7.0-7.5 Specific gravity = 1.30 Viscosity @ 25° C = 1,400 cps

BEGIN
LAST
LINE OF
TEXT

FORM OF
SE AREA
SIDE
ENSION
TABLES
ILLUS-
TRATIONS

LIVE
TEXT
HERE

DROPPE
HEAD:
BEGIN
SECTION
HERE

TABLE 13 (CONT.)

Description	Use	Physical Properties
C. <u>Nalco Chemical Division</u>		
Polymers:		
Nalco P	is 30% by weight polymer solids	for mobility control in EOR flooding
Nal-flo P	high molecular weight, is unstabilized, develops liquid polymers	mobility-control agents
Surfactants:		
ADOFOAM BP-1 Anionic	alcohol ether sulfate	foaming agent
D. <u>DOW</u>		
A wide variety of EOR polymers: XD (series)		
	acrylamide polymers of various molecular size, in which 30% of the carboxamide groups have been replaced by carboxylate groups	mobility-control agents
Pushers/dry polymers:		
Pusher 500 Oil	an intermediate-molecular-weight anionic polyelectrolyte	mobility-control agent
Pusher 700 Oil	a high-molecular-weight anionic polyelectrolyte	mobility-control agent
Pusher 1000 Oil	an extremely high-molecular-weight anionic polyelectrolyte	mobility-control agent formulated as a hydrocarbon emulsion of water-soluble polymers
Surfactants:		
PEI 1000	cationic polymer; polyethylenamine cationic polymer; polyethylenamine	foaming agent
PEI 400		foaming agent
		N.A.
		N.A.

BEGIN
FIRST
LINE OF
TEXT
HERE

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

TABLE 13 (CONT.)

	Description	Use	Physical Properties
E. Pfizer Chemical Division			
Polymers:			
Biopolymer 1035	solution of xanthan gum; a high molecular weight heteropolysaccharide produced by the Xanthomonas campestris fermentation of carbohydrates	mobility-control agent for enhanced oil recovery	Tan gelatinous fluid Polymer activity = 2.8-3.28 Viscosity = 7,000-10,000 cp Specific gravity = 25° C 0.95 1.00 g/cc Stabilizer, formaldehyde 2000 ppm min
F. American Cyanamid			
Polymers:			
Cyanatrol the 900 series	anionic liquid polyacrylamides	mobility-control agents developed specifically for EOR	Bulk density 25° C = 8.43 lb/gal Bulk viscosity 25° C = 1,200 cps Freezing point = 18° C Flash point = 3982° C
Surfactants:			
Aerosol A-102	nonionic and anionic; disodium ethoxylated alcohol half ester of sulfosuccinic	foaming agent	N.A.
G. Aerosol OT (75% Alo)			
	anionic; sodium dioctyl sulfosuccinate	foaming agent	N.A.
Polymers:			
Xanthan Broth	a polysaccharide made by fermentation by Xanthomonas campestris	mobility-control agent for EOR	Xanthan gum % = 2.5-3.0 Viscosity = 10,000-20,000 cp pH = 6.0-7.0 Preservative = 3,000 ppm formaldehyde

TOP OF
IMAGE
AREA

BEGIN
LAST
LINE OF
TEXT

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
TABLES
ILLUSTRATIONS

BEG
FIRM
LINE
TEXT
HERE

DROPE
HEAD,
BEGIN
SECTH
HERE

TABLE 13 (CONT.)

	Description	Use	Physical Properties
H. <u>CORT (Hercules)</u> <u>N-Hance (series)</u>	polyacrylamides manu- factured "to produce" higher & more uniform molecular weights and greater polymer linearity	mobility-control agents	Viscosity = Range 6-100 cp @ 1,000 ppm
Natrosol 250 HHR	hydroxyl cellulose (HEC)	mobility-control agents	
Other EOR chemicals supplied by Hercules through CORT are cellulosic & polysaccharide chemicals.			
I. <u>Witco Chemical Corporation</u>			
Surfactants:			
TRS 10-80	petroleum sulfonate	foaming agent	N.A.
TDA-100	ethoxylated alcohol	foaming agent	
J. <u>Stepan Chemical Company</u>			
Surfactants:			
Petrosep 465	petroleum sulfonate	foaming agent	N.A.
Petrosep 450	petroleum sulfonate	foaming agent	
Petrosep 420	petroleum sulfonate	foaming agent	
K. <u>Alcolac Inc.</u>			
Surfactants:			
Siponate DS-10	dodecyl benzene sulfonate	foaming agent	N.A.
L. <u>Exxon Chemical Co.</u>			
Surfactants:			
MEAC ₁₂ OXS	Orthoxylene sulfonate	foaming agent	N.A.

BEGIN
LAST LI
OF TEX

DM OF
REA:

N
ES

AND TLEUS-
THATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

TABLE 13 (CONT.)

	Description	Use	Physical Properties
M. GAP Corporation			
Surfactants:			
Igepal CO-530	ethoxylated phenol	foaming agent	N.A.
Igepal CO-610	ethoxylated phenol	foaming agent	N.A.
N. Suntech			
Suntech 1	mixed xylenes and C ₁₂ olefin	foaming agent	N.A.
Suntech 2	mixed xylenes and C ₁₅ olefin-narrow	foaming agent	N.A.
Suntech 3	toluene and C ₁₅ olefin-narrow	foaming agent	N.A.
Suntech 4	toluene and C ₁₅ olefin-narrow	foaming agent	N.A.
Suntech 5	toluene and C ₁₅ olefin-broad	foaming agent	N.A.
Suntech 6	benzene tower feed and C ₁₅ olefin-broad	foaming agent	N.A.
Suntech 7	benzene tower feed and C ₁₅ olefin-narrow	foaming agent	N.A.
Suntech 8	benzene tower bottoms and C ₁₂ olefin	foaming agent	N.A.

BEGIN
LAST
LINE OF
TEXT
HERE

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

TABLE 13 (CONT.)

	Description	Use	Physical Properties
<u>O. MILENEA</u>			
Surfactants:			
Ampli foam™	coco amine betaine	foaming agent	N.A.
<u>P. MAGCORAR</u>			
Surfactants:			
Magcofoamer 44		foaming agent	N.A.
<u>Q. Armour Industrial Chemical Company</u>			
Surfactants:			
ARQUAD T-2C	cationic; quaternary ammonium salt		N.A.
ARMONIST #1	cationic		N.A.
<u>R. Dupont</u>			
Surfactants:			
BCO	amphoteric, C-alkyl betaine		N.A.
<u>S. General Mills</u>			
Surfactants:			
ALFOAM 3			N.A.
<u>T. Shell Chemical</u>			
Surfactants:			
Shell foam	sulfonate (probably no benzene)	foaming agent	N.A.

TOP OF
PAGE
AREA

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
PAGE AREA
INSIDE
VERSION
OF TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

TABLE 13 (CONT.)

	Description	Use	Physical Properties
<u>U. Halliburton</u>			
Surfactants:			
HC-2		foaming agent	N.A.
HOWCO SUDS			N.A.
<u>V. Rohm & Haas</u>			
Surfactants:			
TRITON QS-15	amphoteric; oxyethylated sodium salt	foaming agent	N.A.
TRITON GR-S	anionic; sodium alkylester sulfonate	foaming agent	N.A.
<u>W. Petrolite Corp.</u>			
Surfactants:			
Tret-O-lite J-9005		foaming agent	N.A.
Tret-O-lite TD-8		foaming agent	N.A.
<u>X. Adomite</u>			
Surfactants:			
Adofoam	50% active anionic surfactant	foaming agent	N.A.
<u>Y. Kelco, Division of Merck & Co., Inc.</u>			
Polymers:			
Xanflood	xanthan gum	mobility-control agent	N.A.

BEGIN
LAST LINE
OF TEXT

TOP OF
IMAGE
AREA

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

DROPPE
HEAD:
BEGIN
SECTION
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

TABLE 13 (CONT.)

	Description	Use	Physical Properties
<u>Z. Hercules Incorporated</u>			
Polymers:			
Natrosol 250 HHR	hydroxyethyl cellulose (HEC)	mobility-control agent	N.A.
<u>AA. Union Carbide Chemical Co.</u>			
Polymers:			
Polyox WSR N-3000	polythylene oxide (PEO)	mobility-control agent	N.A.
Polyox WSR 301	polythylene oxide (PEO)	mobility-control agent	N.A.
Polyox coagulant	polythylene oxide (PEO)	mobility-control agent	N.A.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

SECTION 6

GROUNDWATER SAMPLING AND ANALYSIS PROCEDURES

INTRODUCTION

Enhanced oil and gas recovery processes use and create a diversity of chemicals. To monitor the discharge of these chemicals to the environment requires many specific analytical tests and procedures. The parameters associated with these tests have been summarized in a master matrix of water-quality tests for EOR/EGR chemicals. This matrix is displayed in Table 14.

It would be desirable to reduce the number of required tests, at least initially, by performing simple screening tests which would indicate whether or not more specific testing is likely to show presence of contaminants. To that end, nonspecific tests are noted in the matrix that can serve as general indicators of the presence of a class of chemicals. Even more general screening tests are not cited in the matrix. Those general tests that might be used include:

- o Total Organic Carbon - The total organic carbon (TOC) test will generally detect all organic carbon compounds. This will include not only polymers but also oils and other oil-based hydrocarbons. Thus, TOC can indicate oil or working-fluid contamination. However, interpretation of TOC data is complicated.
- o Total Dissolved Solids (TDS) - The measurement of high TDS levels will indicate the presence of brine contamination in a sample. This can be an initial indicator of escape of reinjected or surface-disposed wastewaters.
- o pH - A sudden change in the pH values occurring at a sampling station can provide an indication of contamination by surfactants, sulfur-containing compounds, and other EOR-related chemicals.

BEGIN
LAST LINE
OF TEXT

3/8"

-49-

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

SAMPLING PARAMETERS

To design a monitoring program requires information about eight sampling parameters shown in Table 14. These eight parameters include information about the appropriate chemical tests--

1. Nonspecific Analytical Technique
2. Specific Analytical Technique
3. Technique Protocol Listing--

information concerning the ability of the techniques to detect environmental hazards--

4. Precision
5. Threshold Value/Detection Limit
6. Environmental Standard or Guideline--

and information about the effort required to carry out the tests--

7. Cost Per Sample
8. Level of Operator Training Required.

Nonspecific Analytical Technique

Each chemical group cited in the table includes a number of individual chemicals, each with its own molecular composition, physical and chemical properties, and toxicity. For some of these groups, a convenient "nonspecific" test exists that will detect the presence of some member of the group in a sample, without being able to identify specific chemicals and their concentrations. These general tests are often an appropriate screening tool, to determine inexpensively whether more detailed sampling is required at a particular sampling station and time.

Specific Analytical Technique

Techniques included in this category will detect the presence or absence of specific chemicals within a group.

Technique Protocol Listing

Techniques that are routine enough to be standardized are described by analytical protocols. The appropriate protocol references are provided in the matrix. Some of the protocols refer to techniques that are undergoing rapid development, such as GC/MS analysis. These protocols will provide only general guidelines for the analytical procedures,

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

TABLE 14. MATRIX OF MONITORING PARAMETERS

Chemical Category for EOR Use	Chemical Group	Nonspecific Analytical Technique	Specific Analytical Technique	Technique Protocol Listing	Precision %	Threshold Value (detection limit)	Environmental Standard or Guideline	Cost per Sample	Level of Operator Training Required
A. Surfactants	all surfactants		direct probe mass spectrometry ^b		>100	low ppb range ^c		\$25-100	4 yr college
	sulfonates	titration ^d		ASTM D-2330	e	e	f	\$5-10	H.S. tech.
B. Cosurfactants	alcohols		GC/FID	EPA Level II recommended	10	50 mg injected	g	\$50-100	4 yr college
	phenols	chloroform extraction		ASTM-D 1783	h	h	i	\$5-10	H.S. tech
	phenols		GC/MS	EPA Level II recommended	j	50 mg injected	i	\$50-200+	4 yr college
	aldehydes	GC/FID		EPA Level I recommended				\$50-100	4 yr college
	amides		GC/MS	EPA Level II recommended		50 mg injected		\$50-200+	4 yr college
	amines		GC/MS	EPA Level II recommended		50 mg injected		\$50-200+	4 yr college
	amines		GC/MSk	EPA Level II recommended	j	50 mg injected		\$50-200+	4 yr college
	esters		GC/MS	EPA Level II recommended	j	50 mg injected		\$50-200+	4 yr college
	ketones		GC/MS	EPA Level II recommended	j	50 mg injected		\$50-200+	4 yr college
C. Hydrocarbons	aryl compounds (incl. benzene)		GC/MS ^e		j	50 mg injected		\$50-200+	4 yr college
	alkyl phenols	chloroform extraction		ASTM-D 1783	h	h		\$5-10	H.S. tech.
	aliphatic hydrocarbons		GC/FID ^l	EPA level II recommended	10	5 mg injected		\$50-100	4 yr college
D. Mobility buffers	amines		GC/MSk	EPA Level II recommended	j	50 mg injected		\$50-200+	4 yr college
	monopolymeric sugars		GC/MS of trimethylsilyl derivatives					\$50-200+	4 yr college

TABLE 14 (CONT.)

Chemical Category for EOR Use	Chemical Group	Nonspecific Analytical Technique	Specific Analytical Technique	Technique Protocol Listing	Precision	Threshold Value (detection limit)	Environmental Standard or Guideline	Cost per Sample ^a	Level of Operator Training Required
E. Biocides	monopolymers		paper chromatography		m	m			
	polysaccharides	manual analysis by cleavage enzyme hydrolysis				n			
	aldehydes	GC/FID		EPA Level I recommended			P	\$50-100	4 yr college
	alkyl phosphates	phosphate colorimetric tests		ASTM D-515		.01-10 ppm		\$5-10	H.S. tech.
	alkyl phosphates		GC/MS		j	50 mg injected		\$50-200	4 yr college
	quaternary amines		ion chromatography		q	q		\$15-25	tech. or 4 yr college
	alkyl amines		GC/MS	EPA Level II recommended	j	50 mg injected		\$50-200+	4 yr college
	acetate salts of amines		GC/MS	EPA Level II recommended	j	50 mg injected		\$50-200+	4 yr college
	calcium sulfate		titration		e	e		\$5-10	H.S. tech.
	sodium hydroxide	alkalinity titration		ASTM D1067-1070				\$5-10	H.S. tech.
	heavy metal salts	atomic absorption			s	s		u	4 yr college
	heavy metal salts	inductively coupled argon plasma chloroform extraction			t	t		\$100 ^w	4 yr college
	phenols			ASTM-D1783	h	h	x	\$5-10	H.S. tech.
F. Chemicals used to block exchange sites	phenols		GC/MS	EPA Level II recommended	j	50 mg injected	x	\$50-200+	4 yr college
	quaternary ammonium salts	NH ₃ titration		ASTM D1426	y	y		\$5-10	H.S. tech.
	quaternary ammonium salts		ion chromatography		q	q		\$15-25	tech. or 4 yr college

TABLE 14 (CONT.)

Chemical Category for EOR Use	Chemical Group	Nonspecific Analytical Technique	Specific Analytical Technique	Technique Protocol Listing	Precision %	Threshold Value (detection limit)	Environmental Standard or Guideline	Cost per Sample ^a	Level of Operator Training Required
G. Electrolytes	fluoride solutions	distillation and colorimetric test	titration	ASTM D1179	y	10 ppb		\$5-10	H.S. tech.
	potassium permanganate				e	e		\$5-10	H.S. tech.
	sodium hydroxide	alkalinity titration		ASTM D1067-1070				\$5-10	H.S. tech.
	acids and bases salts	pH titration		ASTM D1067-1070				\$5-10	H.S. tech.
H. Chemicals used to increase efficiency of thermal methods			ion chromatography		q	q		\$15-25	tech. or 4 yr college
	sodium salts	flame atomic absorption			s	s		\$8-15	4 yr college
	quinoline		GC/MS	EPA Level II recommended ASTM D1067-1070	j	10 mg injected		\$50-200+	4 yr college
	sodium hydroxide	alkalinity titration						\$5-10	H.S. tech.
	toluene		GC/MS	EPA Level II recommended	j	50 mg injected		\$50-200+	4 yr college

FOOTNOTES:

^aCost per sample assuming 10 or more similar samples run at one time.^bDirect probe mass spectrometry achieves poor separation, so specific identification is possible only if individual peaks are not greatly superimposed on one another.^cAssuming a large sample is collected and concentrated in the laboratory.^dColorimetric titration with methylene blue measures detergent as equivalent ppm of linear alkyl sulfonate.^eFor titration tests in general:

Threshold Values	Precision (%)
10-2 M in solu.	0.01
10-5 M in solu.	0.1
10-6 M-10-7 M in solu.	0.2-1.0

(continued)

FOOTNOTES TO TABLE 14 (continued)

^fPetroleum sulfonates are considered flammable and therefore might be hazardous under RCRA. They should also be treated as potential carcinogens.

- Hexanol
 - marginal for RCRA hazardous rating on the basis of ignitability
 - aquatic toxicity over 96 hours - LC50 = 10-100 ppm
- octanol
 - OSHA limit 100 ppm
- n-butanol
 - threshold limit value (skin) - 50 ppm
 - aquatic toxicity at 96 hours - LC50 > 1000 ppm
 - hazardous under RCRA on the basis of ignitability
- tert-butanol
 - OSHA limit 100 ppm
 - hazardous under RCRA on the basis of ignitability
 - threshold limit value - 100 ppm
- iso-butanol
 - hazardous under RCRA on the basis of ignitability
- sec-butanol
 - OSHA limit 100 ppm
 - threshold limit value - 150 ppm
- cyclohexanol
 - aquatic toxicity at 96 hours - LC50 > 1000 ppm
 - hazardous under RCRA on the basis of ignitability
 - OSHA limit 50 ppm
 - threshold limit value - 50 ppm
 - aquatic toxicity at 95 hours - LC50 = 10-100 ppm

^hDetection limit - 5 ppb

Threshold Values	Precision (%)
93.5 ppb	4
48.3 ppb	6
9.61 ppb	10

- ⁱphenol - OSHA limit (skin) 5 ppm
 - threshold limit value - 5 ppm
 - drinking water standard (1962) - <1 ppb

^j35% precision for GC/MS is typical, though experienced operators can obtain somewhat greater precision.

^kGC/PID is an alternative for preliminary analysis.

^lHandling problems can be expected with lighter-gravity hydrocarbons.

^mThreshold value for paper chromatography is significantly higher than other chromatography techniques mentioned here. Similarly, precision is lower.

- ⁿpolyacrylamides - 1 ppm in potable water (ACGIH)
 - threshold value limit 0.1 ppm (skin tentative)

- ^pGlutaraldehyde - threshold value limit - 2 ppm
 - threshold value limit - 2 ppm

FOOTNOTES TO TABLE 14 (continued)

^QDetection limit: low ppb range - up to 50 ppb precision is 1-10%.

^TFlame atomic absorption or graphite-furnace atomic absorption, for example, depending on which metals are being examined.

^SFlame AA detection limit: low ppm to high ppb range - at 1-10 ppm, precision is 1-2%; graphite furnace AA - at 20-100 ppb, precision is 5%.

^tInductively coupled argon plasma detection limit: 10-20 ppb - at 100-300 ppb, precision is 3%.

^UFlame AA - \$8-15/sample, graphite furnace AA - \$12-25/sample.

^WICAP is a multi-element technique. Several elements can be measured in a single analysis, so for a wide scan it can be cheaper than AA.

^X2,4,5-trichlorophenol - threshold limit value - low (very toxic)

pentachlorophenol - aquatic toxicity at 96 hours -
LC₅₀ < 1 ppm

phenol

- OSHA limit - 55 ppm (skin)
- threshold limit value - 5 ppm
- drinking water standard
(1962) - 1 ppb

^YAt 0.5 ppm, precision is 3%.

^ZPrecision was 9% at 0.81 ppm.

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

leaving the details of the analysis to the judgment of the chemist. For other sophisticated tests, such as inductively coupled argon plasma, standard protocols are not appropriate, since the technique is too new and complicated. Thus, analytical procedures are standardized only to a limited extent, depending for the validity of the data on the training and experience of the analyst.

DROPPED
HEAD,
BEGIN
SECTIONS
HERE

Precision

The techniques differ in their precision. Precision can be affected by the operator experience and training.

Threshold Value

The threshold value of a test usually must be less than or equal to one-half of the applicable environmental guideline for the technique to be a useful monitoring tool.

Environmental Standard or Guideline

Environmental standards have not yet been developed for many of the chemicals of concern. (See Beck et al., 1980, and Silvestro et al., 1980). This information gap is a problem in the development of effective monitoring programs.

Cost Per Sample

Costs per sample have been developed assuming: a) 1980 prices, 1980 dollars; b) commercial laboratories perform the testing; c) samples are run in batches of at least ten samples. Costs for sample transport are not included.

Level of Operator Training Required

The quality of the operators performing the chemical tests is a principal variable controlling the value of monitoring data. Use of inexperienced or undertrained technicians can invalidate monitoring data. Required training levels included in the matrix are the generally recognized minimums. Use of operators with several years of experience can result in better accuracy and consistency. Laboratories should be under the supervision of a Ph.D. chemist or the equivalent. Laboratories should meet appropriate state and EPA laboratory-approval tests.

APPLICABILITY OF THE TECHNIQUES

Sample volume and cross-constituent interference limit the applicability of some of the techniques. Required sample

BEGIN
LAST LINE
OF TEXT

3/8"

-56-

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

volumes will increase rapidly as desired detection limit decreases, so that no simple values could be entered into the matrix. Presence of a complicated hydrocarbon component in the sample may necessitate multiple solvent separations and extracts to isolate the sample fraction to be analyzed. Presence of a high total-dissolved-solids component can decrease the sensitivity of other tests.

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

6-1/2"

9-1/8"

BEGIN
LAST LINE
OF TEXT

3/8"

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

-57-

EPA Form 2350-4 (4-80)
(PREVIOUSLY CEN EPA FORM 267)

U.S. GOVERNMENT PRINTING OFFICE: 1980-000-639

TYPING GUIDE SHEET

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

SECTION 7

MONITORING PROGRAM DESIGN CONSIDERATIONS

Design of an effective yet realistic groundwater monitoring program is a difficult analytical problem and is impeded by the lack of information about the baseline quality of aquifers and the pollutant pathways that are required in making informed decisions. Generally, it is much easier to design a monitoring program on the basis of a specific type of pollutant event or track to a specific pollutant incident. Unfortunately, often a pollutant event will remain undetected for long periods of time, being noticed only after an aquifer has been subjected to low levels of pollution over several years. Thus, it is necessary to conduct some form of regular monitoring of aquifers that may be affected by an EOR project.

9-1/8"

DESIGN ISSUES

The major problems to be addressed in the enhanced-recovery environmental monitoring manual are as follows:

1. How should monitoring stations be located to ensure an acceptable probability that any discharges from the recovery processes are detected?
2. What combination of measurements, number of stations, and frequency of sampling provides the best information value per dollar expenditure?
3. How can all of the various monitoring variables be standardized sufficiently so that different recovery projects can be compared, and so that time-series analysis can be carried out?
4. Which procedures need to be followed to ensure that the measurements taken constitute meaningful information?

BENEFITS MEASURES

BEGIN
LAST LINE
OF TEXT

The design of an efficient monitoring program requires that the benefits of monitoring be identified. Benefits of EOR

3/8"

-59-

Preceding page blank

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

groundwater monitoring will include detection and prevention of environmental risks and evaluation of environmental control investments. To each general benefits category (Table 15) a variety of indices and variables can serve as measures to meet that monitoring need. For example, indices of cancer mortality per 1,000,000 individuals may serve as a measure of human health risk.

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

The first step in specifying these benefits is an evaluation of the enhanced-recovery processes and the nature of the pollutant events that may be expected. This first step was carried out as part of the recently completed project performed by MERL (Beck et al., 1980). This tells us the types of risks that a monitoring program should be designed to detect. The next step is to identify measurements that can be made to characterize the pollutant events. An enumeration of measures is provided in Section 6. The next step is to determine range of values, variability and statistical characteristics of contamination events using a body of historical data relative to past pollutant events. This cannot now be adequately carried out due to lack of historical data.¹ A substitute analysis, carried out on an a priori basis, makes up the body of Section 8 of this report. This tells us how intensively the risk indices should be measured to obtain meaningful information.

Table 15 summarizes the categories of costs and benefits that enter into the design of an EOR/EGR monitoring program. In addition to the benefits identified in Table 15, there is another purpose for monitoring investments, which does not appear in that list because it is an "intermediate" benefit; that is, it is a tool for the accomplishment of the other purposes. That benefit is the development of Baseline Information.

Dollar values and manpower values can easily be placed on the cost elements, as has been done in Section 6. The measures that should be used for the other benefits are less straightforward. Some of the possible uses of a monitoring program and the way to express their benefits are discussed below. The objectives discussed are: (1) baseline data assembly, (2) detection of trends and violations of standards and (3) detection of previously unrecognized pollutants.

¹Historical data that could be used for this work are lacking mainly because (1) few significant pollutant events have been identified and (2) no environmental monitoring programs are in place with EOR or EGR projects.

BEGIN
LAST LINE
OF TEXT

3/8"

-60-

PAGE NUMBER

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLU-
STRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

TABLE 15. EOR/EGR ENVIRONMENTAL MONITORING COSTS AND BENEFITS

Costs	Benefits
Dollar costs of monitoring tests	Identification of public-health risks
Manpower costs of monitoring	Detection of violations of regulations
	Identification of ecosystem risks
	Identification of other environmental risks (aesthetics, resource preemption, synergistic effects, intermedia effects)
	Identification of previously unrecognized pollutants
	Detection of degradation trends at levels below currently recognized risk thresholds
	Detection of chemical or hydrocarbon losses (economic benefit)
	Evaluation of the effectiveness of control investments

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DEVELOPMENT OF BASELINE DATA

There are two alternate strategies for the development of a baseline for EOR/EGR environmental studies. One is to evaluate environmental insults on a site-specific basis; the other is to look at the national or regional picture. To some extent, both must be done. Environmental control of EOR/EGR activities merits significant attention if the potential overall impacts are significant, compared with other energy alternatives. Also, violations of regulations at any site cannot be ignored. Regulatory agencies -- i.e., those of the DOE, EPA, and California Air Quality Control Board -- will mainly require regional and national data to evaluate the effectiveness of their programs. Operators will only have use for an approach applicable to their own specific projects. Each approach will have different statistical and information requirements.

Regional Approach

The regional approach requires the development of average values and spatial and temporal variabilities for a relatively small number of key stations. The key stations are selected to represent the range of conditions relevant to the technology and medium of interest. The conditions that need to be represented are as follows:

- Geological characteristics
- Connate-water chemistry
- Aquifer characteristics
- Types of disposal formations
- Technology options
- Age of field operations

Generally, a minimum number of observations will be required to characterize each condition, depending on the variability of the parameter being considered. This minimum number can be achieved by some combination of repeat observations at a station and synoptic measurements at several stations. Once the basic statistics have been statistically characterized, additional stations or observations will provide minimal informational benefit.

BEGIN
LAST LINE
OF TEXT

3/8"

-62-

PAGE NUMBER

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

Site-Specific Approach

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

The site-specific approach involves investigation of possible routes of contamination and directions of contaminant flow. The approach includes reservoir and aquifer dynamics. A synoptic data set covering the area influenced by the project is required; a time series adequate to characterize local patterns is also required for several key stations. Baseline data gathering should be kept to the minimum required to characterize levels of indicator parameters. Without specific cause for carrying out detailed monitoring at specific stations, large bodies of useless data could easily be assembled.

DETECTION OF TRENDS AND VIOLATION OF STANDARDS

Violations of regulations are usually measured as frequency of observations exceeding a reference level. The statistics that govern trends in frequency of occurrences of a condition are different from the statistics that govern trends in annual means.

No reference levels (i.e., standards or criteria) currently exist for most of the chemicals identified in Table 13 and Appendix A. The lack of firm reference criteria makes the use of these benefits measures difficult. Thus, development of usable reference values should be undertaken by the monitoring agencies. The status of reference values is as follows:

Public-Health Risk. Drinking-water standards and water-quality criteria exist. However, these standards do not cover most of the organics relevant to EOR/EGR. The NAS (1977) lists of suspected carcinogens came closest to considering the relevant variables. U.S. DOE research is currently under way on this topic. Air-quality standards exist, but these standards do not cover the trace organics.

Reinjection, Subsurface, Waste-Injection Regulations do not specify quality criteria.

RCRA. Guidelines for drilling muds and oilfield brines are currently being developed by the U.S. EPA.

Ecosystem Risks. No guidelines exist relative to subsurface waters. Water-quality criteria cover few of the relevant chemicals. Visibility criteria exist.

Other Environmental Risks are difficult to quantify.

BEGIN
LAST LINE
OF TEXT

3/8"

-63-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

IDENTIFICATION OF PREVIOUSLY UNRECOGNIZED POLLUTANTS

A monitoring program that is intended to identify previously unrecognized pollutants involves broad-based measurements with low expectation for informational benefits. Indices of the informational value of such a monitoring plan include:

1. Classes of chemicals measured: A monitoring program is beneficial to the extent that it provides measurements of a wide range of chemicals: detection of presence/absence is the main criterion.
2. Media sampled: A monitoring program is beneficial to the extent that it provides a scan of the range of possibly polluted media with a spatial coverage of each medium.
3. Temporal Sampling: A monitoring program is beneficial to the extent that it can detect pollutants that may be subject to irregular occurrence at sampling stations.

A suitable measure of of the potential informational benefits of a program designed to screen for new pollutants would be of the following form:

$$I = F_1(C)^{w_1} (MN)^{w_2} (f)^{w_3}$$

where $w_1 \gg w_2 + w_3$

I = index of likelihood of detecting previously unrecognized pollutants

$F_1(C)$ = index of the classes of chemicals measured

M = number of aquifers sampled (of total aquifers bodies impacted)

N = average number of samples per aquifer

f = average frequency of sampling per station

w_1, w_2, w_3 = weighting factors for the three indices.

The best monitoring strategy will yield a maximum value of I within a given budgetary constraint.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

-64-

PAGE NUMBER

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DETECTION OF CHEMICAL OR HYDROCARBON LOSSES

Some monitoring strategies screen for potential pollutant events by monitoring chemical and/or hydrocarbon losses from the oil reservoir. These strategies include monitoring of well pressure, monitoring of movements of tracer chemicals, and development of data for periodic mass-balance accounting. Benefits of these monitoring activities may be measured as the dollar savings caused by reduced-volume consumption of chemicals and increased recovery of oil or gas. Estimated savings are calculated in terms of a site-by-site assessment of risks of losses that are usually calculated during the project engineering; or they can be calculated generally, as in the 1976 EPA study (Braxton et al., 1976).

EVALUATION OF THE EFFECTIVENESS OF CONTROL INVESTMENTS

Monitoring programs to evaluate effectiveness of control investments will compare the performance of controls with regulating standards and/or design criteria. This will involve the statistical issues discussed above. Making comparisons requires pairs of observations "upstream" and "downstream" of controls before and after their application. For controls aimed at maintenance of groundwater quality, "upgradient" and "downgradient" pairs may not be easy to establish, and groups of stations may be required to define the "up" and "down" gradient conditions.

POLLUTANT INDICATORS

Enhanced-recovery activities use a wide variety of chemicals. Comprehensive monitoring for each potential pollutant (including primary pollutants, degradation products, and synergistic pairs) will require extensive budgetary commitments. The measurement of indicator parameters rather than specific chemicals provides less detailed and less precise information; but it is a more certain way of obtaining useful returns for a given level of investment.

Various indicators that might be used to detect relevant pollutants are as follows:

1. Total Organic Carbon. Total organic carbon provides a measure of the presence of all chemicals soluble in a given solvent, such as methylene chloride. Monitoring TOC in the vicinity of EOR projects can be expected to detect the presence of organic polymers, organic biocides, hydrocarbons, and miscellaneous other

BEGIN
LAST LINE
OF TEXT

3/8"

-65-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

organic additives used in oil operations. The TOC measure could be used as a screening tool; if adverse trends are observed, then further, more specific analytical tests would be triggered.

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

2. Methylene Blue Active Substances. The MBA test quantifies the presence of methylene blue active chemicals, which mainly include a large class of surfactants. Monitoring MBA in the vicinity of EOR projects can be expected to detect the presence of surfactants. The MBA test is a general screening tool, aimed at a more restricted list of pollutants than the first test.
3. Conductivity. The conductivity test is a surrogate measure to determine the general presence of salts. The measurement of conductivity in the vicinity of EOR/EGR projects can serve as a screening tool to detect the presence of brines in water bodies.
4. Reservoir Pressure. The pressure maintained within the oil-bearing formation provides a monitor on escape of fluids away from the intended pathways. These monitoring activities are usually carried out as part of good reservoir engineering practices.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA:
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

3/8"

-66-

PAGE NUMBER

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

SECTION 8

PLACEMENT OF MONITORING STATIONS AND FREQUENCY OF SAMPLING

INTRODUCTION

This section adopts two separate approaches for determining appropriate placement and sampling-frequency designs for underground monitoring stations. The first method applies to detection systems, or systems designed to monitor before and just after a pollutant event occurs. The second method applies to event-monitoring systems that are designed to monitor the progress or extent of a contaminant plume. While detection-system monitoring stations must be operational before the event, an event-monitoring methodology is likely to be applied after the event to determine where to drill new wells or take above-ground measurements and how frequently to do so.

The following outlines the three subsections below that address issues of sampling frequency and station placement:

1. The first section discusses the differences in emphasis between systems designed before and after the pollutant event has occurred.
2. The second section discusses the proposed methodology for designing a pollution-event detection system.
3. The third section discusses the methodology for monitoring in response to pollutant events and the equations for the chemical-fate modeling of water-miscible and -immiscible pollutants in groundwater.

BEFORE VS. AFTER A POLLUTANT EVENT

The considerations affecting spatial placement of monitoring stations are different before and after a pollutant event has occurred. Before a pollutant event occurs, the emphasis is on early detection leading to monitoring for contamination close to possible sources,

BEGIN
LAST LINE
OF TEXT

3/8"

-67-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

whereas after an event the emphasis is on determining the extent of contamination, which may require monitoring far from the source.

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

Similarly, for detection capability the density of monitoring stations should be high, whereas for delineating the extent of contamination the stations should be more widely spaced.

For these reasons, the design of a detection and an event-monitoring system have only a weak linkage. As a detection system requires greater accuracy, higher sampling frequencies, and fewer stations than an event-monitoring system, data collection by well samples is appropriate. For an event system, however, less expensive methods will suffice. This is not to say, of course, that an event-monitoring system should not use detection techniques, particularly if there are water wells in the field that can easily be used for monitoring. The point is that monitoring techniques are likely to be more cost-effective than drilling new wells.

The use of less expensive data-collection techniques for event-monitoring systems should be more than compensated for by a program of computer-based miscible or immiscible transport models. As it is doubtful whether these models can be adequately calibrated without a pollutant event, they play a less prominent role in "detection" systems.

Chemical-fate mathematical models fall into two categories: miscible and immiscible pollutant models. While brines and biocides are soluble in water, oil and surfactants are not. Briefly, the latter (immiscible case) equations must be written for the movement of both the water and nonwater phases, while in the former (miscible case) an equation for transport in the water phase only is developed.

DESIGN OF A POLLUTION-EVENT DETECTION SYSTEM

The design of a detection system has two phases: the first is a "baseline" analysis, characterizing TDS, BOD, organic-carbon, etc., and other levels before an event, and the second phase is the design of the monitoring system itself.

The purpose of the first phase is to take out all "trends" or explainable variations in groundwater quality, so that residual variation is uncorrelated (a white noise).

BEGIN
LAST LINE
OF TEXT

3/8"

-68-

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

Seasonal trends in groundwater quality have been noted frequently in the literature; other possible trends include a straight-line time dependence, correlation among levels of chemical constituents, correlations among nearby wells, and relations of concentrations to the level of the groundwater table and volume of water pumped.

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

Once all trends have been removed, the standard deviation of the residuals is taken to serve as an indication of the reliability of sampling. A well with a standard error of σ on a given pollutant measure would yield a standard deviation of $\sigma/\sqrt{n}$ if sampling results were averaged over n time periods.

The second phase of monitoring station design takes as input the expected value of an indicator at a given time, $\mu(t)$, and the calculated standard deviation σ . These parameters are used to set up threshold levels for detection; as only upper thresholds are likely to be useful, a value of $\mu + (S\sigma/\sqrt{n})$ represents the threshold level, where S = a factor between 2 and 4. The value selected will reflect a judgement on the importance of early detection and the degree of inconvenience you wish to bear from false alarms due to random variation.

9-1/8"

The following outlines the aspects of detection systems to be discussed in the next few pages:

- A. The model to be used for determining spatial arrangement and sampling frequency, its limitations and data requirements.
- B. Issues of detection power.
- C. Formulas for spacing and frequency of monitoring.
- D. Refinements to the model.

A. The Model

The subsurface dispersion model equations developed in Appendix B are based on a second-order, linear differential equation which depicts underground convection-diffusion phenomena. This analysis assumes that aquifer flow is constant in direction and magnitude and also that underground diffusion properties are uniform in the region of the spill. Since detection monitoring stations are to be placed close together, each covering only a small zone, variations in flow and diffusion may be neglected without seriously affecting results.

BEGIN
LAST LINE
OF TEXT

3/8"

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

The purpose of the detection monitoring system is to detect contamination as soon as possible. The model permits prediction of the length of time, t_0 , required to detect a leak depending upon values of spill size and concentration, spacing of stations, groundwater flow, local diffusion rates and the time interval between samples. Because the concentration profile could range from an initial burst to a slow leak, a worst-case approach is adopted. An initial-burst leak that quickly damps out is the hardest to detect. Consequently, the solutions for monitoring system design drawn from the model will be fitted to the detection of this case.

Data Requirements--

The parameters of the model are given in Table 16. It is seen that considerable geological and production information is needed to specify the model parameters. However, as detection stations are likely to be placed close to sources and as geological and production information should be available for existing wells, collection of necessary data should not require additional geological measurements.

The concentration of a pollutant at a given point in space $C(x,y,t)$ is illustrated as a function of time and model parameters in Figure 9. The x-coordinate signifies the direction of aquifer flows and the y-coordinate, its perpendicular in the horizontal plane.

TABLE 16. MODEL PARAMETERS

Parameter	Physical measurements that must be made to determine parameter
V - velocity of groundwater motion	Transmissibility, level of groundwater table near pollutant surface
D - diffusion coefficient	Pollutant mobility; for immiscible fluids, water saturation viscosity; porosity; permeability of area near source
P - level of initial burst	In an injection well, volume of fluids injected per second; or in a producing well, volume of produced fluids per second

BEGIN
LAST LINE
OF TEXT

3/8"

-70-

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

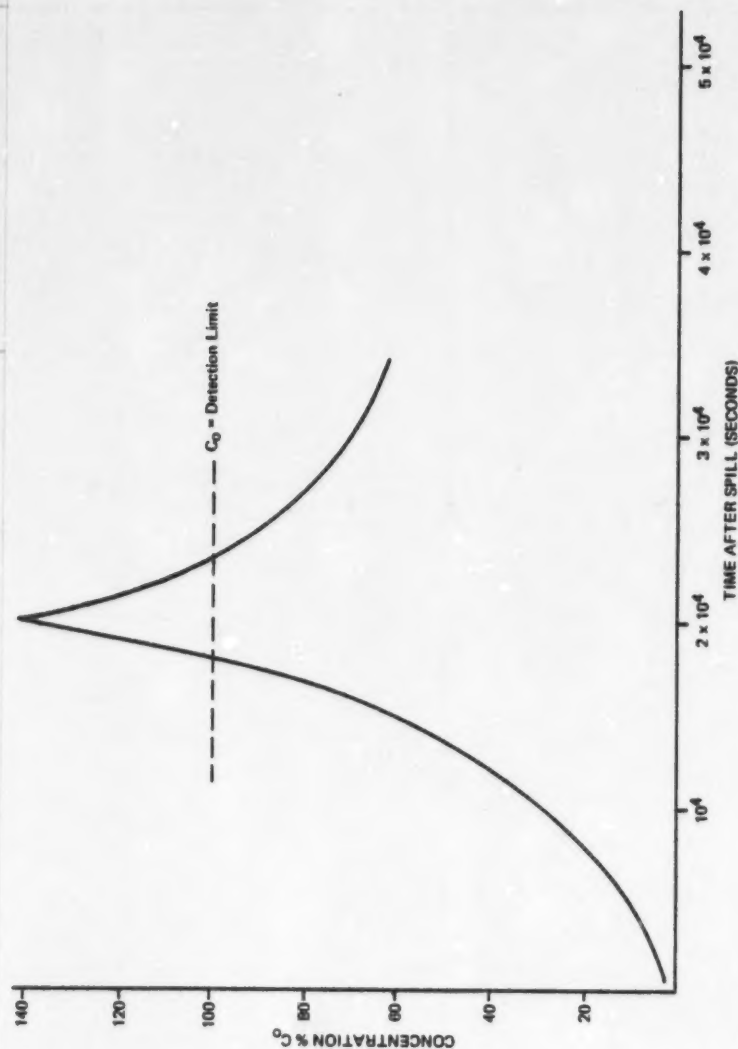


Figure 9. Concentration as a function of time for a groundwater sampling well 500 m downstream from a burst leak source; Groundwater Velocity=.01 cm/sec; Dispersion Rate=5 times groundwater velocity. Example chosen is a sand aquifer with relatively fast transport.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

Limitations--

It should be stressed that while the modeling developed in equations B-1, -2, -3 and -4 of Appendix B and illustrated in Figures 10 and 11 is inadequate for the modeling of pollutant fates to be conducted in an event-monitoring system, it gives considerable insight into considerations for detection-system design. The model does not take into account possible variations in permeability and porosity nor, more seriously, variations in directions or magnitude of groundwater flow. As is shown in Subsection D below, once an understanding of the basic forces influencing system design is achieved, solutions to these objections will suggest themselves.

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

B. Detection Power

As has been mentioned in the introduction, baseline sampling provides us with an expected value for a measured variable and a standard deviation. Levels more than $S\sigma/\sqrt{n}$ above the baseline mean μ are cause for sounding an alarm, where n is the number of samples averaged for the purposed of reducing false alarms.

9-1/8"

The approach taken in the following sections is to design a system that will be likely to detect levels above the mean of $S\sigma$ or greater, within a time of t_0 after the event, using only one sample. An added benefit is that levels of $S\sigma/\sqrt{n}$ or greater may be detected by averaging over n samples. As a result, a graph of the minimum deviation detectable within a given period after the event, with confidence factor S , would plot $S\sigma/\sqrt{n}\Delta t$ versus $n\Delta t$, where Δt is the sampling interval.

C. Derivation of Spatial and Frequency Relations

The progress of a contamination plume will resemble Figure 12.

As can be seen, the "center of gravity" of the plume progresses at a speed of V in the x direction, while the width of the plume in the y direction is proportional to the dispersion coefficient D .

Equation B-4, which generated the plots in Figure 12, is reproduced below.

BEGIN
LAST LINE
OF TEXT

3/8"

-72-

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

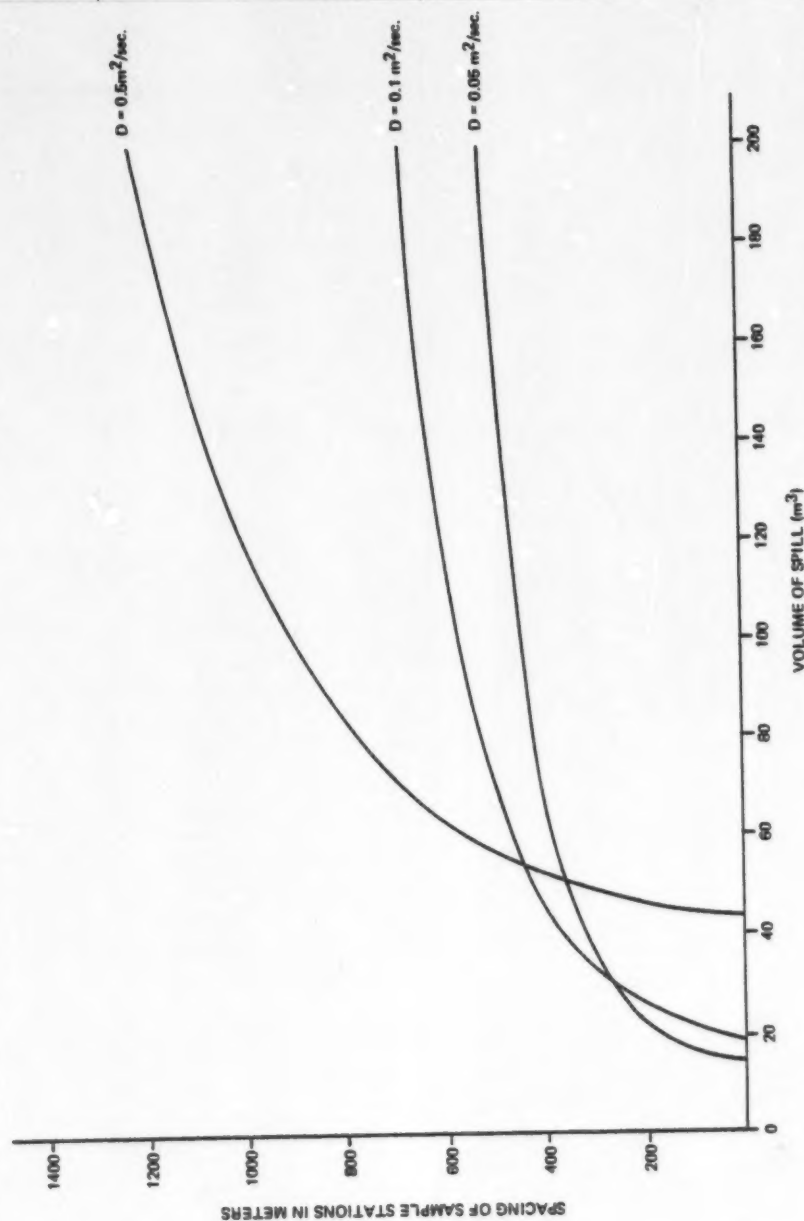


Figure 10. Spacing of sampling stations as a function of spill volume and dispersion rate, D.

BEGIN
LAST LINE
OF TEXT

3/8"

-73-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

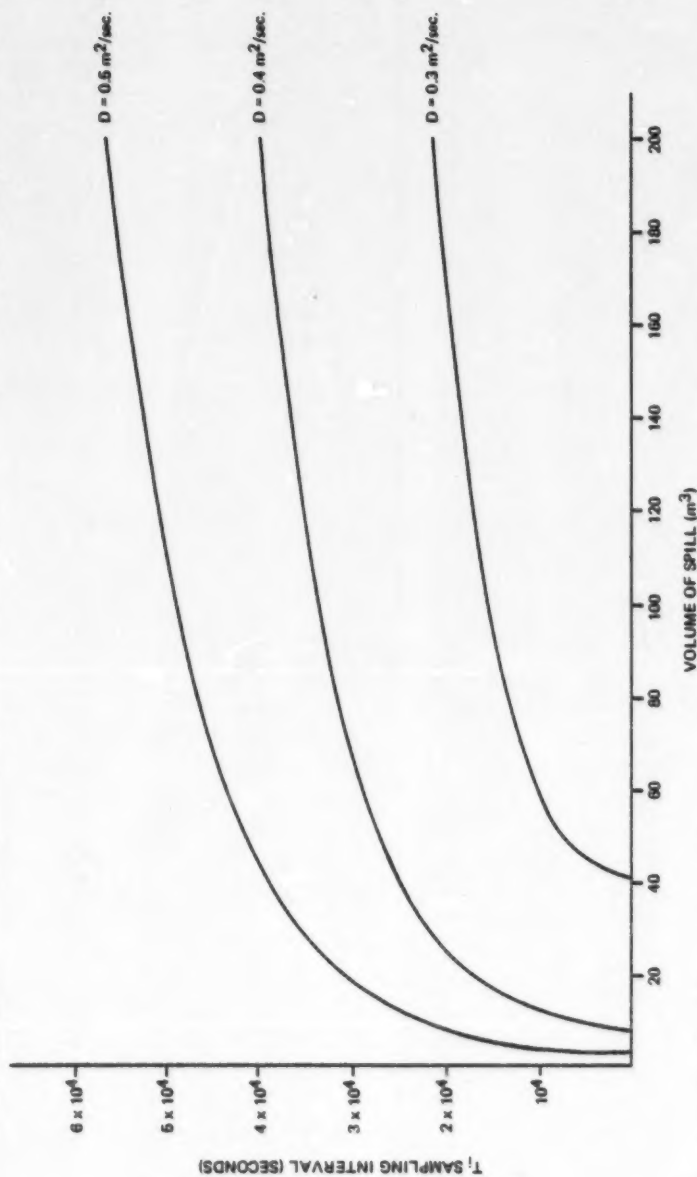


Figure 11. Sampling frequency as a function of spill volume and dispersion rate, D .

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA.
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

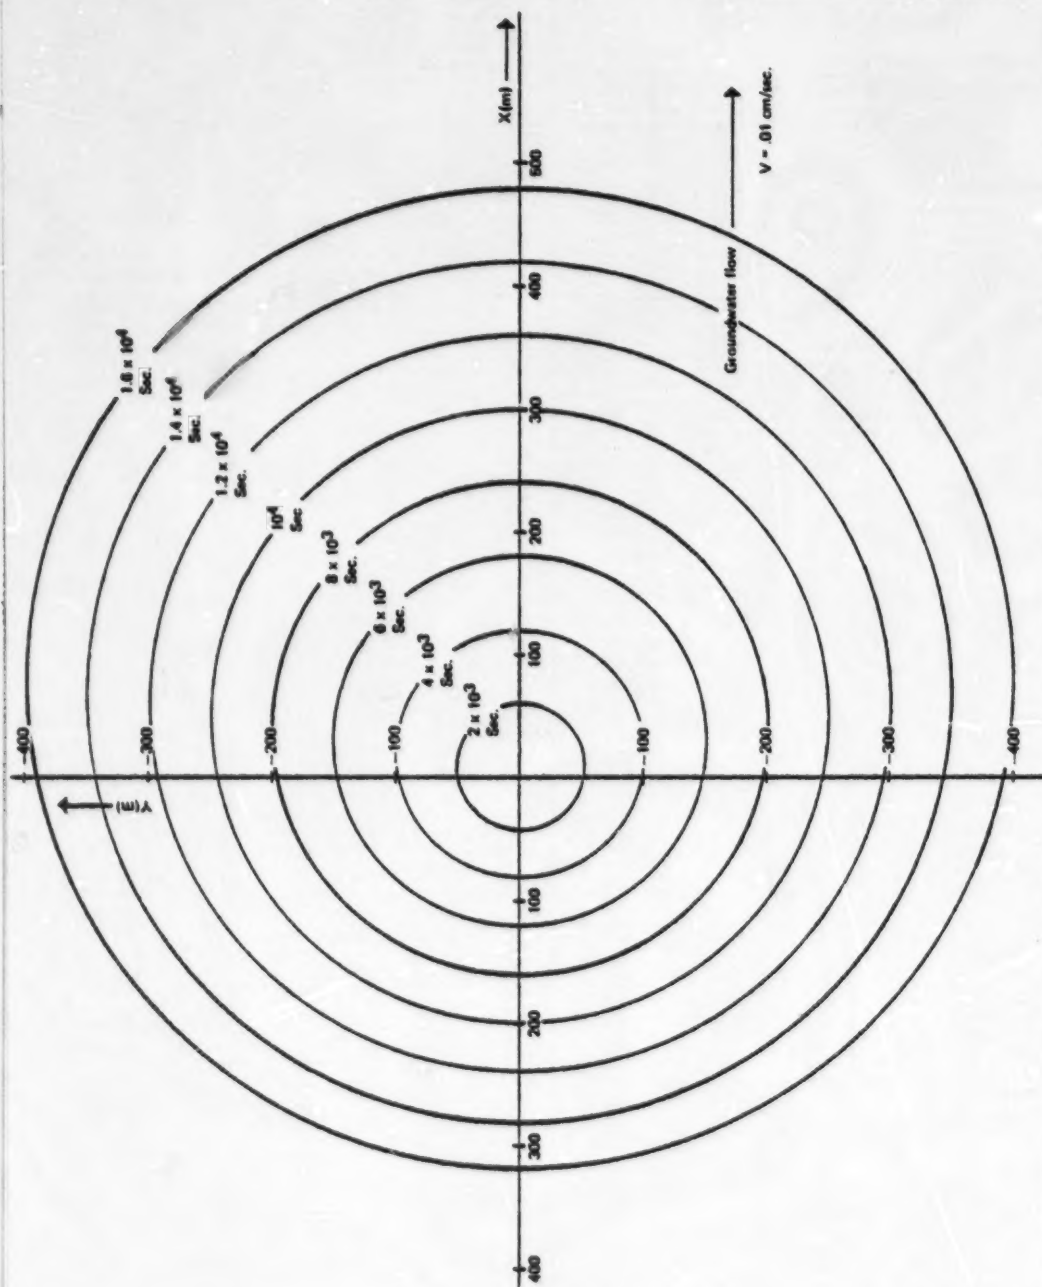


Figure 12. Progression of burst leak; dispersion rate = 5 times groundwater velocity.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

-75-

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

$$C(x,y,t) = \frac{P}{(2\pi)^2 Dt} e^{-[(x-Vt)^2 + y^2]/2Dt} \quad (B-4)$$

Our goals in detection-system design are:

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

1. To detect a minimum concentration above baseline of $S\sigma$ in one sample.
2. To do so before time t_0 .

As was shown in Figure 9, a principal problem in accomplishing these objectives is inadequate density of monitoring stations, so that contaminant plumes "slip through." If we can calculate the width of the contaminant plume in the x and y directions at time t_0 , and we space monitoring at one-half this width, our problem is solved.

Based on the derivation of equations B-5 to B-10 in Appendix B, an initial array of monitoring stations, suitable for delimiting the contaminant plume at time t_0 , may be developed. Table 17 gives station locations and sampling frequencies. Figures 10 and 11 illustrate the variations in locations and frequencies as a function of spill volume and diffusion rate for a set of hypothetical conditions.

Consult Aris (1978) for background information.

D. Justification of Results

It is important to check whether the results we have developed agree with intuition. Let us consider the formula for the x spacing,

$$\Delta x = 1/2 \sqrt{2Wdt - y^2} \quad (B-8)$$

W is the parameter that represents the accuracy of detection; as C_0 , the minimum concentration detectable, decreases, W increases, although slowly. Because of this increased accuracy, stations may be placed farther apart, and Δx increases. As y increases, and we get farther from the source, stations must be placed closer together. This is because the plume becomes narrower in the x direction as y increases. Beyond $y^2 = 2Wdt_0$, stations become useless, as contaminant levels are undetectable.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

3/8"

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

TABLE 17. STATION LOCATIONS AND SAMPLING FREQUENCIES
(See Fig. B-1 on pg. 127)

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

Station Location	Sampling Interval
$(Vt_o, 0)$	$\frac{1}{V^2} \sqrt{4W^2 D^2 - 8Vt_o W^2 D}$
$(Vt_o, 1/2 \sqrt{2WDt_o})$	$\frac{1}{V^2} \sqrt{4W^2 D^2 - 10V W^2 Dt_o}$
$(Vt_o, -1/2 \sqrt{2WDt_o})$	$\frac{1}{V^2} \sqrt{4W^2 D^2 - 10V W^2 Dt_o}$
$(Vt_o + \sqrt{2WDt_o}, 0)$	$\frac{1}{V^2} \sqrt{4W^2 D^2 - 8VWD [Vt_o + 1/2 \ 2WDt_o]}$
$(Vt_o - 1/2 \sqrt{2WDt_o}, 0)$	$\frac{1}{V^2} \sqrt{4W^2 D^2 - 8VWD [Vt_o - 1/2 \ 2WDt_o]}$

9-1/8"

The formula for y spacing may be similarly interpreted. For values of x such that $(x-Vt_o)^2 > 2WDt_o$, stations become useless. From another point of view, for values of t such that the equality no longer holds, sampling stations at point x with $y > \Delta y$ become useless. Thus, for monitoring of a burst leak, stations have a finite useful life.

The formula for Δt is seen to decrease in V^2 , and to increase in D and W. This is intuitively correct, as quicker sampling is required to "catch" events in quicker flowing aquifers. As accuracy increases, aquifers need not be sampled so often.

MONITORING IN RESPONSE TO POLLUTANT EVENTS

Enhanced recovery groundwater pollutant events will involve diverse pollutant-transport routes. Contamination may occur as a result of well-casing leaks, spills of chemicals or oils in holding tanks, or communication between subsurface formations, for example. Each pollutant event will require a unique detection and monitoring program, in which sampling stations are selected to conform with the expected speed and direction of travel of the pollutants, sampling intervals conform to the expected rate of degradation of the pollutant, and analytical procedures are selected according to the chemical nature of the pollutant. This discussion presents an overview

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

-77-

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

of the transport models that can be used in the design of a sampling program to track a pollutant event.

Information Needs

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

The detection of groundwater pollutant events should not be a statistical question. That is to say, chemical tests should be chosen so as to delimit very clearly between pollutant events and normal circumstances, such that it is unnecessary to filter out "noise." To determine which chemical tests should be performed to detect EOR chemicals for accidents at site, it is important to collect the following information:

- o A table of "likely" concentration levels of EOR chemicals in every EOR process in injected and produced waters, in addition to levels in the reservoir formation.
- o A table of contamination scenarios, listing for each scenario the groups of pollutants that are likely to be released together, concentration estimates, and relative mobilities. For example, a leaky injection well will result in pollution by EOR chemicals at full strength, but little brine or oil contamination; fractures in the formation will result in higher levels of brine and oil and less of EOR chemicals. Brine contamination travels much more quickly than polymer does.
- o A summary of the relevant EOR chemical degradation processes and by-products.
- o A table of "likely" background values for TDS, BOD, TOC, Methylene Blue Active Substances, etc., in the local aquifers.

The above information will allow one to discern which chemical tests have high detection power for a particular pollutant event.

It is important to realize that once this information is assembled and tests are selected for the monitoring program, little attention will have to be paid to the collection of baseline data.

Classing EOR Pollutants According to Physical Properties

Surfactants and polymers are used in enhanced oil recovery because they decrease the mobility of injected water (and therefore the rate of flow through porous rock), thereby better

END
LAST LINE
OF TEXT

3/8"

-78-

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

matching the mobility of injected fluids with that of the reservoir oil. Because of the alteration in fluid properties brought about by even the small concentrations of polymers and surfactants in conventional water, models of contaminant transport in aquifers are inappropriate for modeling pollutant events involving these chemicals. Conventional models of miscible transport, such as those developed by Pinder (Bredehoeft and Pinder, 1973; Gray and Pinder, 1976; Bender et al.) can be applied to brine and biocide contamination. A summary of the classes of models (miscible, immiscible, fluid-altering) is provided in Table 18.

TABLE 18. POLLUTANTS AND CLASSES OF TRANSPORT MODELS

Classes of Models	Miscible	Immiscible	Fluid-Altering
Pollutants	Biocides Brines	Oil	Polymers Surfactants

It is important to realize that these models may be combined to model any combination of pollutants escaping together or separately.

In the next few pages, the following information will be given for each of these models:

- 1) A summary and explanation of the mathematical equations
- 2) References for computer codes, numerical solutions, and in-depth explanations
- 3) A summary of the data necessary to operate the models

Overview of the Equations

From a physical perspective, all the models to be discussed are derived from three equations: those of (1) mass conservation, (2) Darcy's law, and (3) convection-diffusion. Mass conservation is a physical law, while Darcy's law is an empirically verified principle (not unlike Ohm's law); the convection-diffusion equation resembles

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

a mathematical model, as it combines several diffusion mechanisms in one equation.

Definition of Terms

The effective porosity maximum $\phi_e(x)$ of porous rock is defined as the fraction of rock volume that may be filled by a fluid. Only connected pores contribute to effective porosity.

The pores may be filled wholly or partially by fluids. In an oil-bearing formation, these would be brine and oil; in an aquifer, water. The saturation $S(x)$ with respect to a given fluid is defined as the fraction of available pore space occupied by the fluid at point X.

The capillary pressure P_c is defined as the total pressure within the pores due to all fluids.

The relative permeability k_{ri} is a function of the saturations of other fluids present in the pores, which ranges from 0 to 1. It must be determined experimentally from cores.

Immiscible Flow Equations

Overview--

To model the flow of immiscible fluids in porous media (oil in water or water in oil), two mass-conservation and Darcy's-law equations are used, one of each for the miscible and immiscible phases. The equations are coupled by relations between the pressure and saturations of the wetting and nonwetting phases. It is important to remember that there are only two free variables in the equations. These may be thought of as S_w , the water saturation, and P_w , the pressure due to water. These two variables are determined by two partial differential equations. The equations are developed in Appendix C.

Equations C-6 and C-7 are combined mass-conservation and Darcy's-law equations; equation C-9 says that between the wetting and nonwetting phases, all available pore space is filled. Equation C-8 states that the capillary pressure is a function of the water and nonwater saturations, and that the water and nonwater pressures contribute to it with opposing signs. This has been experimentally verified.

Together, equations C-6 to C-9 make up two equations in two unknowns.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

Uses --

Equations C-6 to C-9 are used to model oil pollution of aquifers. Solving the equations gives the water saturation in the formation, which can be used as an element in a miscible-flow equation if there are pollutants dissolved in the water.

Data Needs--

A summary of the parameters that need to be determined to specify the model is given in Table 19.

Of all the parameters, q is the most difficult to determine.

References--

The book by Peaceman (1977) contains a complete explanation of the immiscible-flow equations.

TABLE 19. DATA NEEDS FOR IMMISCIBLE-FLOW MODEL

Parameter	How Determined
α (thickness of formation)	Geologic maps and cores
D (depth of formation)	Geologic maps and cores
$P_C(S_w)$ (capillary pressure)	Determined experimentally from cores
$k_{rw}(S_w)$ (relative permeability)	Determined experimentally from cores
$q(\bar{x})$ (source or sink term)	Must identify sources of contamination (fractures, bad wells, etc.), from geologic and hydrologic maps and pressure test cores
ϕ_e (effective porosity)	Determined experimentally from cores

Miscible-Flow Equations

Overview--

The miscible-flow models couple one mass-conservation-Darcy's-law equation with a convection-diffusion equation. The mass-conservation-Darcy's-law equation is used to

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

establish the distribution of groundwater velocity within the aquifer, and the water saturation. These two variables are then used as input to the convection-diffusion equation that models the concentration of pollutant within the groundwater. It is important to realize that the miscible-flow equations assume that water mobility and density are constant -- that is, that increasing concentrations of pollutant do not change these values. This assumption does not hold true for surfactant and polymer pollutants. The equations are developed in Appendix C.

These relations must be empirically determined for the polymers and surfactants under consideration. The result is that equations C-10 (Darcy's Law equation) and C-13 (convection-diffusion equation) must now be solved simultaneously instead of independently. The mobility effects of equations C-14 and C-15 are likely to be important, as the presence of polymer in groundwater will slow its movement through rock. It must be realized that this effect may well be permanent; i.e., groundwater flow after a pollutant event is likely to be slower than before the event, even after polymer levels have subsided. This is because polymer clogs rock pores, decreasing permeability. This is the essence of equation C-14.

Uses --

Equations C-10 to C-13 are used to model brine and biocide pollution of aquifers. With equations C-14 and C-15 added, polymer and surfactant pollutant events may be modeled.

Data Needs--

A summary of the parameters that need to be determined to specify the model are given in Table 20.

References--

The book by Collins (1976) describes the miscible-flow model, including polymer-mobility effects.

Fluid Altering Equations

Where the pollutant is polymer or surfactant, equations C-14 and C-15 must be added to account for changing water mobility and density. Data are obtained from laboratory flooding simulations employing the polymer or surfactant.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

TABLE 20. DATA NEEDS FOR MISCIBLE-FLOW MODEL

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

Parameter	How Determined
<u>Normal Case</u>	
α (thickness)	Geologic maps and cores
D (depth of formation)	Geologic maps and cores
$P_C(S_w)$ (capillary pressure)	Determined experimentally from cores
κ (permeability) 6-1/2" -----	Determined experimentally from cores
μ (viscosity of groundwater)	Water samples
ϕ_e (effective porosity)	Cores
S_w (water saturation)	Hydrologic maps and cores
<u>Polymer and Surfactant Case</u>	
$\kappa(c)$ permeability	Experimentally from cores
$\mu(c)$ (viscosity of ground-water)	Viscometer

BEGIN
LAST LINE
OF TEXT

3/8"

-83-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

SECTION 9

BASELINE DATA ON GROUNDWATER QUALITY

INTRODUCTION

To establish a baseline for the groundwater-quality monitoring of EOR projects, data representative of the areas in which present or future EOR activity is taking place are needed. Rather than raw data, the required information is in the form of regional statistics. Such statistics can be used in the assessment of problems at specific oilfields. The steps in the development of useful regional statistics are as follows:

1. The selection of counties in which groundwater-monitoring data are to be collected.
2. The display, on 1:500,000 scale hydrologic unit maps, of the spatial placement of monitoring stations within each county.
3. The selection of a statistic to estimate the "average" groundwater quality within a particular cluster of stations.
4. The taking out of seasonal and other trends in the selection of a statistic, to produce a residual variance, σ .

A discussion of the procedures to be used in each of these steps follows.

SELECTION OF COUNTIES

From the Oil and Gas Journal EOR Annual Report of March 28, 1980, four counties were selected as representative areas of present or future EOR activity for initial tabulation in this report:

Osage, Oklahoma
Stephens, Texas
Wayne, Mississippi
Kern, California

BEGIN
LAST LINE
OF TEXT

3/8"

-85-

Preceding page blank

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

The USGS National Water Data Exchange (USGS/NWDE) provided a retrieval of the locations and monitoring frequencies of all groundwater monitoring stations in these counties. That information is tabulated in Appendix D.

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

DISPLAY OF SPATIAL PLACEMENT

The USGS can provide printouts that include latitude and longitude, monitoring frequency, and station ID numbers. From this information, the USGS/NWDE can provide plots of the spatial location of the stations within selected counties. This information can be obtained from the USGS in Reston, Virginia.

SELECTION OF A STATISTIC

The "average" water quality from samples taken at irregular spacings and times (as is likely for the data of concern here) is estimated in a geostatistical procedure known as "kriging."

Kriging involves the selection of λ_i 's in an estimator of the form:

$$\bar{\mu} = \sum_{i=1}^N \lambda_i W(X_i, Y_i, t_i),$$

so as to estimate

$$\mu = \frac{1}{AA} \int W(X, Y, t^*) dx dy$$

That is, the average concentration of W over the area A at time t^* .

The characteristics of the kriging estimator are:

1. unbiasedness under the assumption of $W = a$ constant.
2. least variance among linear estimators.

See the David et al. (1976) reference for "hands-on" use.

BEGIN
LAST LINE
OF TEXT

3/8"

-86-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

TREND ANALYSIS

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

Groundwater literature indicates that seasonal trends are a possibility. These trends have been observed on several occasions in nonpolluted groundwater and have increased in severity after a pollutant event; that is, these trends may well be better expressed as a percent change from the average rather than as an additive factor. A trial regression might be:

$$\mu_{ij} = \bar{\mu} + \alpha_j \beta_i + e_{ij},$$

where

μ_{ij} = the kriging estimator in year i , month j .

$\bar{\mu}$ = the average value for concentration

α_j = the month effect

β_i = the year effect

e_{ij} = an additive error term (the literature supports the idea that the term is in fact additive).

9-1/8"

BEGIN
LAST LINE
OF TEXT

3/8"

-87-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

SECTION 10

RECOMMENDATIONS

This report sets up a framework for statistically valid monitoring of enhanced recovery projects. Monitoring conducted in accordance with this framework at geographically separated sites will be comparable for the purposes of evaluating regional and national conditions and trends. However, this report presents only a preliminary outline for groundwater monitoring programs.

The following are recommendations for further work needed regarding the assembly of groundwater quality information for enhanced recovery projects:

- o Identify Projects That Require Monitoring: Review ongoing and planned EOR, EGR, and tar sands projects. Select those projects that are most likely to impose groundwater quality degradation. Rank the remaining projects according to potential groundwater quality impacts. Obtain a complete prioritized listing of EOR, and tar sands projects in order of need for monitoring.
- o Identify Susceptible Regions: Review the regional* distribution of EOR, EGR and tar sands projects. Evaluate the regional environmental issues, existing environmental quality and groundwater use. Prioritize regions regarding the need for monitoring. Organize the prioritized listing of project by region.
- o Select Trend Monitoring Sample: Develop a statistically based sample of projects, based on compartmentalization of the sample by region and by inferred pollution potential.
- o Select Initial Sample: Select a small set of projects for sampling. This initial set of from one to five sites should be selected based on the accessibility of the site, the availability of existing wells to use in the sampling effort, and the anticipated costs of sampling at that site.

*Regions to be defined in terms of oil production areas.

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

- o Develop Sampling Plans for Sample Set: Design site specific sampling plan for the initial set of sites based on the monitoring guidelines presented in this report. These plans should account for the engineering and geological peculiarities, if any, for the selected projects.
- o Develop Cooperative Sampling Procedure: Working with the DOE and the industry, the EPA should develop a workable plan for conducting monitoring at the initial sample of stations and on a nationwide basis.
- o Training: EPA and DOE should jointly develop training programs for federal, state and industry personnel who will be responsible for carrying out the EOR monitoring programs.

In addition to the work recommended for the implementation of a groundwater monitoring program, the following more general activities should be undertaken to complement the topics covered by this report:

- o Water Usage Monitoring: A program needs to be developed to account for the water usage by EOR and EGR projects. This will need to take the form of monthly tabulations of water usage by projects as compared with unallocated water supplies at that locality.
- o Produced Water Disposal Formations: An information base needs to be developed and kept updated regarding the usage of subsurface formations for produced water disposal, and the volumes disposed of at each formation.
- o Monitoring Programs for Related Technologies: Tar Sands, Heavy Oil Mining. The EPA Las Vegas laboratory has developed detailed protocols for the monitoring of wastewater from oil shale projects (Todd et al., 1976, Slawson, 1979). These protocols, together with this report need to be extended to the tar sands and heavy oil mining technology areas.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

REFERENCES

Aggar, M. A., and Langmuir, D. 1971. "Groundwater Pollution Potential of a Landfill Above a Water Table." Groundwater 9(6), pp. 76-94.

Aris, R. 1978. Mathematical Modelling Techniques, Pitman, San Francisco, 191 pp.

American Petroleum Institute. 1961. History of Petroleum Engineering, API Publication, New York, New York.

Bear, J. 1972. "Dynamics of Fluids in Porous Media." Am. Elsevier Pub. Co., New York, 764 p.

Beck, R. and Pierrehumbert, R.T.D. 1976. Design of Stations for Monitoring Water Quality Trends, U.S. EPA, OPE.

Beck, R., Scriven, T.H.; Lindquist, M.; and Shore, R. 1980. Pollution Assessment of Enhanced Oil and Enhanced Gas Recovery Technologies, U.S. EPA, ORD.

Bender, Scott J.; Pinder, G. F.; and Gay, William F. 1977. "A Comparison of Numerical Approximations to the One-Dimensional Convective-Diffusion Equation." Water Resources Program, Princeton University.

Booz, Allen, and Hamilton. 1978. "Development of Environmental Guidelines for EOR and EGR Processes." Office of Environmental Activities, Division of Program Control and Support, Department of Energy.

Braxton, C.; Muller, C.; Post, J.; Stephens, R.; and White, J. 1976. Potential Environmental Consequences of Tertiary Oil Recovery. For U.S. Environmental Protection Agency. Report No. PB-260, 646/5GA, 229 pp.

Bredehoeft, J. D., and Pinder, G. F. 1973. "Mass Transport in Flowing Groundwater." Water Resour. Res. V. 9, No. 1, pp. 194-210.

Chang, H.L. 1978. "Polymer Flooding Technology - Yesterday, Today, and Tomorrow." Journal of Petroleum Technology:1113-1128.

BEGIN
LAST LINE
OF TEXT

3/8"

-91-

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

Collins, R. E. 1976. Flow of Fluids Through Porous Materials, Petroleum Pub. Co., Tulsa.

David, M. et al. 1976. Advanced Geostatics in the Mining Industry. D. Reidel Publishing Company, Boston, Massachusetts.

Donaldson, Erle C. 1978. The Environmental Aspects of Enhanced Oil Recovery. U.S. Department of Energy, Bartlesville Energy Technology Center, internal paper.

Everett, Lorne, G.; Schmidt, K.D.; Tinlin, R.M.; and Todd, D.K. 1976. "Monitoring Groundwater Quality: Methods and Costs." EPA/600/4-76/023, General Electric Co., Santa Barbara, California, TEMPO.

Fryberger, J. S. 1975. "Arkansas Brine Disposal." In Report 5, Monitoring Groundwater Quality: Illustrative Examples, prepared by G.E. TEMPO for the Environmental Protection Agency (in press).

Geraghty, J. J., and Perlmutter, N. M. 1975. "Landfill Leachate Contamination in Milford, Connecticut." In Report 5, Monitoring Groundwater Quality: Illustrative Examples, prepared by G.E. TEMPO for the Environmental Protection Agency (in press).

Geraghty, J. J., and Perlmutter, N. M. 1975. "Plating Waste Contamination in Long Island, New York." In report 5, Monitoring Groundwater Quality: Illustrative Examples, prepared by G.E. TEMPO for the Environmental Protection Agency (in press).

Gogarty, B.W. 1975. Status of Surfactant or Micellar Methods. Society of Petroleum Engineers Paper No. 5559, AIME.

Gray, William G., and Pinder, G. F. 1976. "An Analysis of the Numerical Solution of the Transport Equation." Water Resour. Res. V. 12, No. 3, pp. 547-55.

Gunnerson, Charles G. 1966. "Optimizing Sampling Intervals in Tidal Estuaries," Journal of the Sanitary Engineering Division, Proceedings of the American Society of Civil Engineers 92(SA2;April): pp. 103-125.

Interstate Oil Compact Commission, (IOCC), 1974. Secondary and Tertiary Oil Recovery Processes. Oklahoma City.

Le Grand, H. E. 1972. "Monitoring of Changes in Quality of Groundwater." In Water Quality in a Stressed Environment, ed. by W. A. Pettyjohn, Burgess Pub. Co., pp. 122-29.

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

Lettenmaier, D.P. 1975. Design of Monitoring Systems for Detection of Trends in Steam Quality, Harris Hydraulics Laboratory, Technical Report #39, University of Washington, Seattle.

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

Matalas, Nicholas C. 1967. "Optimum Gauging Station Location," presented at IBM Scientific Symposium on Water and Air Resource Management, October 23-25, 1967.

Meyer, C. F. ed., 1973. Polluted Groundwater: Some Effects, Controls and Monitoring. G.E. TEMPO Report prepared for the Environmental Protection Agency, EPA-600/4-73-0016.

Montgomery, H.A.C. 1974. "The Design of Sampling Programmes for Rivers and Effluents," Water Pollution Control (1974): pp. 77-101.

Moore, S.F. 1971. The Application of Linear Filter Theory to the Design and Improvement of Measurement Systems for Aquatic Environments, Ph.D. Thesis, University of California, Davis, California.

National Academy of Sciences. Summary Report: Drinking Water and Health. For U.S. Environmental Protection Agency, Washington, D.C.

O'Banion, K. Environmental Impact Assessment: Enhanced Oil Recovery by Caustic Flood, Long Beach, California. Lawrence Livermore Laboratory, June 5, 1978.

Peaceman, Donald W. 1977. Fundamentals of Numerical Reservoir Simulation, Elsevier Press.

Pimentel, K.D., Stuermer, D.H., and Moody, M.M. 1979. "Sampling Strategies in Groundwater Transport and Fate Studies for In Situ Oil Shale Retorting, paper in Oil Shale Symposium, U.S. EPA, IERL, EPA-600/9-80-022, pp. 286-302.

Pinder, G. F., and Frind, E. O. 1972. "Application of Galerkin's Procedure to Aquifer Analysis." Water Resources Research, 8(1), pp. 108-20.

Prickett, T. A., and Lonquist, C. G. 1971. Selected Digital Computer Techniques for Groundwater Resource Evaluation. Illinois State Water Survey, Bulletin 55.

Schmidt, K. D. 1975. "Monitoring Groundwater Pollution." Paper presented at the International Conference on Environmental Sensing and Assessment, Las Vegas, Sept. 14-19.

BEGIN
LAST LINE
OF TEXT

3/8"

-93-

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

Schumacher, M.M., editor, 1978. Enhanced Oil Recovery: Secondary and Tertiary Methods. Noyes Data Corporation, New Jersey.

Silvestro, E., and Desmarais, A.M. 1980. Toxicity of Chemical Compounds Used for Enhanced Oil Recovery, U.S. DOE, BETC.

Slawson, G.C., Jr. 1979. Groundwater Quality Monitoring of Western Oil Shale Development. U.S. EPA Interagency Energy-Environment Research and Development. EPA-600/7-79-023.

Slawson, G.C., Jr., and McMillian, L.G. 1979. Groundwater Quality Sampling Approaches for Monitoring Oil Shale Development, paper in Oil Shale Symposium, U.S. EPA IERL, EPA-600/9-80-022, pp. 86-100.

Stollar, P. L., and Roux, P. 1975. "Earth Resistivity Surveys - A Method for Defining Groundwater Contamination." Groundwater 13(2), pp. 145-50.

Tinlin, R. M. 1976. "Monitoring Groundwater Quality: Illustrative Examples." EPA/666/4-76/036, General Electric Co., Santa Barbara, California, Ctr. for Advanced Studies.

Todd, D. K.; Tinlin, R.M.; Schmidt, K.D.; and Everett, L.D. 1976. "Monitoring Groundwater Quality: Monitoring Methodology." EPA/666/4-76/026, General Electric Co., Santa Barbara, California, Ctr. for Advanced Studies.

U.S. Department of Energy. 1978. Environmental Development Plan: Enhanced Gas Recovery FY 1977. Washington, D.C.

U.S. Department of Energy. 1980. "Comparing Energy Technology Alternatives from an Environmental Perspective," working paper.

Yare, B. S. 1975. "The Use of a Specialized Drilling and Groundwater Sampling Technique for Delineation of Hexavalent Chromium Contamination in an Unconfined Aquifer, Southern New Jersey Coastal Plain." Groundwater 13(2), pp. 151-54.

BEGIN
LAST LINE
OF TEXT

3/8"

-94-

PAGE NUMBER

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD.
BEGIN
SECTIONS
HERE

APPENDIX A

WORLD OIL'S 1979-80 GUIDE TO DRILLING, WORKOVER AND COMPLETION FLUIDS¹

Reprinted courtesy of World Oil, June 1979.

6-1/2"

9-1/8"

¹Note: These are generally oilfield fluids, used in conventional as well as enhanced recovery, many of which are common harmless chemicals. This list is included for completeness.

BEGIN
LAST LINE
OF TEXT

3/8"

-95-

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

World Oil's 1979-80 Fluids Guide

Recommended for These Systems										Functioning As:																		
Water-base										Oil-base		Air, Gas, Mud	Alkalinity, pH Control Additive	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighing Materials	Corrosion Inhibitors
Low pH					High pH					Water-in-Oil (Inert)	Oil Mud																	
Fresh Water	Brackish Water	Salt Water	Gyp Treated	Lime Treated	Fresh Water	Low Solids	Water-in-Oil (Inert)	Oil Mud																				



Product Tradename	Description of Material	Fresh Water	Brackish Water	Salt Water	Gyp Treated	Lime Treated	Fresh Water	Low Solids	Water-in-Oil (Inert)	Air, Gas, Mud	Alk. Alinity, pH Control Additive	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighing Materials	Corrosion Inhibitors	Available from:
ACE-SEN	Flocculant and bentonite Extender	X					X	X								P						S					American Mud
ACL ADOFOAM BF-1	Organic metallic compound Brine & freshwater foamer	X	X	X	X	X	X			X							S	P		S	P						CECA Nalco
ADOMALL AEROSOL AD-4	Bactericide-surfactant Surface active agent Oil-soluble fluid-loss additive for brines	X	X	X	X	X	X	X		X	P		P					S			S						Nalco Am. Cyanamid Western
AFROX AIRFOAM AP-50 AIRFOAM B	Foaming agents Freshwater foamer Brine & freshwater foamer	X	X	X						X						P		S				S					Aquasens Acus-Flo Aqua-Flo
AKTAFLO-E AKTAFLO-S	Nonionic emulsifier Nonionic mud surfactant, shale and solids control	X	X		X	X	X	X		X			P								S	P					Baroid
ALCOMER 80	Selective flocculant	X	X	X			X									P											Allied
ALCOMER 90	Selective flocculant of low yield drill solids	X	X	X				X								P											Allied
ALCOMER 100	Clay flocculant	X	X	X	X	X	X	X								P											Allied
ALCOMER 120 ALCOMER 127 ALCOMER 125	Shale inhibitor Sodium polyacrylate Bentonite extender	X	X	X			X	X								S	P			P		S					Allied Allied Allied
ALCOMER 72L ALCPOL ALDACE	Dispersant, thinner Surface active agent Microbicides	X	X	X	X	X	X	X				P	P					S			P	P					Allied Allied Baroid
ALKA-LIG 007 ALUMINUM STEARATE ALWAYS	Causticized lignite Aluminum stearate High specific gravity granular powder (4.7 sq)	X	X	X	X	X	X	X						P	S	S					P				P	S	American Mud Most companies Mason
AM-9 AM-9 GROUT	Chemical grout Mixture of acrylic monomers w/catalysts									X									P								Am. Cyanamid Am. Cyanamid
AMERICAN BAR	Barite	X	X	X	X	X	X	X	X															P			American Mud
AMERICAN GEL AM-TEC	Wyoming bentonite Water base mud corrosion inhib.	X	X	X	X	X	X	X		X							S					P					American Mud Mitschem
AMOCO DRILLAID 402	Wetting agent for shale-sol. gilsonite & asphaltic materials	X	X	X	X	X	X	X						S	S	S				P	P						Amoco
AMOCO DRILLAID 403	Surface active agent diff. pres. sticking	X	X		X	X	X	X						S	P	S					P						Amoco
AMOCO DRILLAID 405	Biodegradable, non-fluorescent oil substitute	X	X	X	X	X	X	X	X					P							S						Amoco
AMOCO DRILLAID 412	Corrosion inhibitor (Filming amine)	X	X	X	X	X	X	X																			Amoco
AMOCO DRILLAID 450 AMOCO DRILLAID SPA	Oxygen scavenger Sodium polyacrylate fluid loss reducer	X	X	X	X	X	X	X									P										Amoco Amoco
AMOCO FLO-TREAT	Gel reducing agent—low solids non-dispersed muds	X	X					X														P	P				Amoco
AMOCO KLA-FREE AMOCO LO-SOL	Organic biopolymer blend Bentonite extender & selective flocculant	X	X	X	X	X	X	X					P			P	S	S	S			P					Amoco Amoco
AMOCO SELECT-FLOC	Selective flocculant of low yield drilled solids	X	X	X				X								P											Amoco
AMPLI-FOAM ANHIB ANTI-FOAM B	Gen. purpose foaming agent Completion fluid inhibitor Foam inhibitor	X	X	X	X	X	X	X		X		P						P									Mitschem Halliburton Completion
ANTIPREX A APC APS-1	Scale inhibitor Nonpolluting lubricant Water external emulsion spacer fluid	X	X	X	X	X	X	X						P	S								P				Allied Chemco Western
APS-2 AQUAGEL AQUARI	Water based spacer fluid Wyoming bentonite Polymeric for clay free fluids	X	X	X	X	X	X	X	X								P					S					Western Baroid Brinadd
AQUA-TEC	Nonionic blend w/organic amine salt									X														P			Mitschem
ARCOBAN ARCOBAR	Higher alcohol compound Barite	X	X	X	X	X	X	X	X				P														Arnold & Clarke Arnold & Clarke
ARCO BLEND	Blended lignosulfonate compound	X	X	X	X	X	X	X					S		P												Arnold & Clarke
ARCOCHROME ARCO CHROME	Chrome lignosulfonate Chrome lignosulfonate	X	X	X	X	X	X	X					S		P	S	S	S	P								Arnold & Clarke Delta Mud
ARCOCHROME MODIFIED ARCOCLAY ARCODET	Ferrocchrome lignosulfonate Sub-bentonite Detergents	X	X	X	X	X	X	X					P		P			S			P						Arnold & Clarke Arnold & Clarke Arnold & Clarke
ARCO DMS, DME ARCO DMS ARCOFIBER	Non ionic surfactants Liquid surfactant Fibrous material	X	X	X	X	X	X	X	X				P		S		S	P	P								Arnold & Clarke Delta Mud Arnold & Clarke

World Oil's 1979-80 Fluids Guide



Product Tradename		Description of Material		Recommended for These Systems										Functioning As:																Available from:						
				Water-base					Oil-base																											
				Low pH			High pH																													
				Fresh Water	Brackish Water	Settled Water	Gyp Treated	Lime Treated																												
																		Alkalinity, pH Control Additives																		
																		Bactericides																		
																		Defoamers																		
																		Emulsifiers																		
																		Lubricants																		
																		Flocculants																		
																		Filtrate Reducers																		
																		Foaming Agents																		
																		Lost Circ. Mat.																		
																		Shale Control Inhib.																		
																		Surface Active Agents																		
																		Thickeners, Dispersants																		
																		Viscosifiers																		
																		Calcium Removers																		
																		Weighting Materials																		
																		Corrosion Inhibitors																		

ARCO FLOC	Flocculating agent																												Arnold & Clarke
ARCO FOS	Sodium tetraphosphate	X	X																										Arnold & Clarke
ARCO FREE	Oil soluble surfactants	X	X		X	X																	P	P					Arnold & Clarke
ARCO GEL	Bentonite	X	X		X	X	X	X																					Arnold & Clarke
ARCOLIG	Mined lignite	X	X		X	X	X	X																					Arnold & Clarke
ARCOLOID	Pregelatinized starch	X	X	X	X	X	X	X																					Arnold & Clarke
ARCOLUBE	Extreme pressure lubricants	X	X	X	X	X	X	X																					Arnold & Clarke
ARCOMERSE	Sodium alkylaryl sulfonate	X	X	X	X	X	X	X																					Arnold & Clarke
ARCOMICA F	Ground mica, fine	X	X	X	X	X	X	X	X	X																			Arnold & Clarke
ARCOMICA C	Ground mica, coarse	X	X	X	X	X	X	X	X	X																			Arnold & Clarke
ARCOMUL	Primary emulsifier for invert muds	X	X	X	X	X	X	X	X	X																			Arnold & Clarke
ARCOPARA	Paraformaldehyde	X	X	X	X			X																					Arnold & Clarke
ARCO PERMALOID	Non-fermenting starch	X	X	X	X	X	X	X																					Arnold & Clarke
ARCO PLUG F M C	Ground Walnut Shells	X	X	X	X	X	X	X	X	X																			Arnold & Clarke
ARCOSEAL	Cellophane	X	X	X	X	X	X	X	X	X																			Arnold & Clarke
ARCOSOL	Non-ionic anionic emulsifier	X	X	X	X	X	X	X																					Arnold & Clarke
ARCOTAN	Quebracho compound	X	X	X	X	X	X	X																					Arnold & Clarke
ARCOTONE	Cauticized lignite	X	X	X	X	X	X	X																					Arnold & Clarke
ARCOTRIM	Blend of surfactants	X	X	X	X	X	X	X																					Arnold & Clarke
ARCOTROL	Stabilizer for oil muds								X	X																			Arnold & Clarke
ARCO VAN	Hi-temperature stabilizer for oil muds								X	X																			Arnold & Clarke
ARCO VIS	Viscosity and gel builder for oil muds								X	X																			Arnold & Clarke
ARCO WATE	Calcium carbonate								X	X																			Arnold & Clarke
ARCOWOOL	Fibrous mineral wool	X	X	X	X	X	X	X																					Arnold & Clarke
ARGISIL 56	Attapulgite clay or sepiolite	X	X	X	X	X	X	X																					S. F. D. S.
ASBENT EXTRA	Crysotyl	X	X	X	X	X	X	X																					UBM
ASBENT XP	Fine Asbestos	X	X	X	X	X	X	X																					Drillate
ASBESTOS LC	Fibrous asbestos	X	X	X	X	X	X	X																					Drillate
ASBESTOS SL	Inorganic viscosifier	X	X	X	X	X	X	X																					Drillate
ASP-222	Corrosion inhibitor	X	X	X	X	X	X	X	X	X																		P	Visco
ASPHA-GEL	Gelatinous casing recovery pads								X	X																			Mizell
ASPHA-MUL	Basic emulsifier								X	X																			Mizell
AT-GEL	Attapulgite	X	X	X	X	X	X	X																					Drillate
ATLOSOL	Anionic-nonionic surfactant, emulsifier	X	X	X	X	X	X	X																				S	Michem
ATLOSOL	Low solids emulsifier	X	X		X	X	X	X																					Aquasess
ATLOSOL S	Low solids brine emulsifier	X	X	X																									Aquasess
ATLOSOL S	Nonionic emulsifier	X	X	X																								S	Michem
ATTAPULGUS DRILLING CLAY 40	Attapulgite Clay for oil mud								X	X																			Engelhard
ATTAPULGUS DRILLING CLAY 150	Attapulgite Clay	X	X	X	X			X																					Engelhard
ATTAPULGUS DRILLING FLUID	Pre-dispersed attapulgite clay liquid	X	X	X	X			X																					Engelhard
BACTIRAM	Bactericide	X	X	X	X	X	X	X																					CECA
BACTIRAM 443	Bactericide (sulfate reducing)	X	X	X	X	X	X	X																					CECA
BACTIRAM 471	Corrosion inhibitor and bactericide	X	X	X																							P		CECA
BACTRON K-22	Bactericide	X	X	X	X	X	X	X																					Champion
BACTRON K-31	Bactericide	X	X	X	X	X	X	X	X	X																			Champion
BACTRON KM-4	Bactericide	X	X	X	X	X	X	X																					Champion
BACTRON KM-5	Bactericide	X	X	X	X	X	X	X	X	X																			Champion
BACTRON KM-7	Bactericide for high wt. brine	X	X	X	X	X	X	X	X	X																			Champion
BANSLUFF	Asphaltic Compound	X	X	X	X	X	X	X																					Drigmud
BARABUF	pH buffer for clay free fluids	X	X	X			X	X			X	P																	Baroid
BARACARB	Acid soluble graded calcium carbonate	X	X	X	X	X	X	X																				P	Baroid
BARACOR A	Corrosion inhibitor	X	X	X	X	X	X	X																				P	Baroid
BARA DEFOAM 1	Surface active defoamer	X	X	X	X	X	X	X																					Baroid
BARAFLOC	Clay flocculant	X	X					X																					Baroid
BARAFOS	Sodium tetraphosphate	X	X					X																					Baroid
BARAVIS	Synthetic cellulose	X	X	X	X	X	X	X																					Baroid
BARAZAN	Suspension agent	X	X	X	X	X	X	X																					Baroid
BAR-GAIN	High specific gravity weighting agent	X	X	X	X	X	X	X	X	X																			Baroid
BARITE	Or barites, offered under many tradenames, native barium sulfate	X	X	X	X	X	X	X	X	X																		P	Most companies
BARITE MUDBAR	Barium sulphate and barite	X	X	X	X	X	X	X	X	X																		P	Edemaards
BARITE MUDHEMA	Barite and hematite	X	X	X	X	X	X	X	X	X																		P	Edemaards
BARIUM CARBONATE	Barium carbonate	X	X	X	X	X	X	X																				P	Most companies

-98-

World Oil's 1979-80 Fluids Guide



Product Tradename		Description of Material		Recommended for These Systems										Functioning As:																Available from																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
				Water-base					Oil-base					Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Scale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighing Materials	Corrosion Inhibitors																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
				Low pH		High pH			Water-in-Oil (Emul.)	Oil Mud	Air, Gas, Mat.																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
				Fresh Water	Brackish Water	Salt Water	Gyp Treated	Lime Treated				Fresh Water	Low Solids																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
BASCO 50	Nonfermenting starch	X	X	X	X	X	X	X	X	X																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															</

World Oil's 1979-80 Fluids Guide

World Oil's 1979-80 Fluids Guide

Product Tradename	Description of Material	Recommended for These Systems										Functioning As:														Available from:																			
		Water-base					Oil-base					Alkalinity, pH Control Additive	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscoelastic	Calcium Removers	Weighing Materials	Corrosion Inhibitors																		
		Low pH		High pH			Low pH		High pH																																				
		Fresh Water	Brackish Water	Salt Water	Gyp Treated	Line Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist																																		
BRINE-GARD	H ₂ S scavenger	X	X	X	X	X	X	X																		P	Brinadd																		
BRINE-OX	Oxygen scavenger	X	X	X	X	X	X	X																		P	Brinadd																		
BRINE-PAC	Corrosion inhibitor for solids free packer fluids		X	X																						P	Milchem																		
BRINE SAVER	Oil-soluble fluid-loss additive for brines	X	X	X	X	X	X											P									Dowell																		
BRINEFOAM	Surfactant										X										P						Brinadd																		
BRISTEX	Pig hair bristles	X	X	X	X	X	X	X	X	X								S		P		S		P			Trinax																		
BRIXEL	Ferrochrome lignosulfonate	X	X	X	X	X	X	X										S									Averbene																		
BRIXEL 2E	Ferro-lignosulfonate modified	X	X	X	X	X	X	X							S		S						P				CECA																		
BRIXEL 3E	Sodium FerroChrome Ligno-sulfonate modified	X	X	X	X	X	X	X										S					P				Averbene & CECA																		
BRIXEL ECO	Ferro-lignosulfonate modified	X	X	X	X	X	X	X							S		S						P				Averbene																		
BRIXEL NF 2	Ferrochrome lignosulfonate	X	X	X	X	X	X	X							S		S				S		P				CECA																		
BUCAL	Shale control reagent	X	X	X	X	X	X	X	X	X										P							Arnold & Clarke																		
BW BAR	Barytes	X	X	X	X	X	X	X										S									BW Mud																		
BW CHROME-FREE	Dechromed lignosulfonate	X	X	X	X	X	X	X															P				BW Mud																		
BW CLAY	Wyoming bentonite	X	X		X	X	X	X							S		S						P				BW Mud																		
BW CLN	Chrome lignite	X	X	X	X	X	X	X							S		S						P				BW Mud																		
BW DT	Concentrated mud detergent	X	X	X	X	X	X	X							S		S										BW Mud																		
BW EMUL	Invert emulsifier								X	X				P													BW Mud																		
BW EMUL-FL	Supplementary emulsifier & filtration control agent for invert emulsions								X	X				S				P									BW Mud																		
BW EMUL-VIS	Gelling agent for invert emulsions								X	X								S						P			BW Mud																		
BW EXH-CELL	Purified, high molecular weight carboxymethyl cellulose	X	X		X	X	X	X										P						P			BW Mud																		
BW FCL	Ferro-Chrome lignosulfonate	X	X	X	X	X	X	X										S					P				BW Mud																		
BW HEC	Hydroxy ethyl cellulose	X	X	X	X	X	X	X										S						P			BW Mud																		
BW HI-CELL	High molecular weight sodium carboxymethyl cellulose	X	X		X	X	X	X										P						P			BW Mud																		
BW HT-LOID	Temperature stable modified starch	X	X	X	X	X	X	X										P									BW Mud																		
BW INHIBITOR 351	Corrosion inhibitor and bactericide	X	X	X	X	X	X	X			X															P	BW Mud																		
BW LO-CELL	Medium molecular weight sodium carboxymethyl cellulose	X	X		X	X	X	X										P						S			BW Mud																		
BW LUBE	Biodegradable lubricant	X	X	X	X	X	X	X									P										BW Mud																		
BW PIPE-LOOSE	Surfactant to be mixed with diesel oil to free stuck pipe	X	X	X	X	X	X	X																			BW Mud																		
BW POLYSEALER	Non-viscosifying fluid loss reducer	X	X	X	X	X	X	X										P									BW Mud																		
BW RESINOIL	Oil soluble resin, fluid loss control agent	X	X	X														P									BW Mud																		
BW RHEOCAP	Polymeric shale encapsulator	X	X	X		X	X														P		S				BW Mud																		
BW RHEOCELL	High molecular weight polyanionic cellulosic polymer	X	X	X	X	X	X	X						S	S		P				S		P				BW Mud																		
BW RHEODRILL	Polymeric viscosifier	X	X	X	X	X	X	X										S						P			BW Mud																		
BW RHEOFLOW	High molecular weight polyanionic cellulosic polymer	X	X	X	X	X	X	X						S	S		P				S		P				BW Mud																		
BW SAFESEAL	Particle sized calcium carbonate	X	X	X	X	X	X	X	X	X								P							S		BW Mud																		
BW SALT CLAY	Attapulgite clay		X	X	X	X	X	X																P			BW Mud																		
BW SCALEFREE	Scale inhibitor	X	X	X	X	X	X	X																		P	BW Mud																		
BW S-LOID	Pregelatinized starch	X	X	X	X	X	X	X										P									BW Mud																		
CALCIUM BROMIDE	Calcium bromide/calcium chloride (liquid blend)	X	X	X	X	X	X	X	X	X										P					P	S	Dents Mud																		
CALCIUM CARBONATE	Calcium carbonate	X	X	X	X	X	X	X	X	X										P					P		Most companies																		
CALCIUM CHLORIDE	Calcium chloride		X	X	X				X	X	X	P						S			P				P		Most companies																		
CALGON X-9	Oxygen scavenger-powdered	X	X	X	X	X	X	X	X	X	X														P		Water Tech																		
CALGON X-10	Powdered inorganic metallic compound	X	X	X	X	X	X	X	X	X	X														P		Water Tech																		
CALGON X-100	Liquid inorganic metallic compound	X	X	X	X	X	X	X	X	X	X														P		Water Tech																		
CALGON X-901T	Oxygen scavenger-liquid	X	X	X	X	X	X	X	X	X	X														P		Water Tech																		
CALGON X-330	Organic inhibitor	X	X	X	X	X	X	X	X	X	X														P		Water Tech																		
CALGON Y-55LT	Liquid salt inhibitor			X																							Water Tech																		
CALGON CAL-95AL	Calcium lignosulfonate gypsum cement	X	X		X	X	X	X										S		P		S	P		P		CDA HMC Halliburton																		



World Oil's 1979-80 Fluids Guide



Product Tradename		Description of Material		Recommended for These Systems										Functioning As:														Available from
				Water-base					Oil-base		Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thinner, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials	Corrosion Inhibitors		
				Low pH			High pH		Water in Oil (Invert)	Oil Mud																		
				Fresh Water	Brackish Water	Salt Water	Gyp Treated	Lime Treated																			Fresh Water	
CALTROL	Shale control inhibitor																										Michem	
CANAFLEX	Shredded cane fibers																										UBM	
CARBOCEL	CMC																										Lambert	
CARBO-FREE	Variable density oil phase spotting fluid concentrate to free stuck pipe																										Michem	
CARBO-GEL	Invert suspending agent, viscosifier																										Michem	
CARBO-MUL	Liquid oil phase mud emulsifier and wetting agent																										Michem	
CARBONOX	Lignitic material																										Baroid	
CARBO-SEAL	Modified hydrocarbon																										Michem	
CARBOSE	Sodium carboxymethyl cellulose																										BASF Wyandotte	
CARBO-TEC L	High temp. w/o emulsifier for oil phase muds																										Michem	
CARBO-TROL	Filtration control agent for oil phase muds																										Michem	
CARBOX S	Carboxylic polycarbonate dispersant																										Drillate	
CARBWATE	Calcium carbonate (particle sized) for clay free fluids																										Brinadd	
CARNA-MUL	Supplemental additive for oil muds while drilling carnalite salt																										Mizell	
CASCANIT	Processed nut hulls																										UBM	
CAUSTICIZED LIGNITE	North Dakota lignite (causticized)																										Wyo-Ben	
CAUSTIC POTASH	Potassium hydrate																										Most companies	
CAUSTIC SODA	Sodium hydroxide																										Most companies	
CAUSTI-LIG	Causticized lignite																										Magco-bar	
CC-16	Sodium salt of lignitic material																										Baroid	
CEASCAL	Acid soluble sealer for lost circulation																										Magco-bar	
CEASTOP	Acid soluble lost circulation material																										Magco-bar	
CECA D.D.	Drilling mud detergent																										CECA SA	
CECA DETERGENT	Drilling mud detergent																										CECA	
CECABAR	Berite																										CECA	
CECAL	Ground almond hulls																										CECA	
CECALIG	Chrome lignosulfonate																										CECA	
CECAMIANTE	Inorganic viscosifier																										CECA	
CECAMIDON	Pregelatinized starch																										CECA	
CECAPERL	Expanded perlite																										CECA	
CECARB	Calcium carbonate																										CECA	
CECBRINE A	Acid soluble workover																										CECA	
CECBRINE B	Acid soluble filtrate reducer for cecbrine A																										CECA	
CECFLOC	Clay flocculant																										CECA	
CECFLOC HT	Clay flocculant-high temp.																										CECA	
CECGUM	Natural polymer																										CECA	
CECLUB EP	Extreme pressure lubricant																										CECA	
CECMER	Carboxymethyl cellulose																										CECA	
CECNUT	Ground walnut hulls (fine and coarse)																										CECA	
CECOL	Ground olive stones (fine and coarse)																										CECA	
CECPAQ	Combination of granules, and fibers																										CECA	
CECPAQ S	Fine Coarse Acid soluble lost circulation material																										CECA	
CECPHANE	Shredded cellophane																										CECA	
CECTAN	Atomized quebracho																										CECA	
CECWOOD	Shredded wood fiber																										CECA	
CEDAR SEAL	Processed cedar fiber																										Most companies	
CEGAL	Lead sulfide powder																										CECA	
CELATLEX	Ground rubber (fine, medium and coarse)																										CECA	
CELATLEX N	Ground neoprene (fine, medium & coarse)																										CECA SA	
CELLFLAKE	Fibrous cellulose																										Drillate	
CELLEX	Sodium carboxymethyl cellulose																										Baroid	
CELLOFLAKE	Shredded cellophane																										Drillate and ECCO	
CELL-O-SEAL	Shredded cellophane																										Magco-bar	
CELL-O-SEAL	Cellophane flakes																										Western	

World Oil's 1979-80 Fluids Guide

World Oil's 1979-80 Fluids Guide

Product Tradename	Description of Material	Recommended for These Systems										Functioning As:													Available from:																				
		Water-base					Oil-base					Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thinner, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials	Corrosion Inhibitors																		
		Low pH		High pH			Water-in-Oil (invert)		Oil Mud																																				
		Fresh Water	Brackish Water	Salt Water	Gyp Treated	Lime Treated	Fresh Water	Low Solids	Water-in-Oil (invert)	Oil Mud	Air, Gas, Mist																																		
CELLOSIZ CELOFLEX CELPOL	Hydroxyethyl cellulose Shredded cellophane Long chain polyanionic cellu- losic polymer	X	X	X	X	X	X	X			X				S	S	P		P	P				P			Magcober USM Nyma																		
CELPOL SL CF-1 CF-2	Polyanionic cellulose polymer Anionic foaming agent Neutral fluorohydrocarbon foamer	X	X	X	X	X	X	X						S	S		P		P	P		P					Nyma Cardinal Cardinal																		
CHALKSEAL CHALK-SEAL	Acid soluble fibers Select blend of acidizable lost circulation materials	X	X	X	X	X	X	X	X		X								P	P							Drigmud Mizell																		
CHEMCO APC MUD LUBI	Non-polluting lubricant	X	X	X	X	X	X	X							P		S										Chemco																		
CHEMCOBAR CHEMCO FREE LUBE	Barite Surfactant material to be mixed with diesel oil to free stuck pipe	X	X	X	X	X	X	X	X	X				P											P		Chemco Chemco																		
CHEMCO GEL	Wyoming bentonite	X	X		X	X	X	X									S						P				Chemco																		
CHEMCO LDD CHEMCO LIG CHEMCO LIGNO- SULFONATE 727	Fluid detergent Lignite Lignosulfonate	X	X	X	X	X	X	X	X					P	S		P				P	P					Chemco Chemco Chemco																		
CHEMCO NO FOAM CHEMCO NO SLUFF CHEMCO PLUG	Liquid antifoam agent Sulfonated asphalt Ground nut hulls	X	X	X	X	X	X	X	X				P	S	S		P		S	P							Chemco Chemco Chemco																		
CHEMCO SALT GEL CHEMHIB 80 CHEMICAL V	Attapulgite clay Fining amine Non-viscous organic liq. to im- prove gel and combat crude oil contamination in Black Magic		X	X					X	X	X			S		S		S		S	P				P		Chemco Binnadd Oil Base																		
CHEMICAL W	Non-viscous organic liq. and Black Magic thickening agent							X	X	X							S	S	S		S	P					Oil Base																		
CHEMICAL WASH 7 CHEMICAL WASH 100	Mud preflush for cementing Mud preflush for cementing	X	X	X	X	X	X	X			X						S				P						Dowell Dowell																		
CHEMTROL X CHIP-SEAL CHROMBLEND	Selected polymer blend Shredded Cedar Fiber Blend of dispersant	X	X	X	X	X	X	X									P	P	S								Mitchem Magcober Arnold & Clarke																		
CHROME-FREE CHROMELIG CIB	Chrome free lignite for high temperature service Chrome lignite Fining amine	X	X	X	X	X	X	X					P				S		P	P							T.I.M. Arnold & Clarke Texas Brine																		
CIDE-COR CIRCOTEX CIRCOTEX-MAX	Biocide-corrosion inhibitor Sized carbonates Sized carbonates	X	X	X	X	X	X	X	X	X		P							P						S	P	Messina Texas Brine Texas Brine																		
CKCIDE L CKCIDE P CKCL	Non-polluting bactericide (liquid) Non-polluting bactericide (powder) Inhibitive complex polymer	X	X	X	X	X	X	X				P					S	S		P							CECA CECA CECA																		
CKMIX	Oil-in-water emulsion workover and completion system							X						S		S							P				CECA SA																		
CL 11 CLAR O CEL CLARSOL ATC	Potassium salt of lignite material Cellulose fiber Attapulgite clay	X	X	X	X	X	X	X									P		P		S						Avabene CECA CECA																		
CLARSOL FB 2 CLARSOL FB 5 CLARSOL FB 7	Medium yield bentonite High yield bentonite Sepiolite clay	X	X	X	X	X	X	X			X						S					P		P			CECA CECA CECA																		
CLARSOL THR CLARSOL WY CLA-STAY	Super-bentonite Wyoming bentonite Completion & perforating fluid	X	X	X	X	X	X	X			X						S		S			P		P			CECA CECA Halliburton																		
CLAY-EX CLAY MASTER CLAY STABILIZER L42	Bentonite extender Low M.W. polymer Zirconium salt solution to prevent clay migration	X	X	X	X	X	X	X			X						P			P							Arnold & Clarke Western Dowell																		
CL-CLS CL-CLS CLEAR S20	Chrome lignite-chrome lignosulfonate Chrome lignite-chrome lignosulfonate Surfactant for removal of oil mud lost to formation	X	X	X	X	X	X	X						S		P		S		S	P						Dixie Delta Mud Baroid																		
CLEARATRON 7 CLEARATRON B-24 CLINTON FLAKES	Flocculant Flocculant sulfide scavenger Shredded cellophane	X	X	X	X	X	X	X			X				P				P								Champion Champion Dowell																		
C-LOX CLS	Liquid oxygen scavenger Chrome lignosulfonate	X	X	X	X	X	X	X						S		P		S		S	P						Wyo-Ben Most companies																		

-102-



World Oil's 1979-80 Fluids Guide



World Oil's 1979-80 Fluids Guide

		Recommended for These Systems										Functioning As:														Available from:																	
		Water-base					Oil-base					Alkalinity, pH Control Additive	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thinners, Dispersants	Viscosifiers	Calcium Removers	Weighing Materials																	
		Low pH			High pH		Water-in-Oil (Invert)		Oil Mud																																		
Product Tradename	Description of Material	Fresh Water	Brackish Water	Salt Water	Gyp Treated	Line Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist																																
CMC	Sodium carboxymethyl cellulose (offered under many tradenames and in many grades)	X	X		X	X	X	X										P						S			Most companies																
CMHEC	Dry or liquid viscosifier & filter reducer for salt muds and cement slurries	X	X	X	X	X	X	X			X			S				P						S			Drillsafe																
CM-TH COAT-45	Cement decontaminant Sulfide scavenger	X	X	X		X	X	X				P													P		Brinadd Baroid																
COAT-110 COAT-113 COAT-122	Atmospheric corrosion inhibitor Oxygen corrosion inhibitor Corrosion inhibitor for treating solids free packer fluids	X	X	X	X	X	X	X			X															P	Baroid Baroid Baroid																
COAT-190 COAT-311 COAT-415	Atmospheric corrosion inhibitor Oxygen corrosion inhibitor Filmforming amine	X	X	X	X	X	X	X			X															P	Baroid Baroid Baroid																
COAT-777 COAT-888 COAT B-1400	Oxygen scavenger (liquid) Oxygen scavenger (solid) Corrosion inhibitor and biocide for treating solids free packer fluids	X	X	X	X	X	X	X								S										P	Baroid Baroid Baroid																
COLMACEL COMP-PLUG	Cellulose fiber Acid soluble particulate suspension	X	X	X	X	X	X	X	X	X									P								CECA Completion																
CON DET	Mud detergent							X						S								P					Baroid																
CORBAN COREXIT 7648	Organic corrosion inhibitors Inorganic scale dissolver	X	X	X				X																		P	Dowell Exxon Chem.																
COREXIT 7652 COREXIT 7671	Anionic surfactant blend Bactericide, concentrated sodium trichlorophenate solution	X	X	X	X	X	X	X	X	X			P		P							P					Exxon Chem. Exxon Chem.																
COREXIT 7720	Corrosion inhibitor	X	X	X	X	X	X	X	X	X																P	Exxon Chem.																
COREXIT 7754 COREXIT 7767 COREXIT 7815	Corrosion inhibitor Inorganic oxygen scavenger Paraffin dispersant	X	X	X	X	X	X	X	X	X						P										P	Exxon Chem. Exxon Chem. Exxon Chem.																
CORTRON R-174 CORTRON R-2207 CORTRON R-2264	Organic corrosion inhibitor Organic corrosion inhibitor Complete brine packer fluid treatment	X	X	X	X	X	X	X	X	X																P	Champion Champion Champion																
CORTRON RDF-18	Corrosion inhibitor for mud	X	X	X	X	X	X	X	X	X																P	Champion																
CORTRON RDF-21 CORTRON RDF-100	Filmforming amine corr. inh. Catalyzed powdered oxygen scavenger	X	X	X	X	X	X	X	X	X																P	Champion Champion																
CORTRON RDF-101	Oxygen scavenger	X	X	X	X	X	X	X																		P	Champion																
CORTRON RDF-109 CORTRON RDF-115 CORTRON RDF-126	Organic filmforming inhibitor Corrosion inhibitor Oxygen scavenger	X	X	X	X	X	X	X	X	X																P	Champion Champion Champion																
CORTRON RDF-132 CORTRON RDF-137	Aerated corrosion inhibitor Sulfide scavenger corrosion inhibitor	X	X	X	X	X	X	X	X	X																P	Champion Champion																
CORTRON RDF-138	Corrosion inhibitor for aerated muds	X	X	X	X	X	X	X		X																P	Champion																
CORTRON RU-70 CORTRON RU-135 CORTRON RU-137	Complete mud packer fluid Aerated corrosion inhibitor Low solids corrosion inhibitor	X			X	X																				P	Champion Champion Champion																
COTTONSEED HULLS COUOFLEX CRACKCHEK-97	Cottonseed hulls Shredded leather flakes Sulfide cracking inhibitor	X	X	X	X	X	X	X	X	X									P							P	Most companies UBM Halliburton																
CRODACAP CRODACELL CRODAN	Encapsulating polymer Viscosifying polymer Sodium polyacrylate	X	X	X	X		X	X			X							P							S		CDA/HMC CDA/HMC CDA/HMC																
CRODAPOL 15 CRONOX-235 CS-1	Polyacrylamide dispersion Drilling corrosion inhibitor Polymer clay stabilizer	X	X	X			X	X			X									P						P	CDA/HMC Aqueous Cardinal																
CS-3 CSD-50	Clay and silt suspending agent One sack additive spotting fluid for freeing stuck pipe	X	X	X			X			X	X									P				S			Western Mizell																
CSD-50 SPACER	One sack cement spacer									X	X																	Mizell															
CUTTINGS WASH CYANAMER 244 A CYANAMER 292	Detergent Drilling fluid additive Low solids mud additive	X	X	X	X	X	X	X	X	X									P							P	Am. Cyanamid Am. Cyanamid Am. Cyanamid																
CYFLOC CYFLOC 4000 CYFLOC 4500	Synthetic flocculant Flocculant Flocculant	X	X	X	X	X	X	X										P							S		Am. Cyanamid Am. Cyanamid Am. Cyanamid																
CYPAN	Sodium polyacrylate	X	X		X	X	X			X								S	P								Am. Cyanamid and ECCO																
D-AIR-1	Powdered antifoam agent																										Halliburton																

-103- P

World Oil's 1979-80 Fluids Guide



Product Tradename		Description of Material		Recommended for These Systems										Functioning As:														Available from
				Water-base					Oil-base																			
				Low pH			High pH																					
				Fresh Water	Brackish Water	Sat. Salt Water	Gyp Treated	Lime Treated						Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist	Alk. Altnity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	
D-AIR-2	Liquid antifoam agent																											Halliburton
DAKOLITE	North Dakota lignite	X	X				X	X	X																			Wyo-Ben
O-D	Drilling mud detergent	X	X	X	X	X	X	X	X																			Magcobar
DEFOAM	Clay free fluids defoamer																											Brinadd
DEFOAMER	Liquid-non alcohol base defoamer																											RDSI
DEFOAMER NO. 15	Higher alcohol compound	X					X	X	X	X	X																	Tenite
DEFOAMER NO. 20	Sodium alkyl aryl sulfonate		X	X	X	X	X	X	X	X	X																	Tenite
DEFOAMER RL23	General purpose defoamer	X	X	X	X	X	X	X	X	X	X																	CDA/HMC
DEFOAMER RL53	Sodium alkyl aryl sulfonate						X	X	X	X	X																	CDA/HMC
DEFOAMER RL83	Branched higher alcohol						X	X	X	X	X																	CDA/HMC
DEFOAMER VDF-135	Defoamer	X	X	X	X	X	X	X	X	X	X		X															Champion
DEFOMEX	Defoamer																											Lamberti
DEL-BAR	Barite (barytes)	X	X	X	X	X	X	X	X	X	X																	Delta Mud
DEL-BRIDGE-B	Blended CaCO ₃ for brine fluids	X	X	X														S		P					P			Delta Mud
DEL-CIDE-B	Film forming amine and bactericide	X	X	X	X	X	X	X	X	X					P												P	Delta Mud
DEL-DEFOAMER	Alcohol defoamer	X	X	X	X	X	X	X	X	X					P													Delta Mud
DEL-DET	Mud detergent	X	X	X	X	X	X	X	X	X					S								P					Delta Mud
DEL-FIBER	Shredded cane fiber blend	X	X	X	X	X	X	X	X	X												P						Delta Mud
DEL-FLAKES	Shredded cellophane	X	X	X	X	X	X	X	X	X												P						Delta Mud
DEL-GEL	Wyoming bentonite	X	X	X	X	X	X	X	X	X								S					P					Delta Mud
DEL-HYVIS-B	Blended HEC for brine fluids	X	X	X																								Delta Mud
DEL-LIGNITE C	Chrome lignite	X	X	X			X	X	X									S		P	S			P		P		Delta Mud
DEL-PAK	Calcium bromide/calcium chloride (liquid blend)																								P	S		Delta Mud
DEL-PEL	Calcium chloride (pellet or flakes)								X	X	X											P				P	S	Delta Mud
DEL-PILL-B	Hec-lignosulfonate-CaCO ₃ slurry blend for brine fluids	X	X	X														S		P								Delta Mud
DEL-PLUG	Ground walnut or pecan hulls	X	X	X	X	X	X	X	X	X	X										P							Delta Mud
DEL-SEAL-B	HEC-lignosulfonate-carbonate blend for brine fluids	X	X	X														P					S					Delta Mud
DEL-S-GEL	Attapulgite clay		X	X				X																P				Delta Mud
DEL-VIS-B	Blended HEC CaCO ₃ for brine fluids	X	X	X														S						P		P		Delta Mud
DESCO	Organic mud thinner	X	X	X	X	X	X	X	X	X					S						S		P					Drill Spec. and ECCO
DESILTA	Selective flocculant	X	X	X				X											P									American Mud
DETERGENT JD-1	Mud detergent	X	X	X	X	X	X	X	X	X					S						P							UBM
DETERGENT #7	Drilling detergent (dry)	X	X	X	X	X	X	X	X	X											P							Wyo. Ben
DETERGENT #139	Organic polymer	X	X	X	X		X	X			X										P	P				S		King
DEXTRID		X	X	X	X		X	X																		S		Baroid
DFM	Polysaccharide defoamer	X	X	X											P													Texas Brine
DICASORB	Shredded oil absorbing material							X	X																			Delta Mud
DIAPLUG	Filter aid material	X	X	X	X	X	X	X	X	X	X										P							Messina
DIASEAL M	Mixture of filter aid materials	X	X	X	X	X	X	X	X	X	X																	Drill. Spec.
DICKS MUD SEAL	Shredded organic fiber	X	X	X	X	X	X	X	X	X	X										P							Wyo-Ben and ECCO
DI-EARTH	Diaceous earth-graded	X	X	X	X	X	X	X	X	X	X		X	X							P							CDA/HMC
DIPEL 421	Polymer for calcium control	X					X	X																		P		Am. Colloid
DISPERSOL C	Modified lignosulfonate	X	X	X																				P				Avebene & CECA
DISPERSOL N	Modified lignosulfonate	X	X	X	X	X																						Avebene & CECA
DMA LIGNITE C	Causticized lignite	X	X				X	X	X						S			P								S		Drill. Add.
DML-2	Water soluble biodegradable non-polluting lubricant	X	X	X	X	X	X	X	X							P												Delta Mud
DMS	Drilling mud surfactant	X	X	X	X	X	X	X	X									S		S			P					Aquasess
DMS	Drill mud surfactant	X	X	X	X	X	X	X	X										S		S			P				RDSI
DOS-3	Diesel oil substitute	X	X	X	X	X	X	X	X																			Magcobar
DOS-22	Drilling mud lubricant	X	X	X	X	X	X	X	X						P							S						Drigmud
DOW CORNING	Silicones	X	X				X																					Tretolite
DOWELL BACTERICIDE 400	Bactericide surfactant	X	X				X	X	X		X	P											S					Dowell
DOWELL BACTERICIDE 500	Bactericide	X	X				X	X	X	X		X	P															Dowell
DOC	Diesel oil cement																				P							Halliburton
DRILLBAR	Barite	X	X	X	X	X	X	X	X	X	X																	Drillsafe
DRILLBAR C	Coarse barite	X	X	X	X	X	X	X	X	X	X															P		Drillsafe
DRILLGEL	Bentonite	X	X	X	X	X	X	X	X	X																		Drillsafe
DRILLING DETERGENT	Drilling mud detergent	X	X	X	X	X	X	X	X	X																		CDA/HMC
DRILLING DETERGENT	Mud detergent	X	X	X	X	X	X	X	X	X																		Drillsafe
DRILLWATE	Acid soluble weighting mat.	X	X	X	X	X	X				X	X															P	CDA/HMC
DRILL-X	Torque reducer (liquid)	X	X	X	X	X	X	X																				Wyo-Ben
DRILL-SOL	Flocculant (liquid)	X	X	X	X	X	X	X																				Wyo-Ben
DRILTAL 131	Drilling mud detergent	X	X	X	X	X	X	X																				Lamberti

-104-

World Oil's 1979-80 Fluids Guide



World Oil's 1979-80 Fluids Guide		Recommended for These Systems										Functioning As:													Available from			
		Water-base					Oil-base																					
		Low pH				High pH	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist	Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thinner, Dispersants	Viscosifiers		Calcium Removers	Weighing Materials	Corrosion Inhibitors
		Fresh Water	Brackish Water	Sat. Salt Water	Gyp Treated	Lime Treated																						
Product Tradename	Description of Material	Fresh Water	Brackish Water	Sat. Salt Water	Gyp Treated	Lime Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist	Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thinner, Dispersants	Viscosifiers	Calcium Removers	Weighing Materials	Corrosion Inhibitors	Available from
DRILTEX	Polymer & sized carbonate blend	X	X	X			X												P						S		Texas Brine	
DRILTREAT DRILTRON B-24	Oil mud stabilizer Flocculant/sulfide scavenger	X	X	X	X	X	X	X	X	X				P				P	S			S	S				Baroid Champion	
DRILTRON B-27 DRILTRON B-143 DRISCOSE	Chromate corrosion inhibitor Sulfide scavenger inhibitor Pure grade CMC	X	X	X			X	X	X	X		X					S	S	P		S			S		P	Champion Champion Drill. Spec	
DRISCOSE HIGH VISCOSITY DRISCOSE, REG. & HV DRISPAC, REG. SUPERLO	Pure grade CMC CMC Polyanionic cellulose	X	X		X	X	X	X	X		X				S	S		P			S			S			Baker Chem. ECCO ECCO	
DRISPAC DRISPAC SUPERLO DRLGBAR	Polyanionic cellulose Polyanionic cellulose Barite	X	X	X	X	X	X	X	X		X			S	S		P		P		P					P	Drill. Spec. Drill. Spec. Drigmud	
DRLGDET DRLGEL DRLGX	Drilling mud detergent Bentonite Polymer flocculant-clay extender	X	X	X	X	X	X	X					S					P		S		P		P			Drigmud Drigmud Drigmud	
DS 403	Corrosion inhibitor for clayfree & water base mud and CO ₂ , H ₂ S	X	X	X	X	X	X	X																		P	Drillsafe	
DS 495	Corrosion inhibitor for workover & completion	X	X	X	X	X	X	X																			P	Drillsafe
DS 495 E	Filming amine w/biocide	X	X	X	X	X	X	X				P															P	Drillsafe
DS P5 DS-PEC DS-PH	H ₂ S scavenger Scale control agent Liquid pH regulator for H ₂ S and shale control	X	X	X	X	X	X	X											S		P	S					P	Drillsafe Drillsafe Drillsafe
DS-PRESERVATIVE D-TRON S-18 DUOVIS	For starch and gums Drilling detergent Xanthum gum biopolymer	X	X	X	X	X	X	X			X	P			S							P		P			S	Drillsafe Champion Magcober
DURATONE HT DURANEX	Oil mud filtration control agent Temperature stable fluid loss additive	X	X	X	X	X	X		X	X									P	P							Baroid Baroid	
DV-22	Fluid loss control agent for oil base and invert emulsion muds								X	X				S				P									Magcober	
DWA-76B DV-33	Dispersant/wetting agent Oil wetting agent for oil continuous & invert emulsion muds								X	X				P					S			S		P			UBM Magcober	
DWA-76	Dispersant/wetting agent								X	X														P			Mizell	
ECCO-BANOX ECCO-BAR ECCO-CLAYLUBE	Oxygen scavenger Barite Biodegradable & Nontoxic lubricant	X	X	X	X	X	X	X	X	X		X														P	ECCO ECCO ECCO	
ECCO-DEFOAMER ECCO-DRILLING DETERGENT ECCO-FILMINE	All purpose defoamer Drilling mud detergent Filming amine	X	X	X	X	X	X	X			X		P		S							S					ECCO ECCO ECCO	
ECCO-GEL ECCO-PARACIDE ECCO-SEAL	Sodium bentonite Microbiocide Shredded organic fiber	X	X	X	X	X	X	X	X	X			P					S					P				ECCO ECCO ECCO	
ECCO-SORBIDE ECCO-SPERSE ECCO-SPOTFREE	H ₂ S scavenger Chrome lignosulfonate Surfactant for mixing w/diesel oil to free stuck pipe	X	X	X	X	X	X	X	X	X					S			P					P				ECCO ECCO ECCO	
ECCO-YP ECCO-SHALEBOND ECONOMAGIC	Bentonite extender Modified asphaltic powder Crude oil emulsifier and thixotropic property adjuster	X	X	X	X	X	X	X	X	X		X			S	P	S		P	S	S	S	S	S		S	ECCO ECCO Oil Base	
EMULFOR BH EMULFOR EP EMULFOR ER EMULFOR GE	Organic compound Emulsifier, stabilizer Filtrate reducer Gelling agent								X	X				P								P		P			CECA CECA CECA CECA	
EMULFOR MO EMULFOR NK EMULFOR ST	Wetting agent for high complex salt content Basic material, filtrate reducer Stabilizer, emulsifier								X	X					P				P			S	S	P		S	CECA CECA CECA	
EMULFOR TX EMULGO EMULGO PILL	Viscosifier Emulsifier for clay free fluids Clay free fluids emulsifier								X	X								S	P					P	P	P	CECA Brinadd Brinadd	
E P MUDLUPE ESAPAL KT 177 ESAPAL NP 187	Extreme pressure lubricant Drill mud liquid surfactant Nontoxic emulsifier	X	X	X	X	X	X	X	X	X					P			S	S			S	P	S			Baroid Lamberti Lamberti	
EW-20	Supplemental emulsifier								X	X																	Mizell	

World Oil's 1979-80 Fluids Guide

Product Tradename		Description of Material		Recommended for These Systems										Functioning As:															Available from	
				Water-base					Oil-base					Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Scale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials		Corrosion Inhibitors
				Low pH			High pH		Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist																		
				Fresh Water	Brackish Water	Salt Water	Gyp Treated	Line Treated					Fresh Water																	
EXCELLO-GEL	Polymeric water gel spacer fluid	X	X	X	X	X	X	X																					Western	
EXTRA HI YIELD GEL	Polymerized Wyoming bentonite	X		X	X	X	X																						Wyo-Ben	
EZEFLO E Z MUL E Z OUT	Low pour-point surfactant Oil mud emulsifier Oil soluble surfactant to free stuck pipe	X	X	X							X	X			P							P	S						Dowell Baroid Delta Mud	
EZ SPOT F-552 FB 1	Oil mud concentrate Nonionic foaming agent Silicone defoamer	X	X	X	X	X	X	X	X	X	X	X				P		S					S						Baroid CE-Natco Delta Mud	
FB 2	Concentrated silicone defoamer	X	X	X	X	X	X	X							P		S												Delta Mud	
FCL F.D.S. 69	Modified chrome lignosulfonate Drilling detergent	X	X	X	X	X	X	X	X	X	X	X				S	P			P		S		P					CDA/HMC Trinity Mud	
FER-O-BAR FERRO-CAL FERROWATE	Weighting material Iron complexed lignosulfonate Iron carbonate	X	X	X	X	X	X	X	X	X	X	X							S				P			P	S		Sachtelien Michem Brinadd	
F.FLOW FIBERTEX FL-1 (Refined)	Mud removal agent Shredded cane fiber blend Improved organic polymer	X	X	X	X	X	X	X	X		X	X						S		P		P							Western Baroid Montello	
FL-3 FL-4 FLOBEST	Polymeric for clay free fluids Polymeric for clay free fluids Inorganic viscosifier	X	X	X															P										Brinadd Brinadd Messina	
FLOCCULENT FLOCELE FLOGEL	Clay flocculant Cellulose flakes Pregelatinized starch	X	X	X	X	X	X	X		X								P											Wyo-Ben Halliburton Scholten	
FLOGEL HV/TA FLOGEL LV FLOGEL LV-NR	Modified natural polymer Pregelatinized potato starch Pregelatinized starch, low viscosity	X	X	X	X	X	X	X	X	X								P					P			P	S		Scholten Scholten Scholten	
FLOGEL NLV FLOGEL ST FLOGEL W	Pregelatinized corn starch Shredded high swelling flakes Carboxymethyl polymer bentonite extender	X	X	X	X	X	X	X	X	X	X	X						P				S							Scholten Scholten Scholten	
FLOCHEK FLOSAL	Two-phase polymer and cement Inorganic viscosifier	X	X	X	X	X	X	X												P		S							Halliburton Drill. Spec. and ECCO Texas Brine	
FLOTIX	Lignosulfonates, carbohydrates & sized carbonate blend	X	X	X			X											P			S									
FLOXIT FOAMATRON V-12 FOAMATRON V-14	Clay flocculant Foaming agent Foaming agent	X	X	X	X	X	X	X		X								P											Megco Champion Champion	
FOAM BRAKE FOAMER DP14 FOAMER DP15	Liquid antifoam agent Non-ionic foaming agent Foaming agent for high electrolyte fluids	X	X	X	X	X	X	X	X						P					P									Montello CDA/HMC CDA/HMC	
FOAMEX PP FOAM FREE	Foaming agent Versatile non-polluting defoamer	X	X	X	X	X	X	X		X						S			P			S							Lambert Messina	
FOAMING AGENT G-2 FORAGUM C FORAGUM HM	Nonionic foaming agent Organic compound Natural polymer	X	X	X					X		X										P								Dowell CECA CECA	
FORAMOUSSE D FORAMOUSSE FW FORAMOUSSE S	Freshwater foaming agent Fresh and sea water foaming agent Salt water foaming agent										X								P										CECA CECA CECA	
FORAQUITAINE 10 FORAQUITAINE 35 FORMASEAL	Bactericide Bactericide Oil sol. lost circ. material and temp. plugging agent	X	X	X	X	X	X	X	X				P									S		P			S		CECA CECA Oil Base	
FORMASEAL-HT	Oil sol. lost circ. material and temp. plugging agent for high temp.							X	X	X								S		P			S						Oil Base	
FREE HOLE	Surface active agent for freeing stuck drill pipe	X	X	X	X	X	X	X	X																				Montello	
FREE LUBE	Surfactant material to be mixed with diesel oil to free stuck pipe	X	X	X	X	X	X	X	X						P														Chemco	
FRACSEAL FRESH-FLO FS-F	Finely ground CaCO ₃ Modified tree extract Low surface tension foaming agent	X	X	X			X	X	X							S			S		P		S		P				Drigmud Messina Western	
F & W PILL	Oil soluble "temporary" plugging agent for producing zones	X	X	X	X	X	X	X	X	X											P								Oil Base	



World Oil's 1979-80 Fluids Guide

World Oil's 1979-80 Fluids Guide

		Recommended for These Systems										Functioning As:													Available from																				
		Water-base					Oil-base					Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filter Aids/Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials	Corrosion Inhibitors																		
		Low pH			High pH		Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist																																			
Product Tradename	Description of Material	Fresh Water	Brackish Water	Salt Water	Gyp Treated	Lime Treated																																							
GABROSA	Sodium carboxymethylcellulose (Low, Med. Hi. Ext Hi vis technical grade)	X	X	X	X	X	X	X		X					S			P		S			P				Montedison																		
GALACTASOL 413	Nonionic polymer viscosifier	X	X	X			X	X		X										S			P				Henkel																		
GALACTASOL 418	Nonionic polymer viscosifier	X	X	X			X	X		X																	Henkel																		
GALACTASOL 615	Anionic polymer viscosifier	X	X	X			X																				Henkel																		
GALENA	Lead sulfide powder	X	X	X	X	X	X		X	X										S			P			P	Baroid																		
GEL-AIR	Anionic foaming agent									X									P			S		P			Michem																		
GELOMERE EAV	High molecular weight polymer	X	X	X	X	X	X												S			S		P			UBM																		
GELTONE II	Low shear, oil mud gelant								X	X																	Baroid																		
GENDRIL FLO	Natural polymer and fluid loss additive	X	X	X			X	X											S					P			Henkel																		
GENDRIL THIK	Natural polymer viscosifier	X	X	X			X	X																			Henkel																		
GEN DRIL THIK	Gum gum	X	X				X												S					P			American Mud																		
GEO-GEL	High temperature stable viscosifying agent	X	X	X	X	X	X												S				P				Magcor																		
GILSONITE	Natural hydrocarbon	X	X	X	X	X	X	X																			Most companies																		
GRAPHITE	Graphite	X	X	X	X	X	X	X	X						S				P	P							Most companies																		
GUFCOBAR	Barite (barytes)	X	X	X	X	X	X	X	X						P										P		GH Gufco																		
GUFCO BIocide S-12	Bactericide	X	X	X	X	X	X	X				P															GH Gufco																		
GUFCO BIOLUBE	Nonpolluting lubricant	X	X	X	X	X	X	X																			GH Gufco																		
GUFCO BROMICAL	Water solution of calcium chloride and calcium bromide	X	X	X	X	X	X	X																		P	GH Gufco																		
GUFCO BROMICAL HD	Water solution of zinc bromide and calcium bromides																								P		GH Gufco																		
GUFCO BROMICON	Calcium bromide powder (fine, medium & coarse)																									P	GH Gufco																		
GUFCO CLS	Chrome lignosulfonate	X	X	X	X	X	X	X										S									GH Gufco																		
GUFCO D-FOAM 40	Defoamer	X	X	X	X	X	X	X					P	S	S							P					GH Gufco																		
GUFCO DMD	Drilling mud detergent	X	X	X	X	X	X	X																			GH Gufco																		
GUFCO FILMKOTE C-33	Corrosion inhibitor	X	X	X	X	X	X	X																		P	GH Gufco																		
GUFCO GEL	Wyoming bentonite	X	X	X	X	X	X	X																			GH Gufco																		
GUFCO HD GEL	Viscosifier for Bromical HD	X	X	X	X	X	X	X										S						P			GH Gufco																		
GUFCO LIG	Mined lignin	X	X	X	X	X	X	X																			GH Gufco																		
GUFCO OXBAN S-10	Oxygen scavenger	X	X	X	X	X	X	X																			GH Gufco																		
GUFCO PLUG	Ground pecan shells	X	X	X	X	X	X	X	X											P						P	GH Gufco																		
GUFCO POLYJEL	Pure synthetic polymer LCM for clear water fluids (Reg. & Coarse)	X	X	X			X																				GH Gufco																		
GUFCO POLYSEAL	LCM for clear water fluids (Reg. & Coarse)	X	X	X																P				P			GH Gufco																		
GUFCO POLYVIS	Polymer and calcium carbonate blend	X	X	X			X													P	S			P			GH Gufco																		
GUFCO PREGEL	Invert mud gelling agent							X	X																P		GH Gufco																		
GUFCO PREMUL	Inverted emulsion							X	X																		GH Gufco																		
GUFCO PREMUL EMA	Invert mud emulsifier							X	X				P														GH Gufco																		
GUFCO PREMUL EMB	Invert mud emulsifier							X	X																		GH Gufco																		
GUFCO PREMUL EMC	Invert mud wetting agent							X	X				P														GH Gufco																		
GUFCO PREMUL X	Invert mud fluid loss control agent							X	X				S		P						P		S				GH Gufco																		
GUFCO SALT GEL	Attapulgite clay			X	X																						GH Gufco																		
GUFCO WALLFREE	Surfactant material to be mixed with diesel oil to free pipe	X	X	X	X	X	X	X	X													P		P			GH Gufco																		
GUFCO WALLKOTE	Liquid asphalt	X	X	X	X	X	X	X									S	S	P	P							GH Gufco																		
GYPSOL III	Gypsum diintegrator	X	X	X																							Cardinal																		
GYPSUM	Gypsum (plaster of paris)	X	X	X	X			X																			Most companies																		
GYPTRON TDF-113	Scale control	X	X	X	X	X	X	X											S			P			P		Champion																		
HALLIBURTON-GEL	Wyoming bentonite	X			X	X	X	X																			Halliburton																		
HEVIWATER	Oxygen scavenger (solid)	X	X	X	X	X	X	X																		P	Dowell																		
ANTI-OXIDANT M129																																													
HEVIWATER DRY	Weighting agent for solids-free fluid	X					X	X												S					P		Dowell																		
CONCENTRATE S35																																													
HEVIWATER GELLING AGENT J164	Gelling agent	X	X	X	X	X	X	X										S						P			Dowell																		
HEVIWATER IC PACKER AND COMPLETION FLUID	Water solution of calcium chloride with density range of 9 to 11.6 ppg including inhibitor and fluid loss control																								P		Dowell																		
HEVIWATER IIC PACKER AND COMPLETION FLUID	Water solution of calcium chloride and calcium bromide with density range of 11.7 to 15.1 ppg including inhibitor and fluid loss control																								P		Dowell																		
HEVIWATER IIIC PACKER AND COMPLETION FLUID	Water solution of CaBr with density of 15.2-17.2 ppg, including inhibitor and fluid loss control																			P					P	S	Dowell																		

-107-



World Oil's 1979-80 Fluids Guide

Recommended for These Systems										Functioning As:																								
Water-base										Oil-base		Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filter Aids	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thinners, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials	Corrosion Inhibitors							
Low pH					High pH																													
Fresh Water	Brackish Water	Sat. Salt Water	Gyp Treated	Lime Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist																									



Product Tradename	Description of Material																										Available from:
HEVIWATER IVC INHIBITED BRINE	Water solution of zinc bromide, calcium bromide and calcium chloride. 15.2 to 19.2 ppg																									P	Dowell
HICELL	Polyanionic cellulose	X	X	X	X	X	X	X		X				S	S		P			P							CDA/HMC
HICELL DS HIDENSE HIMUL Y	Polyanionic cellulose Weighting agent Organophilic colloid	X	X	X	X	X	X	X						S	S		P			P						P	CDA/HMC Halliburton CDA/HMC
HIPOL X	High molecular weight xanthan gum	X	X	X	X	X	X	X									S							P			Messina
HI-WATE	Extra high density powder for blowout control	X	X	X	X	X	X	X		X	X															P	Messina
HME	Selective, nonionic surface active agent	X	X	X	X	X	X	X															P				Chemco
HME ENERGIZER	Selective, nonionic surface active agent	X	X	X	X	X	X	X															P				Montello
HOLE-CONTROL	Modified hydrocarbon compound for shale control	X	X	X	X	X	X	X		X				S	S		P			P		S					Mizell
HOLEMAKER FLOC	Nonionic, selective flocculant	X	X	X	X	X	X	X									P										Montello
HOTGEL	Stable high temperature viscosifying agent	X	X	X	X	X	X	X									S						P				Messina
HOWCO BAR HOWCO SUDS	Weighting agent Nonionic foaming agent	X	X			X	X	X		X									P							P	Halliburton Halliburton
HOWCO SUDS STICKS HS GUARD HS-1	Solid foaming agent Hydrogen sulfide scavenger Sulfide cracking inhibitor	X	X	X	X	X	X	X		X									P							P	Halliburton Arnold & Clarke Western
HTT 450	Polymeric high temperature dispersant, fluid loss control agent	X	X	X	X	X	X	X										P					P				CDA/HMC
HUMIC 333 HUMIC NF	Oil in water emulsion system Acid soluble oil-in-water emulsion workover and completion system	X	X	X				X						P			S						S				CECA CECA
HYDROGEL HYDRO-SPOT	Wyoming bentonite One drum additive spotting fluid for freeing stuck pipe	X	X	X	X		X	X		X	X				P		S						P				Wyo-Ben Mizell
HYDROWATE	Weighted completion fluid																										Halliburton
HY-SEAL HYTEX	Shredded organic fiber Lignosulfonates, synthetic polymer & sized carbonate blend	X		X	X	X	X	X												P							Baroid Texas Brine
IDF ANTIFOAM L-500	Defoamer for polymeric systems	X	X	X	X	X	X	X						P													IDF
IDF AP-21 IDF BACTERIOCIDE DST IDF B-FREE	Polymeric fluid loss reducer Non-phenolic bactericide Spotting fluid for freeing stuck pipe	X	X	X			X						P		P							S					IDF IDF IDF
IDF CL-11 IDF CORROSION INHIBITOR A/C IDF CORROSION INHIBITOR A/S	Chrome lignite Coating amine corrosion inhibitor Sulfide resistant-amine base corrosion inhibitor	X	X	X	X	X	X	X										S				P				P	IDF IDF
IDF CORROSION INHIBITOR O/S IDF CORROSION INHIBITOR PHT IDF DEFOAMER	Oxygen scavenger Coating amine for production wells Alcohol blend	X	X	X	X	X	X	X																			IDF
IDF DF-19 IDF DF-20G IDF D-FOAM	Selective flocculant Flocculant Long chain alcohol	X	X					X									P										IDF IDF IDF
IDF DF-VIS IDF DI-PLUG IDF DRILLING DETERGENT DX-10	Polymeric viscosifier Filter aid material Drilling mud detergent	X	X	X	X		X	X		X	X			S			S		P				P				IDF IDF IDF
IDF DV-88 IDF DYNA LUBE IDF EASY DRILL	Bentonite extender Drilling lubricant Torque reducer	X		X	X	X	X	X		X	X						P					S		P			IDF IDF IDF
IDF EML LUBRICANT IDF FLR-100	Drilling lubricant Polymeric fluid loss reducer	X	X	X	X	X	X	X						S	P							S					IDF IDF
IDF HI-FOAM	Foaming agent	X						X	X										P			S					IDF
IDF HI-TEMP	High temperature fluid loss reducer	X	X	X	X	X	X	X										P		S							IDF
IDF HY-MUL	High temperature fluid loss stabilizer	X	X	X				X	X										P			S					IDF
IDF IDBREAK	Surface active defoamer	X	X	X	X	X	X	X						P													IDF
IDF IDBRIDGE IDF IDCARB-75 IDF IDCARB-150	Oil soluble graded resin Acid soluble graded calcium carbonate Acid soluble graded calcium carbonate	X	X	X			X	X		X	X							S		S					P		IDF IDF IDF

108-

World Oil's 1979-80 Fluids Guide

Product Tradename		Description of Material		Recommended for These Systems										Functioning As:																	Available from:	
				Water-base						Oil-base				Alkalinity, pH Control Additive	Biocides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filterable Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighing Materials	Corrosion Inhibitors			
				Low pH			High pH			Low Solids		Water-in-Oil (Invert)																		Oil Mud		Air, Gas, Mist
				Fresh Water	Brackish Water	Salt, Salt Water	Gyp Treated	Levee Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud																				
IDF IDCIDE-L	Non-phenolic bactericide liquid	X	X	X	X	X	X	X	X	X			P															IDF				
IDF IDCIDE-P	Non-phenolic bactericide powder	X	X	X	X	X	X	X	X	X			P															IDF				
IDF IDFAC	Non-ionic fluoro-surfactant	X	X	X				X	X																			IDF				
IDF IDFILM-120	Film-forming amine inhibitor	X	X	X	X	X	X	X	X			X														P		IDF				
IDF IDFILM-220	Film-forming amine inhibitor	X	X	X								X													P			IDF				
IDF IDFILM-320	Film-forming amine inhibitor	X	X	X																					P			IDF				
IDF IDFILM-620	Atmospheric corrosion inhibitor																											IDF				
IDF IDFLO	Non viscous fluid loss reducer	X	X	X	X	X	X	X	X										P									IDF				
IDF IDHEC	Synthetic cellulose polymer	X	X	X				X	X																			IDF				
IDF IDSCAV-110	Oxygen corrosion scavenger	X	X	X	X	X	X	X	X																	P		IDF				
IDF IDSCAV-110X	Catalysed oxygen corrosion scavenger	X	X	X	X	X	X	X	X																P			IDF				
IDF IDSCAV-210	Oxygen corrosion scavenger	X	X	X	X	X	X	X	X																P			IDF				
IDF IDSCAV-310	Oxygen and sulphite scavenger	X	X	X				X	X			X																IDF				
IDF IDWATE	Acid soluble graded iron compound	X	X	X				X	X										S						P			IDF				
IDF INTERDRILL EMUL	Invert emulsifier										X																	IDF				
IDF INTERDRILL FL	Invert fluid loss reducer									X								S		P								IDF				
IDF INTERDRILL MULTIMUL	Invert system base mixture									X								P		P								IDF				
IDF INTERDRILL O.W.	Invert system oil wetting agent									X															P			IDF				
IDF INTERDRILL SF	Invert fluid loss reducer									X									P						P			IDF				
IDF INTERDRILL VISOL	Polymeric invert viscosifier									X								S								P		IDF				
IDF INTERDRILL VISTONE	Invert viscosifier									X								S								P		IDF				
IDF INTERLOK	Blended lost circulation material	X	X	X	X	X	X	X	X																P			IDF				
IDF MUD FIBER	Fibrous material	X	X	X	X	X	X	X	X									P								P		IDF				
IDF POLY MUL	o/w emulsifier	X						X	X																			IDF				
IDF POLY PLASTIC	Shale stabilizer	X	X	X				X	X										S		P							IDF				
IDF PFS-100	pH buffer for clay free fluids	X	X	X	X	X	X	X	X				P						P							S		IDF				
IDF RHEOPOL	Polymeric fluid loss reducer	X	X	X	X	X	X	X	X																			IDF				
IDF SAFEGUARD 5000	Amine base corrosion inhibitor	X	X	X	X	X	X	X	X																	P		IDF				
IDF SAFEGUARD 5500	Oxygen scavenger	X	X	X	X	X	X	X	X																	P		IDF				
IDF SAFEGUARD 6000	Amine base corrosion inhibitor	X	X	X	X	X	X	X	X																	P		IDF				
IDF SM(X)	Polymeric viscosifier	X	X	X				X	X																			IDF				
IDF SPUD MUD (R)	Polymeric viscosifier	X	X	X				X	X																			IDF				
IDF SS-100	Polymeric shale encapsulator	X	X	X				X	X																			IDF				
IDF TARGARD	Salt mud blend system (dry)	X	X	X	X	X	X	X	X																			IDF				
IMA #2	Deforming & wetting agent	X	X	X	X	X	X	X	X			X						P	P	S					S	P		Wyo-Ben				
IMA CONCENTRATE	Deforming & wetting agent	X	X	X	X	X	X	X	X																			Wyo-Ben				
IMCO BAR	Serite (barytes)	X	X	X	X	X	X	X	X																	P		IMCO				
IMCO BRINEGEL	Attapulgite clay	X	X	X	X	X	X	X	X									P										IMCO				
IMCO CIDE	Blended carbonate solution, bactericide	X	X	X	X	X	X	X	X																			IMCO				
IMCO CRACK CHEK	Sulfide cracking inhibitor	X	X	X	X	X	X	X	X										P									IMCO				
IMCO DEFOAM	Salt water defoamer	X	X	X				X	X																	P		IMCO				
IMCO DRILL-S	Polymer biocide and sized carbonate blend	X	X	X				X	X																			IMCO				
IMCO DRILLTHERM	High temperature fluid loss control	X	X	X				X	X																			IMCO				
IMCO DUROGEL	Viscosifier	X	X	X	X	X	X	X	X																			IMCO				
IMCO EP LUBE	Extreme pressure lubricant	X	X	X	X	X	X	X	X										P									IMCO				
IMCO FLAKES	Shredded callophane flakes	X	X	X	X	X	X	X	X																			IMCO				
IMCO FLOC	Clay flocculant	X	X	X	X	X	X	X	X																			IMCO				
IMCO FOAMANT	Foaming agent	X	X	X	X	X	X	X	X																			IMCO				
IMCO FOAMBAN	All purpose liquid defoamer	X	X	X	X	X	X	X	X										P									IMCO				
IMCO FREEPIPE	Oil sol. surfactant	X	X	X	X	X	X	X	X																			IMCO				
IMCO FYBER	Shredded fiber blend	X	X	X	X	X	X	X	X																			IMCO				
IMCO GEL	Wyoming Bentonite	X	X	X				X	X																			IMCO				
IMCO GELEX	Bentonite extender	X	X	X				X	X																			IMCO				
IMCO HOLECOAT	Water dispersible asphaltic blend	X	X	X	X	X	X	X	X										P	S	S					P		IMCO				
IMCO HYS	Extra hi yield bentonite	X	X	X				X	X																			IMCO				
IMCO IE PAC	Inhibition enhancer	X	X	X				X	X																			IMCO				
IMCO KEN CAL-L	Powdered dispersing agent	X	X	X				X	X																			IMCO				



-109-



World Oil's 1979-80 Fluids Guide

Product Tradename		Description of Material		Recommended for These Systems										Functioning As:														Available from:
				Water-base					Oil-base																			
				Low pH			High pH																					
				Fresh Water	Brackish Water	Sat. Salt Water	Gyp Treated	Lime Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist	Alkalinity, pH Control Additives	Biocides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	
IMCO KEN-GEL IMCO KENOL-S	Organophilic clay Emulsifiers for formulating invert emulsions							X						P		S												IMCO IMCO
IMCO KENOX	Quick lime							X	X					P														IMCO
IMCO KEN-PAK IMCO KEN SUPREME IMCO KEN-X CONC. 1	Conc. for gelatinous oil packs Fatty acid emulsifier Basic invert oil emulsifier							X	X					P														IMCO IMCO IMCO
IMCO KEN-X CONC. 2	Stabilizer; weight suspension agent							X						P														IMCO
IMCO KEN-X CONC. 3	Stabilizer; hi temp filtrate control							X						P														IMCO
IMCO KLAY	Sub-bentonite	X	X	X	X	X	X	X									S						P					IMCO
IMCO KWIKSEAL IN-20 LIG IMCO LOID	Blended LCM Lignitic material Pregelatinized starch	X	X	X	X	X	X	X	X	X				S			P					P	S					IMCO IMCO IMCO
IMCO LUBE-108 IMCO LUBRIKLFEN IMCO MD	Lubricant Non-polluting organic lubricant Mud detergent	X	X	X	X	X	X	X							P													IMCO IMCO IMCO
IMCO MUDDOIL IMCO PERMAFILM IMCO PERMALOID	Oil dispersed asphalt Corrosion inhibitor Pregelatinized starch	X	X	X	X	X	X	X							P			P								P		IMCO IMCO IMCO
IMCO PHOS IMCO PLUG	Phosphate Ground walnut hulls (fine, med. and coarse grades)	X	X	X	X	X	X	X	X	X									P				P					IMCO IMCO
IMCO POLY Rx	Synergistic polymer blend	X	X	X	X	X	X	X						S		P		P		P		P						IMCO
IMCO POLYSAFE IMCO PRESERVOLDO IMCO QBT	Polymer for fluid loss control Paraformaldehyde Quebracho based thinner	X	X	X	X	X	X	X						P			P		S			S						IMCO IMCO IMCO
IMCO RD-111 IMCO RD-2000 IMCO SAFE-PAC	Processed mod. lignosulfonate Dispersant Blended polymers	X	X	X	X	X	X	X	X					S		P		S		S		P	P					IMCO IMCO IMCO
IMCO SAFE PERFSEAL IMCO SAFE-SEAL IMCO SAFE-SEAL X	Blended synthetic polymers Sized carbonates Sized carbonates	X	X	X	X	X	X	X	X	X						P		S	P				S					IMCO IMCO IMCO
IMCO SAFE-TROL	Lignosulfonates, carbohydrates and sized carbonate blend	X	X	X			X	X								P												IMCO
IMCO SAFE-VIS	Synthetic polymer and sized carbonate blend	X	X	X			X									S						P						IMCO
IMCO SAFE-VIS X	Synthetic polymer	X	X	X			X															P						IMCO
IMCO SCALECHEK IMCO SCR IMCO SHURLIFT	Scale inhibitor Shale control reagent Wet processed calcium mag- nesium silicate	X	X	X			X	X												P		P			S	P		IMCO IMCO IMCO
IMCO SP-101 IMCO SPOT IMCO SULF-XII	Sodium polyacrylates Dry blend emulsifier Hydrogen sulfide scavenger	X	X				X	X	X	X	X			S	P		P											IMCO IMCO IMCO
IMCO SUPER GELEX IMCO SWS IMCO THIN	Bentonite extender Anionic-nonionic surfactant Causticized lignite	X	X	X	X	X	X	X						S		S				P		P						IMCO IMCO IMCO
IMCO VC-10 IMCO VR IMCO WATE	Chrome lignosulfonate Gel-builder for invert emulsion Calcium carbonate	X	X	X	X	X	X	X	X	X	X			S		P		S		S		P	P					IMCO IMCO IMCO
IMCO XC IMCO X-CORR IMCO XO ₂	Bacterially produced polymer Corrosion inhibitor Oxygen scavenger	X	X	X	X	X	X	X						P												P		IMCO IMCO IMCO
IMPERMEX IMVIGEL INDUSCRUB	Pregelatinized starch Magnesium amectite Heavy duty cleaner	X	X	X	X	X	X	X							S			P				P						Baroid IMV CE-Natco
INICOR B INIPOL 533	Corrosion inhibitor Surfactant mixed with diesel for freeing stuck pipe	X	X	X	X	X	X	X	X	X	X				S					P								Lambert CECA
INVERMUL INVERPOL IROBAR	Oil mud stabilizer Magnesium amectite Synth. hi density, acid sol. weighting material	X	X		X	X	X	X	X	X	X				P		S					S	P					Baroid IMV DrillSafe
IRONITE SPONGE J-2	Synthetic oxide H ₂ S scavenger Natural gum viscosity builder and fluid-loss control agent	X	X	X	X	X	X	X									S											Ironite Western
JEL-O-GEL	Hydroxyethylcellulose	X	X	X			X										S					P						Completion services
JELFLAKE KANE FIBER KARI	Shredded cellophane Processed cane fiber Polymeric for clay free fluids	X	X	X	X	X	X	X									S				P	P						Baroid Wyo-Ben Brinadd
KATHON WT	Biocide	X	X	X	X	X	X							P														DrillSafe

World Oil's 1979-80
Fluids Guide



WORLD OIL • JUNE 1979

-110-

World Oil's 1979-80 Fluids Guide



World Oil's 1979-80 Fluids Guide

Product Tradename	Description of Material	Recommended for These Systems										Functioning As:														Available from:																
		Water-base					Oil-base					Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filter Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighing Materials	Corrosion Inhibitors															
		Low pH		High pH			Water-in-Oil (Invert)		Oil Mud																																	
		Fresh Water	Brackish Water	Sea Salt Water	Gyp Treated	Lime Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist																															
KELZAN XC POLYMER KEMBREAK	Xanthum gum biopolymer Calcium lignosulfonate	X	X	X	X	X	X	X	X						S		S			S		P					Kelco Arnold & Clarke															
K-FLO KIM-MUD KLEARPAC	Non-ionic surfactant Polymeric for clay free fluids Phosphate ester of alcohol siloxylate	X	X	X			X		X	X	X			P		P		P		S	P	P	P				Baroid Bridgman BASF Wyandotte															
KLEEN-BLOCK KLEEN-BLOCK X KLEEN-DRILL	Non-damaging sized carbonate Non-damaging sized carbonate Non-damaging polymer/filtration control compound	X	X	X	X	X	X	X	X	X									P	P					S		Messina Messina Messina															
KLEEN-MIX	One bag mixture of non- damaging viscosifiers/ filtration agents	X	X	X	X	X	X	X									P						P				Messina															
KLEEN-PAK	Non-damaging synthetic polymer blend	X	X	X			X	X							P								P		S		Messina															
KLEEN-PIL	Non-damaging synthetic polymer blend	X	X	X			X	X							P			S					P				Messina															
KLEEN-SEAL	Non-damaging filtration con- trol blend	X	X	X			X	X									P										Messina															
KLEEN-SPOT	Non-polluting, invert emulsion spotting fluid for stuck pipe	X	X	X	X	X	X	X	X	X			P	P						P					S		Delta Mud															
KLEEN UP	Heavy duty detergent and degreaser	X	X	X																							Magco-bar															
KLEEN-VIS	Non-damaging synthetic polymer	X	X	X			X										S						P				Messina															
KLEEN-VIS X	Non-damaging synthetic polymer	X	X	X			X																P				Messina															
K-LIG	Potassium lignite derivative	X					X							P		P											Baroid															
KOLITE KONTOL KOROHIBIT C-100K	Ground coal Corrosion inhibitor Atmospheric corrosion inhibitor	X	X	X	X	X	X	X	X	X	X									P		S			P		Dowell Trotter C-E Natco															
KOROHIBIT C-115K KOROHIBIT C-122K KOROHIBIT C-675	Corrosion inhibitor H ₂ S scavenger Corrosion inhibitor	X	X	X	X	X	X	X	X	X		X													P		C-E Natco C-E Natco C-E Natco															
KWK-THIK KWK SEAL	Extra hi yield bentonite Combination of granules, flakes and fibers	X	X	X	X	X	X	X									S		P				P				Magco-bar RSOI and ECCO															
KWK VIS	Polymer	X					X	X															P				Wyo-Ben															
L 10	Pure, dried lignite for geo- thermal drilling	X	X	X			X										S		S		P						CECA & Averbare CECA SA															
L 19	Causticized soluble lignite	X	X	X			X	X									S		S		P						Louisiana Mud															
LAMCOBAR	Berite (barytes)	X	X	X	X	X	X	X	X	X														P			Louisiana Mud															
LAMCO CLAY LAMCO DRILLFAS LAMCO E	Sub-bentonite Mud detergent Emulsifier	X	X	X	X	X	X	X	X	X			S	P			S				P	P					Louisiana Mud Louisiana Mud Louisiana Mud															
LAMCO FIBER LAMCO FLAKES LAMCO GEL	Shredded cane fibers Shredded flakes Wyoming bentonite	X	X	X	X	X	X	X	X	X									P				P				Louisiana Mud Louisiana Mud Louisiana Mud															
LAMCO HYDROPROOF LAMCO LIG LAMCO PERMA THINZ	Colloidal asphalt Lignite Aluminum chrome ligno- sulfonate	X	X	X	X	X	X	X	X	X			S	S		S	P		P		P		P				Louisiana Mud Louisiana Mud Louisiana Mud															
LAMCO SLX LAMSALGEL LD-8	Emulsifier & surfactant Attapulgite clay Non-polluting defoamer	X	X	X	X	X	X	X						P							S		P				Louisiana Mud Louisiana Mud Michem															
LEATHERSEAL LEATH-O LECTRO-MIX	Shredded leather Shredded leather Water soluble salts	X	X	X	X	X	X	X	X	X									P		P						Baroid Michem Oil Base															
LENALK LENOX LEO'S PLUG	Causticized lignite Lignite Sunflower seed hulls	X				X	X	X	X	X			S		P					P		P					ECCO ECCO Wyo-Ben															
LHC	Liquid hydrocarbon cement for lost circulation																			P							Western															
LIGCO LIGCON	Lignite Sodium salt of lignitic material	X	X			X	X	X					S		P								S				Michem Michem															
LIGNATE	Processed modified ligno- sulfonate	X	X	X		X	X	X					S		P							P					Tainite															
LIGNEX	Low molecular weight ferro- chrome lignosulfonate	X	X			X											S		S		P						CECA & Averbare CECA															
LIGNEX H	Sodium lignosulfonate	X	X	X	X	X	X							P		S						P																				
LIGNO THIN LIGTEX-K LIME	Lignite base thinner Potassium lignite derivative Hydrated lime	X				X	X	X	X	X	X	P	S		P		S		P		P	S				S	Am. Colloid Texas Brine Most companies															
LO LOSS	Guar gum	X	X				X										S					P					Magco-bar															

World Oil's 1979-80 Fluids Guide



Product Tradename	Description of Material	Fresh W Brackie	Salt Sal	Gyp Tre	Lime Tr	Fresh W	Low Sal	Water-H	Oil Mud	Air, Gas	Alkaline	Bacteria	Defoam	Emulsif	Lubrica	Floccul	Filtrate	Foaming	Lost Cir	Shale C	Surface Thinner	Viscosif	Calcium	Weightin	Corrosi	Available from	
LOWATE LST-5	Acid soluble weight material Non-emulsion, all purpose surfactant	X	X	X	X	X	X	X	X		X										P			P		Magcobar Cardinal	
LST-12	Silt suspending surfactant	X	X	X																	P	P				Cardinal	
LST-13	Oil, paraffin dispersant								X												P	P				Cardinal	
LST-34	Cationic fluorsurfactant	X	X	X																	P	P				Cardinal	
LST-36	Fluorsurfactant blend for foam- ing hydrocarbon frac fluids								X									P								Cardinal	
LST-37	Fluorsurfactant blend for foam- ing mixtures of hydrocarbon and water from well bore								X									P								Cardinal	
LST-35	Nonionic fluorsurfactant	X	X	X																	P					Cardinal	
LUBE-KOTE	Graphite	X	X	X	X	X	X	X						P												Magcobar Texas Brine	
LUBE-TEX	Biodegradable lubricant	X	X	X	X	X	X	X					P														
LUBRA-GLIDE	Solid friction reducer & "gumbo" stabilizer	X	X	X	X	X	X	X	X	X			P													Sun Chem.	
LUBRA-PHASE I	Non ionic mud surfactant, shale solids control	X	X		X	X	X	X									S			S	P					Sun Chem.	
LUBRA-PHASE II	Biodegradable & non-toxic lubricant	X	X		X	X	X	X					P													Sun Chem.	
LUBRA-SEAL	Micronized, surface modified, cellulose-base fiber	X	X	X	X	X	X	X	X	X			S				S		P							Sun Chem.	
LUBRE TORQUE	Tera reducer	X	X	X	X	X	X						S	P												UBM CDA/HMC	
LUBRICANT JJ35	Extreme pressure lubricant	X	X	X	X	X	X						S	P													
LUBRICANT 458	Biodegradable and nontoxic lubricant	X	X	X	X	X	X	X					P													Lambert	
LUBRI-FILM	E.P. lubricant and corrosion inhib.	X	X	X	X	X	X	X					P											P		Michem	
LUBRI-SAL	Non-polluting lubricant	X	X	X	X	X	X	X					P													Michem	
MAGCOBAR	Barite (barytes)	X	X	X	X	X	X	X	X	X													P			Magcobar	
MAGCOBRINE C.B	Pre-blended calcium chloride/ Bromide brines for workover, completion and packers																									Magcobar	
MAGCOBRINE C.C	Pre-blended calcium chloride brine for workover, comple- tion and packers																									Magcobar	
MAGCOBRINE P.C	Potassium chloride	X	X	X	X	X	X	X															P			Magcobar	
MAGCOBRINE S.C	Sodium chloride	X	X	X	X	X	X	X									S				S		P			Magcobar	
MAGCO DEFOAMER A-40	Defoamer		X	X									P				S				S		P			Magcobar Magcobar Magcobar	
MAGCOFOAMER 76	Foaming agent								X									P								Magcobar	
MAGCO FIBER	Blended fibers	X	X	X	X	X	X	X											P							Magcobar	
MAGCOGEL	Wyoming bentonite	X	X	X	X	X	X	X														P				Magcobar	
MAGCO INHIBITOR 101	Corrosion inhibitor for packer fluids	X	X	X	X	X	X	X																		P	Magcobar
MAGCO INHIBITOR 202	Corrosion inhibitor for direct treating oil drill string	X	X	X	X	X	X	X		X																P	Magcobar
MAGCO INHIBITOR 303	Organic amine corrosion inhibitor for workover, comple- tion and packer brines	X	X	X	X	X	X	X																		P	Magcobar
MAGCOLUBE	Biodegradable lubricant	X	X	X	X	X	X	X																			Magcobar
MAGCONATE	Petroleum sulfonate emulsifier	X	X	X	X	X	X	X																			Magcobar
MAGCONOL	Alcohol defoamer	X	X	X	X	X	X	X				P		P	P											Magcobar Magcobar Magcobar	
MAGCOPHOS	Sodium tetraphosphate	X	X	X	X	X	X	X					P								P	P				Magcobar	
MAGCO POLY DEFOAMER	Organic polyol defoamer	X	X	X	X	X	X	X																		Magcobar	
MAGCO POLY SAL	Organic polymer	X	X	X	X	X	X	X										P								Magcobar	
MAGNACIDE	Bacteriostats	X	X	X	X	X	X	X				P	P													Aquasens Oil Base	
MAGNE-MAGIC	Blend of magnesium and calcium compounds	X	X	X		X					P						P						S				
MAGNE-SALT	Water soluble salts	X	X	X			X	X												P						Oil Base	
MAGNE-SET	Controlled solidifier	X	X	X			X	X												P						Oil Base	
MAGNE-SET ACCELERATOR	Material for reducing set time for Magne-Set	X	X	X	X	X	X	X											P							Oil Base	
MAGNE-SET RETARDER	Material for increasing set time for Magne-Set	X	X	X	X	X	X	X											P							Oil Base	
MAGNESIUM CHLORIDE	Magnesium chloride				X	X																		S		Most companies ECCO Oil Base	
MAGNE-THIN	Low molecular wt. polymer	X	X					X												S			P				
MARBLE	Natural calcium carbonate	X	X	X	X	X	X	X	X	X														P	P	Edwards Messina	
MARITE	4.7 specific gravity weighting agent	X	X	X	X	X	X	X	X	X														P	S		
MC-500	Fluid loss control, high temper- ature stability additive							X	X									P								Migal	
MESUCO-BAR	Barite (barytes)	X	X	X	X	X	X	X	X															P		Messina	
MESUCO-BEN	Bentonite	X	X	X	X	X	X	X	X															P		Messina	
MESUCO-CL	Sodium salt of lignitic material	X	X			X	X	X					S				P	P				P				Messina	
MESUCO-CRCL	Chrome lignitic compound	X	X	X		X	X	X									S			P	P					Messina	
MESUCO FIBER	Shredded plant fibers	X	X	X	X	X	X	X												P	P					Messina	
MESUCO FLAKE	Sized and crimped cellophane flakes	X	X	X	X	X	X	X	X											P	P					Messina	

World Oil's 1979-80 Fluids Guide

Recommended for These Systems										Functioning As															
Water-base								Oil-base																	
Low pH					High pH																				
Fresh Water	Brackish Water	Salt Water	Gyp Treated	Lime Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist	Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials	Corrosion Inhibitors



Product Tradename	Description of Material	Fresh	Brack	Salt	Gyp	Lime	Fresh	Low	Water	Air, C	Alkal	Back	Defo	Emul	Flocc	Filtr	Foam	Lost	Shale	Surf	Ther	Visco	Calc	Weg	Corro	Available from:
MESUCO-FOAM	Versatile foaming agent for fresh to salt saturated muds									X							P									Messina
MESUCO-GEL	Wyoming bentonite (API spec.)	X	X	X	X	X	X	X									P					P				Messina
MESUCO-GEL	Wyoming bentonite	X	X	X	X	X	X	X														P				Messina
MESUCO-HEC	Hydroxyethylcellulose	X	X	X	X	X	X	X		X							P					P				Messina
MESUCO-KL	Potassium lignitic compound	X	X	X	X	X	X	X									P									Messina
MESUCO-LIG	Lignitic material	X	X	X	X	X	X	X									P									Messina
MESUCO MUD DETERGENT	Concentrated mud detergent	X	X	X	X	X	X	X						S							P					Messina
MESUCO-PLUG	High strength ground nut shells	X	X	X	X	X	X	X	X	X						S			P							Messina
MESUCO SALT CLAY	Attapulgite clay		X	X	X	X	X	X															P			Messina
MESUCO-SEAL	Scientific blend of loss circulation materials	X	X	X	X	X	X	X											P							Messina
MESUCO-SORB	H ₂ S scavenger	X	X	X	X	X	X	X	X																P	Messina
MESUCO SUPER GEL	Extra high yield bentonite	X	X	X	X	X	X	X								S						P				Messina
MESUCO WORKOVER-5	High molecular weight polymer-calcium carbonate blend	X	X	X															P							Messina
MF-1	Polymer, selective flocculant	X	X	X	X	X	X	X	X								P									RDSI
MCA	Mica flakes (sev. grades avail.)	X	X	X	X	X	X	X	X	X									P							Most companies
MICATEX	Mica flakes (fine, med. and coarse)	X	X	X	X	X	X	X	X	X										P						Beroid
MIL-BAR	Barite (barites)	X	X	X	X	X	X	X	X	X														P		Michem
MILCHEM MD	Mud detergent	X	X	X	X	X	X	X							S								P			Michem
MILCHEM PIPE-GARD	Zinc chromate corrosion inhibitor	X	X	X	X	X	X	X																	P	Michem
MIL CON	Neutralized heavy metal mod. lignite	X	X	X	X	X	X	X						S			P					S				Michem
MIL-FIBER	Shredded cane fibers	X	X	X	X	X	X	X											P							Michem
MILFLAKE	Shredded cellophane fibers	X	X	X	X	X	X	X											P							Michem
MIL-FREE	Surfactant for mixing with diesel oil to free stuck pipe	X	X	X	X	X	X	X							P											Michem
MIL-GARD	H ₂ S scavenger	X	X	X	X	X	X	X																	P	Michem
MILGEL	Wyoming bentonite	X	X	X	X	X	X	X		X													P			Michem
MIL-PLATE	Diesel oil replacement	X	X	X	X	X	X	X																		Michem
MIL-PLUG	Ground walnut hulls	X	X	X	X	X	X	X	X	X										P						Michem
MIL-POLYMER 302	Biodegradable polymer viscosifier for water base mud	X	X	X			X	X									S					P				Michem
MIL-POLYMER 303	Drilling polymer with biocide	X	X	X			X	X					S				P					P				Michem
MIL-POLYMER 304	Drilling polymer with biocide for calcium contaminated systems	X	X	X			X						S				P					P				Michem
MIL-POLYMER 305	Drilling polymer for moderate temperature systems	X	X	X			X	X									P						P			Michem
MIL-POLYMER 306	Drilling polymer for moderate to high temp. systems	X	X	X			X	X									P						P			Michem
MIL-TEMP	Stabilize flow & fluid loss of water base muds at high temp.	X	X	X	X	X	X	X									S						P			Michem
MIXICAL	Acid soluble fluid loss additive and lost circulation material for Polybrine systems	X	X	X			X	X	X								P	P								Magco-bar
MON-DET	Mud detergent	X	X	X	X	X	X	X						S							P		P			Montello
MONEX	Flocculant and bentonite extender	X	X	X	X	X	X	X									P									ECCO
MON EX	Co-polymer, flocculant and clay extender	X	X				X	X									P						P			Montello
MON FOAM	Foaming agent for fresh or salt water									X								P								Montello
MON HIB	Film forming amine to control drill pipe corrosion	X	X	X	X	X	X	X																P		Montello
MONOIL CONCENTRATE	Concentrate for Oil Base invert system								X						P											Montello
MON PAC	High molecular weight, poly-anionic cellulosic polymer	X	X	X	X	X	X	X		X				S	S		P		P				P			Montello
MON PAC ULTRA LO	Polyanionic cellulose ultra viscosity	X	X	X	X	X	X	X						S	S		P		P							Montello
MOR-REX	For shale stabilization	X	X	X	X	X	X	X																		Corn
MOR-REX MR-1	Modified starch	X	X	X	X	X	X	X											P			P				Michem
MUDBAN	Mud removal agent	X	X	X	X	X	X	X	X																	Dowell
MUD-EX	Oil-base mud thinner, dispersant	X	X	X	X	X	X	X																		
MUDFLUSH	Mud detergent	X	X	X	X	X	X	X																P	P	Trelotte
MUDFLUSH	Mud removal agent	X	X	X	X	X	X	X																		Halliburton
MUD FIBER	Blended cane and wood fiber	X	X	X	X	X	X	X											P							Magco-bar
MUD-MUL	Non-ionic emulsifier	X	X	X	X	X	X	X																		Messina
MUD-MUL (LS)	Anionic/nonionic (low solids emulsifier)	X	X	X	X	X	X	X									P									Messina
MUD-PAC	Corrosion inhibitor for solids laden packer fluids	X	X	X	X	X	X	X																	P	Michem
MUD SEAL	Cellulose fibers	X	X	X	X	X	X	X	X											P						Telnite

World Oil's 1979-80 Fluids Guide



World Oil's 1979-80 Fluids Guide

		Recommended for These Systems										Functioning As:														Available from:																	
		Water-base					Oil-base					Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials																	
		Low pH			High pH		Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist																																	
Product Tradename	Description of Material	Fresh Water	Brackish Water	Salt Water	Gyp Treated	Lime Treated																																					
MULCON	To correct acid number in oil muds & invert muds							X	X						S		S		S				P				Drillsafe																
MULDOS	Emulsifier & wetting agent for oil base & invert muds							X	X	X				P		S					P	S					Drillsafe																
MULFIL	Stabilizes suspension & plastering prop. in oil m.							X	X														P				Drillsafe																
MULFIX	Oil soluble liquid for use as packer fluid, for fracturing and acidizing							X	X	X							S		S	S		S	P				Drillsafe																
MULFLO	Flow improver							X	X					P	S	S					P	P					Drillsafe																
MULGEL	Viscosifier & gelling agent for oil base & invert muds							X	X							P				S	S		P				Drillsafe																
MULOIL A	Dry or liquid basic comp. for hi temp/hi water oil base muds							X	X					S	S	P				S			S		S		Drillsafe																
MULOIL B	Dry or liquid basic comp. for oil base muds								X					S	S	P				S			S		S		Drillsafe																
MULSEAL	Asphaltic, oil soluble LCM for oil base & invert							X	X							S	P						S				Drillsafe																
MULSTAB	Stabilizes filtrate & emulsion under hi temp. in oil base muds							X	X					P		S					S	P					Drillsafe																
MULTICEL	CMC, all grades	X	X	X	X	X	X	X		X							P						P				Drillsafe																
MULTICEL EHV	Super hi via CMC	X	X	X	X	X	X	X	X	X							P						P				Drillsafe																
MULTICOAT	Water-dispersible asphalt for filtration, inhibition & lubric. in water base m.	X	X	X	X	X	X	X	X	X				S		P				P			S				Drillsafe																
MULTICRYL	Polysaccharide, all grades	X	X	X	X	X	X	X		X				S		P				P	P		P				Drillsafe																
MULTIDET	Drilling mud detergent	X	X	X	X	X	X	X																			Drillsafe																
MULTIDEX	Hi temperature stable polysaccharide, 200°C	X	X	X	X	X	X	X									P			S			S				Drillsafe																
MULTI-DF	Liquid all purpose d-foam	X	X	X	X	X	X	X					P														Drillsafe																
MULTI-DFD	Dry all purpose d-foamer	X	X	X	X	X	X	X					P														Drillsafe																
MULTIFLOC	Selective, nonionic flocculant	X	X	X	X	X	X	X							P				P								Drillsafe																
MULTIFOAM	All purpose foaming agent	X	X	X	X	X	X	X		X				S	S		P		P		S		P				Drillsafe																
MULTIMEC	Hydroxyethylcellulose	X	X	X	X	X	X	X																			Drillsafe																
MULTILAX	Oil soluble surfactant to free stuck pipe	X	X	X	X	X	X	X	X					S	S		S					P					Drillsafe																
MULTILIG C	Chrome lignite	X	X	X	X	X	X	X										S			P	S	P				Drillsafe																
MULTILUBE	Extreme pressure lubricant	X	X	X	X	X	X	X									P					S					Drillsafe																
MULTILUBE A	Non-polluting EP lubricant	X	X	X	X	X	X	X									P					S					Drillsafe																
MULTIMER	Blend of hi temp. & salt resistant polymers	X	X	X	X	X	X	X		X							P			S			S				Drillsafe																
MULTIMYL	Pregelatinized starch		X	X	X	X	X	X		X							P						P				Drillsafe																
MULTIMYL A	Non-fermenting, temp. stable carboxymethyl-starch	X	X	X	X	X	X	X									P			S			P				Drillsafe																
MULTIPLAST	Non-polluting, hi soluble low solids LCM-additive	X	X	X	X	X	X	X	X	X										P							Drillsafe																
MULTIPOL HT	Resin/lignitic blend for filtrate & vis control at hi temperatures	X	X	X	X	X	X	X										P		S		S	S				Drillsafe																
MULTISAL	Colloidal base & filtrate reducer for clayfree muds		X	X			X				P						P						S				Drillsafe																
MULTISEAL	Combination of granules flakes and fibers	X	X	X	X	X	X	X												P							Eisenman																
MULTITHIN	Chrome lignosulfonate	X	X	X	X	X	X	X						S		S			S		P						Drillsafe																
MULTIVIS	Hi molecular weight, salt resistant polymer	X	X	X	X	X	X	X		X							S		S				P				Drillsafe																
MULTI-XC	Hi molecular weight xanthan gum polymer	X	X	X	X	X	X	X		X				S		S							P				Drillsafe																
MV-405	Liquid oil phase mud emulsifier & wetting agent							X	X						S	S				P							Michem																
MY-LO-JEL	Pregelatinized starch	X	X	X	X	X	X	X									P							S			Magcoar																
MY-LO-JEL PRESERVATIVE N-4886	Starch preservatives	X	X		X		X	X				P															Magcoar																
NAMINAGIL	Organic polyelectrolyte polymers							X									P										Tretolite																
NAMINAGIL	Corrosion inhibitor, biocide	X	X									S														P	Rhone Poulenc																
NATROSOL	Hydroxy ethyl cellulose	X					X	X									P							P			Baker Chem.																
NELU PHANE	Cellophane flakes	X	X	X	X	X	X	X	X	X										P							CDA/HMC																
NELU PHLAX	Shredded fibre	X	X	X	X	X	X	X	X	X										P							CDA/HMC																
NELU STARCH NF-1	Pregelatinized starch	X	X	X	X	X	X	X						P					P					S			CDA/HMC																
NFP	Liquid antifoam agent	X	X	X	X	X	X	X						P													Halliburton																
N-GAUGE	Powdered antifoam agent	X	X	X	X	X	X	X																			Halliburton																
N-GAUGE	Potassium lignosulfonate	X	X	X	X	X	X	X									S			P		S					Delta Mud																
NOCOR 133, 166, 203	Corrosion inhibitors									X																P	Cardinal																
NOCOR 224	Corrosion inhibitors									X																P	Cardinal																
NOCOR 439	Corrosion inhibitors	X	X	X	X	X	X	X	X													S				P	Cardinal																
NOCOR 565	Bactericide	X	X	X	X	X	X	X					P														Cardinal																
NOCOR 615	Defoamer	X	X	X	X	X	X	X					P	P													Cardinal																

- 114 -

World Oil's 1979-80 Fluids Guide



World Oil's 1979-80 Fluids Guide		Recommended for These Systems										Functioning As															Available from		
		Water-base					Oil-base					Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Scale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials		Corrosion Inhibitors	
		Low pH			High pH		Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist																			
		Fresh Water	Brackish Water	Salt Water	Gyp Treated	Line Treated					Fresh Water																		
Product Tradename	Description of Material	Fresh Water	Brackish Water	Salt Water	Gyp Treated	Line Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist	Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Scale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials	Corrosion Inhibitors	Available from	
NOCOR 643	Surfactant and corr. inhib.	X	X	X	X	X	X	X														P					S	Cardinal	
NOCOR 644	Air/Gas Drig. foamer with inhibitor										X								P		P					P	Cardinal		
NOCOR 645	Air/Gas Drig. foamer										X								P		P					P	Cardinal		
NOCOR 700 S	Surfactants	X	X	X	X	X	X	X													P						Cardinal		
NOMOUSS D	Defoamer	X	X				X	X						P													CECA		
NOMOUSS S	Defoamer	X	X				X	X						P													CECA		
NORUST 720	Corrosion inhibitor		X	X							X	S														P	CECA		
NORUST 995	Corrosion inhibitor for completion brines		X	X								S														P	CECA SA		
NORUST 998	Corrosion inhibitor for calcium completion brines		X	X								S														P	CECA SA		
NORUST ACH	Oxygen corrosion inhibitor	X	X	X			X	X		X																	P	CECA	
NORUST ASW	Oxygen corrosion inhibitor	X	X								X								P								P	CECA	
NORUST OC 40	Foaming agent for fresh or salt water																										P	CECA	
NORUST PA23D	H ₂ S and CO ₂ corrosion inhibitor		X	X					X	X																	P	CECA	
NORUST SC 41	Oxygen scavenger	X	X	X	X	X	X	X																			P	CECA	
NO-STIK	Surface active agent	X	X	X	X	X	X	X																			P	RDSI	
NOVADRIL 30	Polyanionic cellulosic polymers	X	X	X												S	P	S				P					P	Hercules	
NOVADRIL 40	Polyanionic cellulosic polymers	X	X	X	X	X	X	X	X	X							P										P	Hercules	
NOXYGEN	Oxygen scavenger	X	X	X	X	X	X	X																			P	Michem	
N.P.L. 122	Environmental Protection Lubricant	X	X	X	X	X	X	X								P	P				P						P	Trinity Mud	
NUT PLUG	Ground walnut shells	X	X	X	X	X	X	X	X	X											P	S						Magcobar	
NYMCEL	Carboxy methyl cellulose in low, high and ultra high viscosities, technical and pure grades	X	X	X	X	X	X	X			X			S				P				S				P	Nyma		
OA 13	Oxidizing agent	X	X	X							X	P																Completion	
OB ACID PYRO	Sodium acid pyro phosphate	X	X	X			X	X															P	P			P	Oil Base	
OB BENGEL	Wyoming bentonite	X	X	X	X	X	X	X											S								P	Oil Base	
OB C 655	Blended oxygen scavenger, corrosion inhibitor, biocide	X	X	X	X	X	X	X			X	P															P	CDA/HMC	
OB C 656	Blended oxygen scavenger, corrosion inhibitor, biocide	X	X	X	X			X			X	P															P	CDA/HMC	
OB CLAY	Sub-bentonite	X	X	X	X	X	X	X											S								P	Oil Base	
OB CLORGE	Attapulgite clay	X	X	X			X																				P	Oil Base	
OB DEFOAMER	Defoamer	X	X	X	X	X	X	X						P														Oil Base	
OB DETERGENT	Mud detergent	X	X	X	X	X	X	X																				Oil Base	
OB DIVERTER	Stimulation fluid diverter	X	X	X	X	X	X	X	X	X				S				S		P		P	P				P	Oil Base	
OB DIVERTER-HT	Stimulation diverter for hi-temp, hi-pres wells	X	X	X	X	X	X	X	X	X				S				S		P								Oil Base	
OB FLOC	Clay flocculant	X	X	X	X	X	X	X											S	S	P							Oil Base	
OB GEL	Conc. for improving Black Magic gel; basic conc. for location mixing of Black Magic SP	X	X	X	X	X	X	X	X	X	X				S	S		P				S	P	S	S			Oil Base	
OB GRAVEL PACK FLUID	Basic oil base mud conc. for gravel packing range of 7.5 to 17-ppg (migr. mixed)								X	X								P							S			Oil Base	
OB HEVYWATE	Barite (barites)	X	X	X	X	X	X	X	X	X																	P	Oil Base	
OB HEXAGLAS	Sodium hexameta phosphate	X	X	X			X	X																P	P			P	Oil Base
OB HI-CAL	Calcium hydroxide	X	X	X	X	X	X	X	X	X	X	P	S	S				S	S								S	Oil Base	
OB LIME HYDRATE	Hydrated lime						X		X	X	X	P	S	S													S	Oil Base	
OB MIX FIX	Visc. reducer for Black Magic and mixing oil adjuster						X		X	X														P	S		S	Oil Base	
OB NUT SHELL	Ground pecan shell	X	X	X	X	X	X	X	X	X											P							P	Oil Base
OB PACKER FLUID	Basic oil base mud conc. for tubing annulus packing migr. mixed	X	X	X	X	X	X	X	X	X																		P	Oil Base
OB PFA	Thixotropic adjuster for oil base packer fluids								X	X								S							P		S	Oil Base	
OB PYRO	Sodium tetraphosphate	X	X	X			X	X																				P	Oil Base
OB SAPP	Sodium acid pyro phosphate	X	X	X			X	X																				P	Oil Base
OB STARCH PRESERVATIVE	Paraformaldehyde											P																P	Oil Base
OB STP	Sodium tetraphosphate	X	X	X			X	X																				P	Oil Base
OB WATE	Calcium carbonate									X																	P	Oil Base	
OB WELL PAC	Basic oil base mud conc. for well hole & casing protection (migr. mixed)	X	X	X	X	X	X	X	X	X	X																P	Oil Base	
OB WELL WASH	Drig. fluid dispersant; borehole cleaner	X	X	X	X	X	X	X	X	X												S	P					P	Oil Base
OB WOODSEAL	Wood shavings	X	X	X	X	X	X	X	X	X																		P	Oil Base
OCOBAR	Barite	X	X	X	X	X	X	X	X	X																		P	OCOMA
OCOBAR BULK	Bulk barite	X	X	X	X	X	X	X	X	X																		P	OCOMA
OCOBAR MB	Marine bagged barite	X	X	X	X	X	X	X	X	X																		P	OCOMA
OCOBAR T	Coarse barite	X	X	X	X	X	X	X	X	X																		P	OCOMA

- 115 -

World Oil's 1979-80 Fluids Guide



World Oil's 1979-80 Fluids Guide

Product Tradename	Description of Material	Recommended for These Systems										Functioning As													Available from:															
		Water-base					Oil-base		Alkalinity, pH Control Additives	Biocides	Defoamers	Emulsifiers	Lubricants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighing Materials	Corrosion Inhibitors																	
		Low pH		High pH		Low Solids	Water-in-Oil (Invert)	Oil Mud																																
		Fresh Water	Brackish Water	Sat. Salt Water	Glycol Treated	Line Treated	Fresh Water	Low Solids																																
OCOBEN OCOBACHO OCO DEFOAMER	Bentonite Spray dried quebracho Defoaming agent	X	X	X	X	X	X	X						S	S					P				OCOMA OCOMA OCOMA																
OCO DRILL LUBE OCO FIBER OCO FLAKE	Torque reducer Shredded cane fiber Shredded cellophane fibers	X	X	X	X	X	X	X	X			S	P				P							OCOMA OCOMA OCOMA																
OCO FOAM	Foaming agent for fresh to salt saturated mud systems								X						P									OCOMA																
OCO FREE PIPE	Surfactant to mix with diesel to free stuck pipe	X	X	X	X	X	X	X				P					P							OCOMA																
OCOGEL	Wyoming bentonite	X	X	X	X	X	X								P						P			OCOMA																
OCO GEO FIX	Shale & solids control agent mud surfactant for high temp.	X	X		X	X	X		X								S	P						OCOMA																
OCO GEO GEL OCO GEO LOW	High temperature stable clay Dispersable hydrocarbon for high temp. fluid loss control	X	X	X	X	X	X	X	X					S	P		S	P			P			OCOMA OCOMA																
OCO GEO MUD	Resin-lignitic blend for hi/hp rheological/fluid loss control	X	X	X	X	X	X							P			S	S						OCOMA																
OCO HEAVY WATE OCOLIG	Lead sulfide powder Lignitic material	X	X	X	X	X	X	X	X			S		P					P					OCOMA OCOMA																
OCOLIG C OCOLIG CL OCOLIG K	Caustic lignitic material Chrome lignitic material Caustic Potash lignitic material	X	X	X		X	X	X				S		S		P		P						OCOMA OCOMA OCOMA																
OCO MUL	Additive for stable invert emulsions							X	X			P		S						S				OCOMA																
OCO MUL S	Supplement emulsifier and wetting agent							X	X			P		S			S							OCOMA																
OCO MULTILOW	Non fermenting starch	X	X	X	X	X	X							P						S				OCOMA																
OCO OIL LOW	Fluid loss control agent for inverted systems							X	X			S		P										OCOMA																
OCO OIL VIS OCO PERMAFLOW	Viscosity and gelling agent Lignosulfonate	X	X	X	X	X	X	X	X			S		S			S		P					OCOMA OCOMA																
OCOPHOS OCO PLUG OCO POLY LOW	Sodium tetraphosphate Ground walnut hulls High molecular weight poly-anionic cellulose	X	X	X		X	X	X	X									P	P					OCOMA OCOMA OCOMA																
OCO SALT GEL OCO SEAL	Attapulgite clay Combination of granules, flakes and fibers for lost circulation control	X	X	X	X	X	X										S		P					OCOMA OCOMA																
OCO SK CLAY	Very high temp. clay	X	X	X	X	X	X							P						P				OCOMA																
OCO SPOT FREE	Conc. for hi density spotting fluid	X	X	X	X	X	X	X						P				P						OCOMA																
OCO SULFSORB OCO SUPER FLOCK	H ₂ S scavenger Fibreculants	X	X	X	X	X	X	X							P								P	OCOMA OCOMA																
OCO SUPER SLICK OCO SUPER VIS OCOTHIN	Diesel oil replacement Extra hi yield bentonite Chrome modified ligno-sulfonate	X	X	X	X	X	X	X						P			S		S		P			OCOMA OCOMA OCOMA																
OCOWATE OCOWET OD 110	Calcium carbonate Oil wetting agent Corrosion inhibitor (dry)	X	X	X				X	X			P		S			S					P		OCOMA OCOMA Wyo-Ben																
OD 1100 OD 1550T OD 1600	Corrosion inhibitor (liquid) Salt inhibitor (liquid) Oxygen scavenger (dry)	X	X	X	X	X	X	X															P	Wyo-Ben Wyo-Ben Wyo-Ben																
O. K. LIQUID OS-1L O-S-S PILL	Detergent Oxygen scavenger Polymeric for clay free fluids	X	X	X			X	X							P					P			P	King Magcobar Brinadd																
OMC OIL BASE MUD SPACER	Oil mud conditioner Cement spacer for oil base muds							X	X										P	S				Baroid Dowell																
OILCOMPLETE	No-solids/non-damaging oil base completion fluid concentration	X	X	X	X	X	X	X	X			S	P		P					P				Messina																
OIL CON OILFAZE OILFOS	Supplemental emulsifier, wetting agent Sacked oil base mud conc. Sodium tetraphosphate							X	X			P		S			S							Messina Magcobar Milchem																
OIL MUL OIL MUL-L OILMUL-P OILPACK	Additive for stable invert emulsions Liquid additive for stable invert emulsions Powder additive for stable invert emulsions Oil base packer fluid concentration							X	X			P		S					S					Messina Messina Messina Messina																
OILSPERSE OILSPERSE-I	Amine Mud removal agent							X	X			P				P	P					P		Brinadd Halliburton																

World Oil's 1979-80 Fluids Guide



World Oil's 1979-80 Fluids Guide

Product Tradename	Description of Material	Recommended for These Systems	Oil-base	Functioning As:	Available from																																																																																																																																																																																																																																																																																																	
		Water-base																																																																																																																																																																																																																																																																																																				

World Oil's 1979-80 Fluids Guide

Recommended for These Systems										Functioning As:														
Water-base																								
Low pH					High pH																			
Fresh Water	Brackish Water	Salt Water	Gyp Treated	Line Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist	Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Scale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials



Product Tradename	Description of Material	Fresh Water	Brackish Water	Salt Water	Gyp Treated	Line Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist	Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Scale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials	Corrosion Inhibitors	Available from:
PETRO-LUBE	Biodegradable-nontoxic lubricant and bit bailing agent	X	X	X	X	X	X	X																				American Mud
PETROTONE	Organophilic clay powder for use as oil mud suspended agent								X	X																		Baroid
PH-10	Butters for clay free fluids	X	X	X	X	X	X					P																Brinadd
PH-REGULATOR	pH control and corros. inhib. liquid	X	X	X	X	X	X					P	S															UBM
PHEND SEAL	Flat, chip shape, thermoset resinoid material, particle graded	X	X	X	X	X	X	X	X	X										P								Montello
PIPE LAX	Surfactant mtl. to be mixed with diesel oil to free pipe	X	X	X	X	X	X	X	X																			Magcobar
PIPE-LOOSE	Surfactant mtl. to be mixed with diesel oil to free pipe	X	X	X	X	X	X	X																				Drill. Add.
PIPE-OFF	Surfactant to be mixed with diesel oil to free stuck pipe	X	X	X	X	X	X	X	X																			Dixie
PIPE OUT	Oil soluble surfactant	X	X	X	X	X	X	X																				CDA/HMC
PLUG-GIT	Processed hardwood fiber	X	X	X	X	X	X	X												P		P						Baroid
PLUGMIX	Combination of granulates fibers	X	X	X	X	X	X													P								UBM
PLUG-SAL	Sized salt with dispersant				X																							Texas Brine
PLURADOT	Surfactants								X	X	X			P	P				P			P	P	P				BASF Wyandotte
PLURAFAC	Surfactants								X	X	X			P	P				P			P	P	P				BASF Wyandotte
PLURONIC	Surfactants								X	X	X			P	P				P			P	P	P				BASF Wyandotte
POLIDRIL	Polymer for clay free drilling	X	X	X	X	X	X	X	X	X				P					P			P	P		P			Brinadd
POLIHEAL	Polymeric lignosulfonate complex for clay-free fluids	X	X	X														P										Brinadd
POLVIS 10	Synthetic flocculant							X										P										CDA/HMC
POLY-AN	Hi molecular weight poly-anionic cellulosic polymer	X	X	X	X	X	X	X			X			S	S			P			P	P						Drillase
POLY-BEN	Polymer, flocculant and bentonite extender	X	X					X	X									P						P				Messina
POLY-BRIDGE	Salt complexing polymer	X	X	X				X																				Michem
POLYBRINE	Acid soluble material for viscosity and fluid loss control	X	X	X				X	X	X								S						P				Oil Base
POLYCLAY	Bentonite extender	X	X					X	X									P						P				Drillase
POLYDRLG	Modified HEC	X	X	X														P						P				Drigmud
POLYFLAKE	Oil sol. plastic film	X	X	X	X	X	X	X	X	X										P								Baroid
POLYLUBE	Extreme pressure lubricant	X	X	X	X	X	X	X	X									P										Oil Base Ger.
POLY-MAGIC	Co-polymer							X											P		S		P					Oil Base
POLY-MAGIC 21	Co-polymer							X											S		P		S					Oil Base
POLY-MAGIC-100	Co-polymer							X											S		P		S					Oil Base
POLY-MAGIC HT	Co-polymer							X											S		P		S					Oil Base
POLY-MAGIC SUPER	Co-polymer							X											S		P		S					Oil Base
HI VIS								X											S		P		S					Oil Base
POLYMER 214	Scale inhibitor	X	X	X	X	X	X	X																				Aquaness
POLYMER PLUG	Lost circulation plug	X	X	X	X	X	X																					Dowell
POLY-NOX	Oxygen scavenger for polymer fluids	X	X	X				X																				Michem
POLY-S	Sodium polyacrylate liquid system	X	X	X	X	X	X	X											P		S		S					Wyo-Ben
POLY-SEC	Selective flocculant and bentonite extender	X	X				X	X	X										P					P				Am. Colloid
POLY-SEC KD	Selective flocculant and bentonite extender for non-dispersed muds	X						X	X										S					P				Am. Colloid
POLY-SEC UD	Polymer for nondispersed muds	X						X	X										P	S				P				Am. Colloid
POLY-SLICK	Granular high angle drilling lubricant	X	X	X	X	X	X												P		S							Messina
POLYSURF	Drilling mud surfactant	X	X	X	X	X	X	X											S		S		P					CDA/HMC
POLYTEX	Organic polymer blend	X	X	X				X												P								Texas Brine
POTASSIUM CHLORIDE	Potassium chloride	X	X	X				X	X													P						Most companies
PREMIUM GEL	Bentonite	X	X					X											P				P					Am. Colloid
PRESANTIL	Surfactant mixed with diesel to free stuck pipe	X	X	X	X	X	X	X	X													P						Lambert
PRESERVATIVE 4AD	Paraformaldehyde	X	X	X	X			X						P														CDA/HMC
PRESERVATIVE PCP	Sodium pentachlorophenate	X	X	X	X	X	X	X						P														CDA/HMC
PRO-2	Coating for atmospheric corrosion conditions																											Michem
PROGIME	Calcium-lignosulfonate	X	X	X	X	X	X	X	X	X									P		S		P					Avebena & CECA
PRO FIBER	Shredded excelsior material emulsions and water blocks	X	X	X	X	X	X	X	X	X																		Wyo-Ben and ECCO
PROTECTO FOL	Water dispersable asphalt additive	X	X	X	X	X	X	X	X										S		P		P			S		UBM
PROTECTOMAGIC	Oil dispersed asphalt used as oil phase in emulsion muds	X	X	X	X	X	X	X	X										S	S	P		S	S				Oil Base
PROTECTOMAGIC-M	Water dispersable asphalt additive	X	X	X	X	X	X	X											S		P		P			S		Oil Base

World Oil's 1979-80 Fluids Guide



World Oil's 1979-80 Fluids Guide

Product Tradename	Description of Material	Recommended for These Systems										Functioning As:															Available from:	
		Water-base					Oil-base																					
		Low pH			High pH																							
		Fresh Water	Brackish Water	Sea. Salt Water	Gyp Treated	Lime Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist	Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Scale Control Inhib.	Surface Active Agents	Thinner, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials		
PROTECTOMAGIC S	Sacked asphalt conc. location mixed w/diesel for use as oil phase in emulsion muds	X	X	X	X	X	X	X	X								S	S	P		S	S					Oil Base	
PROTECTOZONE J211	Fluid-loss additive for brines less than 9.6 ppg	X	X			X	X	X										P									Dowell	
PROTECTOZONE J212	Fluid-loss additive for brines heavier than 9.6 ppg				X													P									Dowell	
PROTECTOZONE J213	Fluid loss additive for brines, premixed package (solids)	X	X	X			X	X										S	P				P				Dowell	
PROTECTOZONE J214	Bridging agent for workover brines	X	X	X															P								Dowell	
PROTECTOZONE J215	Brine viscosifier				X													S					P				Dowell	
PROXEL AB	Mud and starch preservative	X	X	X	X	X	X	X	X			P	P													S	ICI	
PROXEL GXL	Mud and starch preservative	X	X	X	X	X	X	X	X			P	P													S	ICI	
PW 20 30	Polyanionic fluid loss reducer and viscosifier	X	X	X	X	X	X	X	X					S				P			P		P		P		Novacel	
PWG	Polymeric water gel	X	X	X	X	X	X	X	X	X										P							Halliburton	
Q-BROXIN	Ferrochrome lignosulfonate	X	X	X	X	X	X	X	X						S				S	P	S		P				Baroid	
QF-5	Cellulose gelling agent	X	X	X																							Cardinal	
QF-6	Chemically modified low residue guar	X	X	X														P									Cardinal	
Q-PILL	Polymeric for clay free fluids	X	X	X															P		P			P			Brinadd	
Q-TROL	Inhibited mud additive	X	X				X	X											S								Am. Colloid	
QUEBRACHO	Quebracho (tannin) extract	X	X	X	X	X	X	X											P				P				Most companies	
QUICK-SET	Quick setting cement for lost circulation	X	X	X	X	X	X	X												P							Western	
QUIK-FOAM	Biodegradable foaming agent										X										P						Baroid	
QUIK-GEL	High yield bentonite	X						X																P			Baroid	
QUIK-MUD	Suspension of concentrated viscosifiers	X	X					X			X				S		S						P		P		Baroid	
QUIK-TROL	Organic polymer	X	X	X	X	X	X														P		P				Baroid	
RAPIDRIL	Organic polymer; clay extender and solids flocculant	X	X	X				X									P						P				Magcober	
RAYVAN	Chrome lignosulfonate	X	X	X	X	X	X	X																			Wyo-Ben	
RD-11	Acid corrosion inhibitor	X	X	X																			P				Cardinal	
RD-12	High temperature acid corrosion inhibitor	X	X	X																							Cardinal	
REDOU-TORQUE	Extreme pressure lubricant	X	X	X	X	X	X	X								P											Oil Base Ger.	
RED DEVIL CLAY	High yield bentonite	X						X																P			American Mud	
REDWOOD FIBER	Redwood fiber	X	X	X	X	X	X	X												P							Most companies	
REGULATED FILL-UP	Quick set cement for lost circulation	X	X	X	X	X	X	X												P							Dowell	
RELEASE	Surface active agent	X	X	X	X	X	X	X									S	S				P					Montello and ECCO	
REMOX	Catalyzed sodium sulfite																									P	Arnold & Clarke	
REMOX L	Liquid sodium bisulfite																									P	Arnold & Clarke	
RESINEX	Resin additive, fluid loss control agent	X	X	X	X	X	X											P		S							Magcober	
RETABOND A.P.	Selective flocculant																	P	P								Schott	
REV-DUST	Inert clay		X	X				X																			Wyo-Ben	
R.F.R. 123	Resinous filtrate reducer	X	X	X	X	X	X	X											P								Trinity Mud	
RHODOPOL 23	High molecular weight long chain polymer xanthan gum	X	X	X			X	X															P				Rhone-Poulenc	
RHODOPOL 23-P	Xanthan gum biopolymer	X	X	X	X	X	X	X																P			& CCEA	
RHODORSIL	Silicone anti-foam	X	X	X	X	X	X	X					P								S						Rhone-Poulenc	
ROCAGIL	Acrylic resin and catalysts	X	X	X	X	X	X	X	X	X	X									P							Rhone-Poulenc	
ROCAGIL 1295-S	Acrylic resin and catalysts	X	X	X	X	X	X	X	X	X	X									P							Rhone-Poulenc	
ROD LUBE	E. P. lubricant for drill rods	X	X	X	X	X	X	X						S	P												Magcober	
RUF-PLUG	Woody ring of corn cob	X	X	X	X	X	X	X													P						Wyo-Ben	
S-61	Amine base scale inhib.	X	X	X	X	X	X	X																			Wyo-Ben	
SALINEX	Seawater emulsifier		X											P	S		S									P	Magcober	
SALGITE	Attapulgite clay	X	X																								Arnold & Clarke	
SALT	Sodium chloride	X	X	X	X			X	X										P				S		S		Most companies	
SALT GEL	Attapulgite clay	X	X																								Magcober	
SALT GEL HI-YIELD	Attapulgite	X	X	X	X			X																			ECCO	
SALT MUD	Attapulgite clay	X	X																				P				Wyo-Ben	
SALT WATER CLAY	Attapulgite clay	X	X	X	X			X										S					P				American Mud	
SALT WATER GEL	Attapulgite clay	X	X	X	X	X	X	X																			Michem	
SAM 4	Spacer fluid	X	X	X	X	X	X	X	X	X													P				Halliburton	
SAM 5	Spacer fluid	X	X	X	X	X	X	X	X	X																	Halliburton	
SANHEAL PILL	Polymeric-lignosulfonate complex for clay free fluids	X	X	X															P	P			P				Brinadd	
SAPP	Sodium acid pyrophosphate	X	X	X																							Magcober	
SCALE-BAN	Scale inhibitor for drilling muds	X	X	X	X	X	X	X															P	P			Michem	
SCALEHIBIT S-208K	Scale inhibitor	X	X	X	X	X	X	X																			C-E Natco	
SCALEHIBIT S-401	Scale inhibitor	X	X	X	X	X	X	X																			C-E Natco	
SCALEHIBIT S-404	Scale inhibitor	X	X	X	X	X	X	X																			C-E Natco	

-119-

World Oil's 1979-80 Fluids Guide



Product Tradename	Description of Material	Fresh	Brack	Salt S	Gyp T	Lime	Fresh	Low S	Water	Oil Mu	Air, Ga	Alkali	Bacter	Defoam	Emulsi	Lubric	Floccul	Filtera	Foamin	Lost C	Shale C	Surfact	Thinner	Viscosi	Calcium	Weight	Corrosi	Available from
SCAVENGER x H ₂ S	Powdered inorganic H ₂ S scavenger	X	X	X	X	X	X	X	X		X											S			S	P		Lamberti
SCORTRON GDF-50	Detergent, scale, corrosion inhibitor	X	X	X	X	X	X	X	X		X				S											P		Champion
SE-11	Secondary emulsifier for oil base and invert emulsion muds								X	X				P		S					S							Magcober
SEABAR	Barium sulfate	X	X	X	X	X	X	X	X																			Seamud
SEABEN	Bentonite	X	X	X	X	X	X	X	X																			Seamud
SEA BLEND	Filtrate reducer and viscosifier	X	X	X														S	P				P	P				Seamud
SEA CARB	Lost circulation and weighting material		X	X																	P							Seamud
SEA CLAY	Fibrous asbestos	X	X	X	X	X	X	X	X	X																		Seamud
SEADRILL	High yield viscosifier	X	X	X	X			X		X								S		S			P	P				Tainite
SEA-FLO	Quick dissolving hi-molweight polymer	X	X	X	X	X	X	X							S	S		P			P		P					Enka
SEAFLO	Aluminum complex ligno-sulfonate	X	X	X	X	X	X	X									S				P							Seamud
SEAFLO-C	Chrome lignosulfonate	X	X	X	X	X	X	X							S		S				S		P					Seamud
SEA-FREE	Pipe freeing compound	X	X	X	X	X	X	X	X																			Seamud
SEALIG	Lignite	X	X	X	X	X	X	X	X					S			P						S	P				Seamud
SEA MUD	Sepiolite	X	X	X			X				X				S		S											Seamud
SEAMUL	Salt water emulsifier and surfactant		X	X	X		X							P			S				S	S						Baroid
SEA VIS	Viscosifier																											Seamud
SEPARAN	Clay flocculant						X										P											Seamud
SEPGEL	Sepiolite		X	X	X	X	X	X																				Drillate
SERVO CK, UCA	Corrosion inhibitor, bactericide	X	X	X	X	X	X	X	X				P					S						P				Servo
SERVO MCA	Oxygen scavengers, flocculants	X	X	X	X	X	X	X	X								P									P	P	Servo
SHALE LIG	Potassium lignite	X							X																			Arnold & Clarke
SHALE-TONE	Wettable asphaltic blend for shale control	X	X	X	X	X	X	X	X	X					S		P				P							Dixie
SHUR-GEL	Beneficiated bentonite mud conditioner	X	X																						S			Baroid
SHUR-PLUG	Dehydrated graded cellulosic bridging agent	X	X	X	X	X	X	X									P		P									Shur-Plug
SHUR-PLUG	Granular polymer/clay blend for sealing vugular loss zones	X	X	X	X	X	X	X	X	X	X									P								Shur-Plug
BRIDGE BOMB	Alkaline liquid catalyst	X	X	X	X		X	X			P										P							Shur-Plug
SHUR-PLUG LINK-UP																												Shur-Plug
SHUR-PLUG PRONTO-PLUG	Blend of water soluble polymers & graded cellulosic bridging agent	X	X	X	X	X	X	X	X	X	X				S	P		P					P					Shur-Plug
SL-1000	Scale inhibitor	X	X	X	X	X	X	X																				Magcober
SIDERITE	Acid soluble weight material	X	X	X	X	X			X	X																P	P	Magcober
SIGTEX	Synthetic polymers	X	X	X			X																					Texas Brine
SIMPLE SEAL	Polymeric lignosulfonate complex & sized carbonate blend	X	X	X													P		P				P					Brinadd
SIMULSOL P4	Emulsifier oil-water	X	X	X	X	X	X	X						P	S													CECA
SLICKCOAT	Pipe coating lubricant	X	X	X	X	X	X	X	X						P		S											Massina
SLICKPIPE	Biodegradable non-toxic mud lubricant corrosion inhibitor and diesel oil substitute	X	X	X	X	X	X	X						P	P		S				S				S	S		Massina
SLIX	Torque reducer	X	X	X	X	X	X	X						P														Montello
SLUGGIT	Calcium carbonate for clay free fluids (particle sized)	X	X	X																P								Brinadd
COARSE																												Brinadd
GRANDE																												Most companies
MAX																												Most companies
MEDIUM																												Most companies
MICRO																												Most companies
SLUGHEAL	Polymeric-lignosulfonate complex for clay free fluids	X	X	X			X											P										Brinadd
SODA ASH	Sodium carbonate	X	X	X	X	X	X	X			S																	Most companies
SODIUM BICARBONATE	Sodium bicarbonate	X	X		X	X	X	X			S																	Most companies
SODIUM CARBONATE	Soda ash	X	X	X	X	X	X	X			S																	Most companies
SODIUM DICHROMATE	Sodium dichromate	X	X	X	X	X	X	X																				Most companies
SODIUM HEXAMETA PHOSPHATE	Sodium hexameta phosphate	X	X	X			X																					ECCO
SODIUM SULFITE	Oxygen scavenger	X	X	X	X	X	X	X	X																			Most companies
SOLWKIK	Instant dissolving viscosifier	X	X	X	X	X	X	X		X			S	S		S							P					Enka
SOLTEX	Sulfonated residuum	X	X	X	X	X	X	X	X	X				P	P		S			P								Drill Spec. and ECCO
SOLUBLE-WATE	Acid soluble weighting material for workover/completion fluids	X	X	X	X	X	X		X	X																P		Messina
SOLUBREAK	Viscosity breaker for clay free fluids	X	X	X																								Brinadd
SOLUBRIDGE	Particle sized resin for clay free fluids	X	X	X																								Brinadd
FINE																												Brinadd
MEDIUM																												Brinadd
COARSE																												Brinadd

World Oil's 1979-80 Fluids Guide

Recommended for These Systems										Functioning As:														
Water-base					Oil-base																			
Low pH		High pH																						
Fresh Water	Brackish Water	Salt Water	Gyp Treated	Line Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist	Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials



Product Tradename	Description of Material	Fresh Brack	Salt S.	Gyp T	Line	Fresh	Low Sol	Water	Oil Mud	Air, Gas	Alkaline	Bacteria	Deicing	Emulsifier	Lubricant	Flocculant	Filtrate	Foaming	Lost Circ	Shale C	Surface	Thinner	Viscosity	Calcium	Corrosion	Available from
SOLUKLEEN	Polymeric-lignosulfonate complex for clay free fluids	X	X	X			X										P						P			Brinadd
SOLVAGUIK	Emulsifier for clay free fluids							X									P						P			Brinadd
SOLVITEX C.P. SORB-OK SPACER 1000	Modified polymer Oxygen scavenger Mud-cement spacer, fluid loss control agent	X	X	X	X	X	X	X									S						P			Scholten Messina Dowell
SPACER 1001	Cement spacer for oil base muds							X	X								P					P	P			Dowell
SPEEDER-P	Extreme pressure lubricants and wetting agents	X	X	X	X	X	X	X	X					S	P							P				Tainite
SPEEDER-X	Surfactant for mixing with diesel oil to free pipe	X	X	X	X	X	X	X	X													P				Tainite
SPECIAL ADDITIVE 47	Non-viscous organic lqd. for treating water, water base mud or dry contam. of oil base muds							X	X				S			S					P	S	S			Oil Base
SPECIAL ADDITIVE 47X	Powder for treating oil base muds contaminated by water base muds								X				S									P				Oil Base
SPECIAL ADDITIVE 58	Weight suspension stabilizer and mixing adjuster for oil base muds							X	X														P	S		Oil Base
SPECIAL ADDITIVE 77	Surfactant for treatment of water contamination							X	X				S								P					Oil Base
SPECIAL ADDITIVE 81	Oil base mud stabilizer								X				P													Oil Base
SPECIAL ADDITIVE 81-A	Concentrated oil base mud stabilizer								X				P			S					S	P	S			Oil Base
SPECIAL ADDITIVE 252 SPERSENE STABIL HOLE	Defoamer fluids Chrome lignosulfonate Sacked asphalt-added dry to system or as a mixture with oil	X	X	X	X	X	X	X	X				P				S	S		S	P		S			Oil Base Magcober Magcober
STABILITE STABILOSE	Organic phosphate thinner Carboxymethylated polymer low viscosity	X	X				X	X		X							P				S	P		S		Baroid Scholten
STABL-PROP	Chrome-lignite	X	X	X	X	X	X										S				P	P				Drill Add
STABL-VIS STAFLO	Chrome-lignosulfonate High molecular weight poly-anionic cellulosic polymer	X	X	X	X	X	X	X		X			S			S	P			S	P	P				Drill Add Enka
STAFOAM 202	Biodegradable foaming agent	X	X	X					X					S			P				P		P			American Mud
STAFLO-EXLO STARCH STARFIX	Polyanionic cellulose Pregelatinized starch Non-fermenting starch-based polymer	X	X	X	X	X	X	X	X	X		S		P			P			P	S	S	S			Enka Most companies Messina
STARLOSE STORIT	Non-fermenting starch Preservative for clay-free fluids	X	X	X									P				P					S				Michem Brinadd
STUCKBREAKER	Surfactant product for mixing with diesel oil to free stuck pipe	X	X	X	X	X	X	X						P								P				Messina
SUPER ASBESTOS SUPER COL SUPER DRILL	Asbestos fibre Mod. extra high yield bentonite Specially treated lignite	X	X	X	X	X	X	X									S	S				P	P			CDA/HMC Michem Montello
SUPERDRILL	Treated lignite for dispersed systems													S	P					P	S					Chemo
SUPER EXTEND SUPERGEL	Bentonite extender Beneficiated bentonite	X	X				X	X									P					P	P			CDA/HMC Arnold & Clarke
SUPER GEL SUPER LIG SUPER LUBE FLOW	High yield bentonite Lignite Pure, pulverized, high temperature lignite	X	X				X	X					S	P	P						P	P				Am. Colloid Am. Colloid Montello
SUPERMUL SUPER SHALE-TROL 202 SUPER TREAT	Non-ionic emulsifier Organo-aluminum complex Soluble lignite	X	X	X	X	X	X	X					P							P	S					CDA/HMC Michem Am. Colloid
SUPER VISBESTOS SUPER VISBESTOS (CRUSHED) SUPER-WATE	Fibrous asbestos material Pre-sheared, wet-refined, pelletized, crysotile asbestos Special high density weighting material for blowout control only	X	X	X	X	X	X	X	X													P	P			Magcober Montello Magcober
SURF-ACT	Mud surfactant, shale and solids control agent	X	X		X	X	X	X		X									S	P						Messina
SURFAK E SURFAK M	Emulsifier Nonionic surfactant for solids control; solubilizer for CMC & starch fluids	X	X	X	X	X	X	X					P	S	S						S					Magcober Magcober
SURFATRON DP-61 SURFDRI	Surfactant Biodegradable, non-ionic wetting agent	X	X	X	X	X	X	X													P	P				Champion American Mud
SURFLO-B11	Corrosion inhibitor and biocide for treating solids free packer fluids																									Baroid

-121- 8

WORLD OIL • JUNE 1979

World Oil's 1979-80 Fluids Guide



Product Tradename	Description of Material	Fresh	Brack	Salt	Gyp	Low	Free	Low	Wet	Oil	Air	Alkal	Back	Def	Emul	Flocc	Filtr	Foam	Lost	Shale	Surf	Thin	Visc	Well	Cont	Available from:
SURFLO-B33 SURFLO-H35 SURFLO-S362	Bicide for drig. and pkr. fluids Scale inhibitor Foaming agent for fresh or salt water	X	X	X	X	X	X	X						P					P						P	Baroid Baroid Baroid
SURFLO-S375	Foaming agent for fresh or salt water									X								P								Baroid
SURFLO-S378	Foaming agent for fresh or salt water									X								P								Baroid
SURFLO-S390	Foaming agent for fresh or salt water									X								P								Baroid
SURFLO-W300 SURF-LUBE TANNATHIN	Surface active defoamer Powdered surfactant lubricant Lignite	X	X	X	X	X	X	X	X					P	S	P	S				P	S				Baroid Dixie Magcober
TANNEX	Quatracho extract and lignitic ml.	X	X			X	X	X						S		S					P					Baroid
TBA TEL-BAR	Temporary blocking agent Barite (barytes)	X	X	X	X	X	X	X	X	X									P					P		Halliburton Telnite
TEL-CELLOSE-H TEL-CELLOSE-L TEL-CELLOSE-TL	CMC (pure grade hi-vis) CMC (pure grade low-vis) CMC (technical grade low-vis)	X	X	X	X	X	X	X									S					P	S			Telnite Telnite Telnite
TEL-CELLOSE-TM TEL-CLEAN TEL-D.D.	CMC (technical grade regular) Water soluble lubricant Drilling mud detergent and wetting agent	X	X	X	X	X	X	X						S	P		P					P	S			Telnite Telnite Telnite
TEL-DEXT TEL-FIBER TEL-FLAKE	Organic polymer Fibrous material Shredded cellophane flakes	X	X	X	X		X	X	X	X							P						S			Telnite Telnite Telnite
TEL-GEL TEL-LIG TEL-LIG-K	Bentonite Ferrochrome lignosulfonate Ferrochrome potassium lignosulfonate	X	X	X	X	X	X	X						S		S			S			P				Telnite Telnite Telnite
TELNITE-A TELNITE-B TEL-PLUG	Processed lignite Processed sodium lignite Ground walnut shells	X	X			X	X	X						S		P					P	P				Telnite Telnite Telnite
TEL-POLYMER-L TEL-POLYMER-H TEL-PHOS	Polyanionic cellulose Polyanionic cellulose Sodium tetraphosphate	X	X	X	X	X	X							S	S	P			P			P				Telnite Telnite Telnite
TEL-SAPP TEL-SEAL TEL-STOP	Sodium acid pyrophosphate Vermiculite flakes Cotton seed hulls (coarse and fine)	X	X	X	X	X	X	X	X	X							P		P		P					Telnite Telnite Telnite
TEMBLOK TEMPOSEAL TEMP-WATE	High viscosity fluid Temporary lost circulation plug Coarse barite for temporary weight control					X	X			X	X							P								Halliburton Western Messina
TETRONIC TET THIN THERMOGEL	Surfactants Sodium tetraphosphate High temperature saprolite	X	X	X		X	X	X	X	X	S			P			P			P	P	P				BASF Wyandotte CDA/HMC IMV
THERMO-SEAL THERMO-TROL THIX	Dispersable hydrocarbon for HT water loss control Resin-lignitic blend for HT/HP rheological/water loss control Emulsifier for clay free fluids	X	X	X	X		X							S	P	S	P					S				Messina Messina Brinadd
THIXOLITE THIXOMENT THIXOMIX	Lightweight thixotropic cement for lost circulation Thixotropic cement for lost circulation Thixotropic cement																	P								Western Western Halliburton
THIX-PAK THIXSET CEMENT TIMPLEX	Emulsifier for clay free fluids Thixotropic cement Lignite based thinner and fluid loss reducer for high temperature service	X	X	X	X	X	X	X	X	X							P		P			P				Brinadd Halliburton T.I.M.
TLC TOL-AEROMER TOL-FOAM	Temporary loss control Oxygen corrosion inhibitor Foaming agent	X	X	X	X	X	X	X	X	X								P						P		Halliburton Tretolite Tretolite
TORKEASE TORO TRIM II TORO-TRIM	Drilling mud lubricant Biodegradable and non-toxic lubricant Biodegradable non-toxic lubricant	X	X	X	X	X	X	X						P	P				S							DSC Inc. Baroid Baroid
TORQUEOUT TREAT TRETOLITE	Biodegradable-Non toxic lubricant Polymeric for clay free fluids Multipurpose products	X	X	X	X	X	X	X	X					P	P	S	P	S	P	S		P	P			Origmud Brinadd Tretolite
TRILEX TRIL-G	Basic invert oil emulsifier Oil mud asphaltic gelling agent									X													P			Delta Mud Delta Mud

World Oil's 1979-80 Fluids Guide



World Oil's 1979-80 Fluids Guide		Recommended for These Systems										Functioning As:														Available from:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
		Water-base					Oil-base					Alkalinity, pH Control Additives	Bactericides	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thinner, Dispersants	Viscosifiers	Calcium Removers		Weighing Materials	Corrosion Inhibitors																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
		Low pH			High pH		Water-in-Oil (Invert)		Oil Mud																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
		Fresh Water	Brackish Water	Sat. Salt Water	Gyp Treated	Line Treated	Fresh Water	Low Solids	Water-in-Oil (Invert)	Oil Mud	Air, Gas, Mist																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
Product Tradename	Description of Material:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											

World Oil's 1979-80 Fluids Guide



World Oil's 1979-80 Fluids Guide

Product Tradename	Description of Material	Recommended for These Systems										Functioning As														Available from		
		Water-base					Oil-base					Alkalinity, pH Control Additives	Backerfills	Defoamers	Emulsifiers	Lubricants	Flocculants	Filtrate Reducers	Foaming Agents	Lost Circ. Mat.	Shale Control Inhib.	Surface Active Agents	Thickeners, Dispersants	Viscosifiers	Calcium Removers	Weighting Materials	Corrosion Inhibitors	
		Low pH		High pH			Water in Oil (Invert)	Oil Mud	Air, Gas, Mist																			
		Fresh Water	Brackish Water	Salt Water	Gyp Treated	Line Treated																						
WEIGHTEX WHITE MAGIC	Calcium carbonate Emulsifier and thinner for emulsion muds	X	X	X	X	X	X	X							P		S			S	P					P	Texas Brine Oil Base	
WK-1	Filtrate reducer for kill fluids	X	X	X			X										P				S						Western	
WL-100 WMW-1 W.O. 20	Sodium polyacrylate Mud removal agent High-yield polymeric for viscosity and filtration control	X	X	X			X	X										P					P				RDSI Western Michem	
W.C. 21	High yield polymer viscosifier	X	X	X																			P				Michem	
W.O. 22	Acid soluble polymeric viscosi- fier-low density fluids	X	X	X			X											P					P				Michem	
W.O. 23	Acid soluble polymeric viscosi- fier-high density fluids	X	X	X			X											P					P				Michem	
W.O. 30	Acid-soluble, graded calcium carbonate	X	X	X															P						S		Michem	
W.O. 35	Acid soluble-high specific gravity weighting material	X	X	X	X	X	X																	P			Michem	
W.O. 50	Polymer and graded calcium carbonate	X	X	X															P								Michem	
W.O. DEFOAM WYO-BEN X	Alcohol base compound Polymer, flocculant and clay extender	X	X				X	X						P			P						P				Michem Wyo-Ben	
X-900A	Powdered catalysed oxygen scavenger	X	X	X	X		X	X		X																P	C-E Natco	
X-900L X-905 XB 23	Oxygen scavenger Oxygen scavenger Biopolymer	X	X	X	X		X	X		X	X															P	C-E Natco CE-Natco CECA	
XC POLYMER	Xanthum gum biopolymer	X	X	X	X	X	X	X						S			S						P				Keico & Completion Michem Michem	
XKB-LIG XKB-THIN	Potassium lignite Iron complexed lignosulfonate	X	X	X			X	X										P		S	S	S						
XMDL XP-20 X-PEL G	Multi-functional drilling liquid Chrome lignite Water dispersable asphaltite (Gilsontite)	X	X	X	X	X	X	X							P			S			P	P				S	RDSI Magcobar RDSI	
XPW-2000 X-TEND	Atmospheric corrosion inhibitor Powdered flocculant and clay extender	X	X				X	X										P					P			P	Magcobar Baroid	
ZEQ	Polymeric for clay free fluids	X	X	X														P					P				Brinadd	
ZEQEL ZERO TORQUE ZINC BROMIDE	Attapulgite powder Graded granular thermo beads Zinc bromide/calcium bromide (liquid blend)	X	X	X	X	X	X	X	X	X					P									P		P	Baroid Delta Mud Delta Mud	

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

APPENDIX B

DEVELOPMENT OF CONVECTION-DIFFUSION MODEL EQUATIONS¹

For the purposes of detection-system design, the convection-diffusion equation will be used. The equation is:

$$D\nabla^2 C - V \cdot \nabla C = \partial C / \partial t \quad (B-1)$$

where

C = the concentration of pollutant at point x,y,z

D = the diffusion coefficient

V = a vector given the direction and magnitude of fluid flow

t = time

9.1/8"

In pollutant fate modeling, V is not constant, but varies in space across the aquifer. As V may vary, the use of equation B-1 for modeling pollutant transport in diverse areas would be inappropriate; however, as detection-monitoring stations are to be placed fairly close together, the variation in V may be neglected for detection-system design.

If we assume that a source of the pollution (0,0,t) is located at the origin, and that V is in the x direction, and that variation in the a direction may be neglected, the solution of equation B-1 is:

$$C(x,y,t) = \int_0^t C(0,0,t-t_1) \frac{dt_1}{\sqrt{(2\pi)^2 D t_1}} e^{-[(x-Vt_1)^2 + y^2]/2Dt_1} \quad (B-2)$$

where

V = velocity in the x direction

D = the diffusion coefficient

t₁ = a small time interval

¹For background information, see Aris, 1978.

BEGIN
LAST LINE
OF TEXT

3/8"

-125-

BOTTOM OF
IMAGE AREA:
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

For an initial burst that quickly damps out, the form of C may be said to be:

$$C(0,0,t) = P \delta(t) \quad (B-3)$$

P = level of the burst at time 0

(t) = the dirac delta function.

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

The solution to equation (B-2), then, is:

$$C(x,y,t) = \frac{P}{(2\pi)^2 Dt_1} e^{-[(x-Vt)^2 + y^2]/2Dt} \quad (B-4)$$

Let us set the minimum detection level $S_0 = C_0$.
Solving the equation

$$\frac{P}{(2\pi)^2 Dt_1} e^{-[(x-Vt)^2 + y^2]/2Dt} = C_0 \quad (B-5)$$

we find

$$[(x-Vt)^2 + y^2] = 2Dt[W - 1/2 \ln t/t_1] \quad (B-6)$$

where

$$W = \ln [P/(2\pi C_0 (Dt_1)^{1/2})]$$

$$t_1 = 1 \text{ sec}$$

Now, as the term $\ln t/t_1$ is small compared with the other term, we may neglect it, and we get:

$$(x-Vt)^2 + y^2 = 2DtW \quad (B-7)$$

Equation 7 is the formula of an ellipse. Solving for one-half the width of the ellipse in the x and y directions, we find:

$$\Delta x = 1/2 \sqrt{2WDt_0 - (x-Vt_0)^2}, \text{ for } (x-Vt_0)^2 < WDt_0 \quad (B-8)$$

$$= 0 \text{ elsewhere}$$

$$\Delta y = 1/2 \sqrt{2WDt_0 - y^2}, \text{ for } y^2 < WDt_0 \quad (B-9)$$

$$= 0 \text{ elsewhere}$$

It can be seen that the maximum y spacing occurs at $x = vt_0$, and the maximum x spacing at $y = 0$, so that $(vt_0, 0)$ is an optimal place to put a station if we wish to minimize the number of stations (see Figure B-1).

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

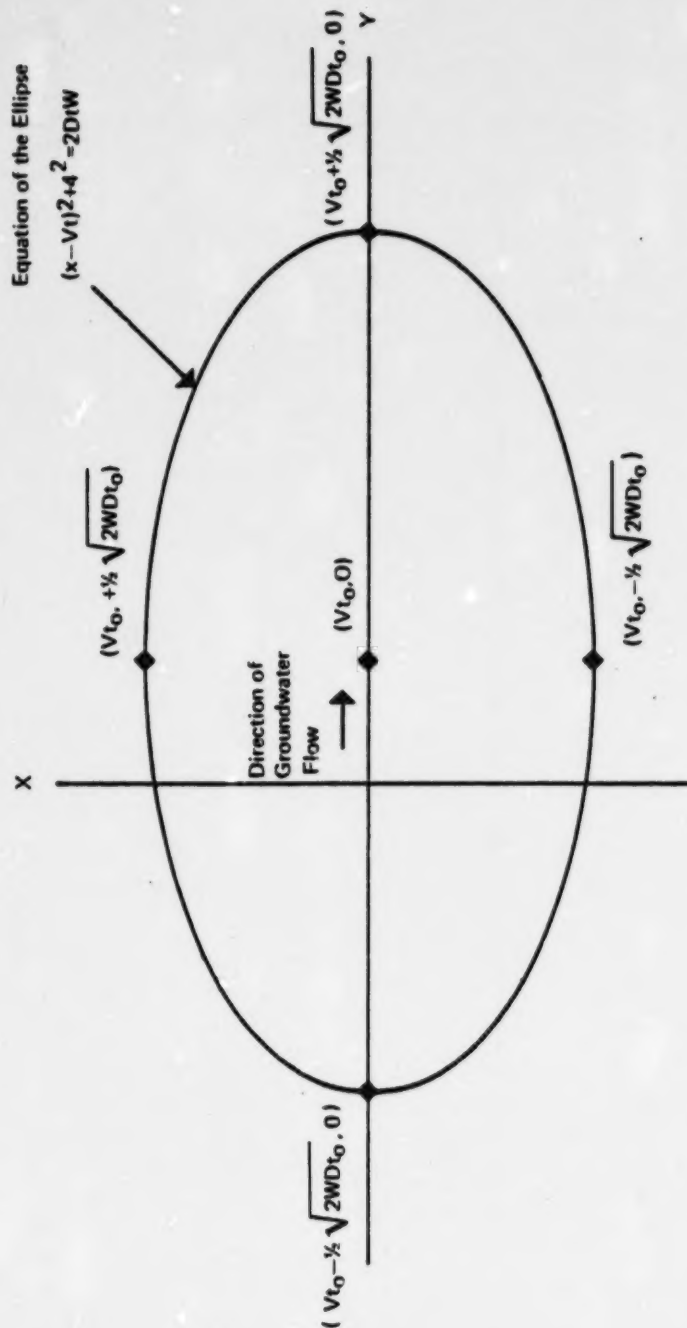


Figure B-1. Location of Recommended Monitoring Stations for a Detection Monitoring System, Based on the Solution of an Equation for an Ellipse Showing Pollutant Trace at Concentration C_0 (Detection Limit) at Time t_0 (an Arbitrary Time After the Spill).

BEGIN
LAST LINE
OF TEXT

3/8"

-127-

4 OF
AREA;
SIDE
VERSION
OR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

The sampling frequency may be solved by finding the width
of t as a function of x and y:

$$\Delta t = \frac{4W^2D^2 - 4V^2y^2 - 8xVWD}{2V^2} \quad (B-10)$$

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

6-1/2"

9-1/8"

BEGIN
LAST LINE
OF TEXT

3/8"

-128-

BOTTOM OF
IMAGE AREA/
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD:
BEGIN
SECTIONS
HERE

APPENDIX C

DEVELOPMENT OF POLLUTANT EVENT MONITORING MODEL EQUATIONS

The conservation of mass equation is of the form:

$$\nabla \cdot (\rho V) = \frac{\partial \rho}{\partial t} \quad (C-1)$$

where ρ = the density of fluid, and V - velocity. This says that the amount of fluid entering a small volume is equal to the increase in density.

Darcy's law is expressed in the form:

$$V = -\lambda \left[\nabla P - \rho g \nabla D \right] \quad (C-2)$$

where V = velocity, λ = a parameter known as mobility, P is pressure, ρ is density, g is the gravitational acceleration constant, and D is depth. This equation says that fluid velocity in porous rock is proportional to applied force. λ , mobility, may be a function of pollutant concentration in the fluid.

The convection-diffusion equation is:

$$D \nabla^2 C - V \cdot \nabla C = \delta C / \delta t \quad (C-3)$$

where C = the concentration of pollutant within a fluid, D = a parameter known as the diffusion or dispersion coefficient, and V = velocity of the fluid in which the pollutant is dissolved. This equation is a relative of the heat or diffusion equation:

$$D \nabla^2 C = \delta C / \delta t \quad (C-4)$$

When $V = 0$, this is a solution to equation C-3. Thus, in the frame of reference of the moving fluid, the convection-diffusion equation simplifies to a simple diffusion equation.

The mobility λ_i of a given fluid is composed of several terms:

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

$$\lambda_i = \frac{\kappa \kappa_{ri}}{\mu_i} \quad (C-5)$$

where κ = permeability, κ_{ri} = relative permeability of fluid, and μ_i = viscosity of fluid i.

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

IMMISCIBLE FLOW EQUATIONS

$$v \cdot \left[a \rho_n \frac{\kappa \kappa_{rn}}{\mu_n} (S_w) (v P_n - \rho_n g v D) \right] + a q_n = a \frac{\partial (\phi_e \rho_n S_n)}{\partial t} \quad (C-6)$$

$$v \cdot \left[a \rho_w \frac{\kappa \kappa_{rw}}{\mu_n} (S_w) (v P_w - \rho_w g v D) \right] + a q_w = a \frac{\partial (\phi_e \rho_w S_n)}{\partial t} \quad (C-7)$$

$$P_C(S_w) = P_n - P_w \quad (This is an empirical law, verified experimentally.) \quad (C-8)$$

$$S_n + S_w = 1, \quad (C-9)$$

where a subscript n = nonwetting phase, and a w = wetting phase.

- S = saturation (varies in space)
- g = the gravitational constant
- q(x,y,t) = source or sink, volume injected per unit volume rock
- D = depth (may vary in space)
- a = h (thickness) in two dimensions (may vary in space)
= l in three dimensions
- ϕ_e = effective porosity (may vary in space)
- P = pressure (varies in space)
- ρ = density (constant)
- κ = permeability (varies in space)
- P_C = capillary pressure (varies in space)

MISCIBLE FLOW EQUATIONS

$$v \cdot \left[a \rho_w \frac{\kappa}{\mu_w} (v P_c - \rho_w g v D) \right] + a q_w = a \frac{\partial [\phi_e \rho_w S_w]}{\partial t} \quad (C-10)$$

$$P_C = P_C(S_w) \quad (C-11)$$

BEGIN
LAST LINE
OF TEXT

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUSTRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

$$v_w = (\nabla P_c - \rho_w g \nabla D) \frac{\kappa}{\mu} \quad (C-12)$$

$$\alpha \phi_e \frac{\partial}{\partial t} (S_w C) = \kappa_l \nabla \cdot (\alpha \nabla C) - v_w \cdot \nabla (\alpha C) + \alpha q_c \quad (C-13)$$

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

where

- C = concentration of pollutant in groundwater
- α = h (thickness) in two dimensions
= l in three dimensions
- P_c = capillary pressure (varies in space)
- S_w = water saturation (varies in space)
- κ = permeability (constant)
- μ_w = viscosity of groundwater (constant)
- ϕ_e = effective porosity
- C = concentration of pollutant in groundwater
- κ_l = diffusion of dispersion constant
- g = gravitational constant
- ρ_w = density of groundwater
- q = q(x,y,z,t) = source or sink volume of water per volume rock
- q_w = water source term
- q_c = pollutant source term

FLUID ALTERING EQUATIONS: MODIFICATIONS FOR POLYMER AND SURFACTANT POLLUTANT EVENTS

Where the pollutant is polymer or surfactant, equations 14 and 15 must be added.

$$\kappa = \kappa(C) \quad (C-14)$$

$$\mu_w = \mu_w(C) \quad (C-15)$$

DETERMINING THE SOURCE TERM

The source term q in both the miscible and immiscible flow equations will vary according to the source of contamination. For contamination from a leaky well, q might be modeled as a point source:

$$q(x,y,z) = Q \delta(x-x_0) \delta(y-y_0) \delta(z-z_0) \quad (C-16)$$

where Q is the pollutant emitted and (x_0, y_0, z_0) is the location of the leak. It is important to understand that this case is not likely to be useful because, if one knew where the leak in the well was, he would stop it and there would be no source term. For contamination via a direct communication between strata, q might take the form

BEGIN
LAST LINE
OF TEXT

3/8"

-131-

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

$$q(x,y,z,t) = q^*C^*8x_0,y_0,z_0,t)$$

(C-17)

where q^* = the fraction of reservoir fluid leaking into the aquifer from the leak at point (x_0,y_0,z_0) , and C^* is the concentration of pollutants within the reservoir fluids. This is related to the progress of EOR within the reservoir.

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

6-1/2"

9-1/8"

BEGIN
LAST LINE
OF TEXT

3/8"

BOTTOM OF
IMAGE AREA,
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

-132-

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

APPENDIX D

USGS/NWDE GROUNDWATER MONITORING STATION LOCATIONS AND SAMPLING FREQUENCIES

This appendix provides examples of the nature and extent of data available for a groundwater quality baseline from the USGS data bases. Locations with high EOR potential, selected as examples, are shown in Table D-1.

TABLE D-1. SUMMARY OF EXISTING GROUNDWATER DATA FOR FOUR
SAMPLE COUNTIES

Location	9-1/8"	No. of Monitoring Wells	No. of Parameters Measured	Frequency
Stephens County, Texas		40	9	Seasonal
Wayne County, Mississippi		25	11	Annual
Osage County, Oklahoma		24	11	Annual
Kern County, California		663	14	Annual

Monitoring information for Stephens County is presented in Figure D-1 and Table D-2. Maps and sampling frequency computer printouts can be obtained from the USGS for a nominal users charge.

BEGIN
LAST LINE
OF TEXT

3/8"

-133-

PAGE NUMBER

BOTTOM OF
IMAGE AREA;
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTION'S
HERE

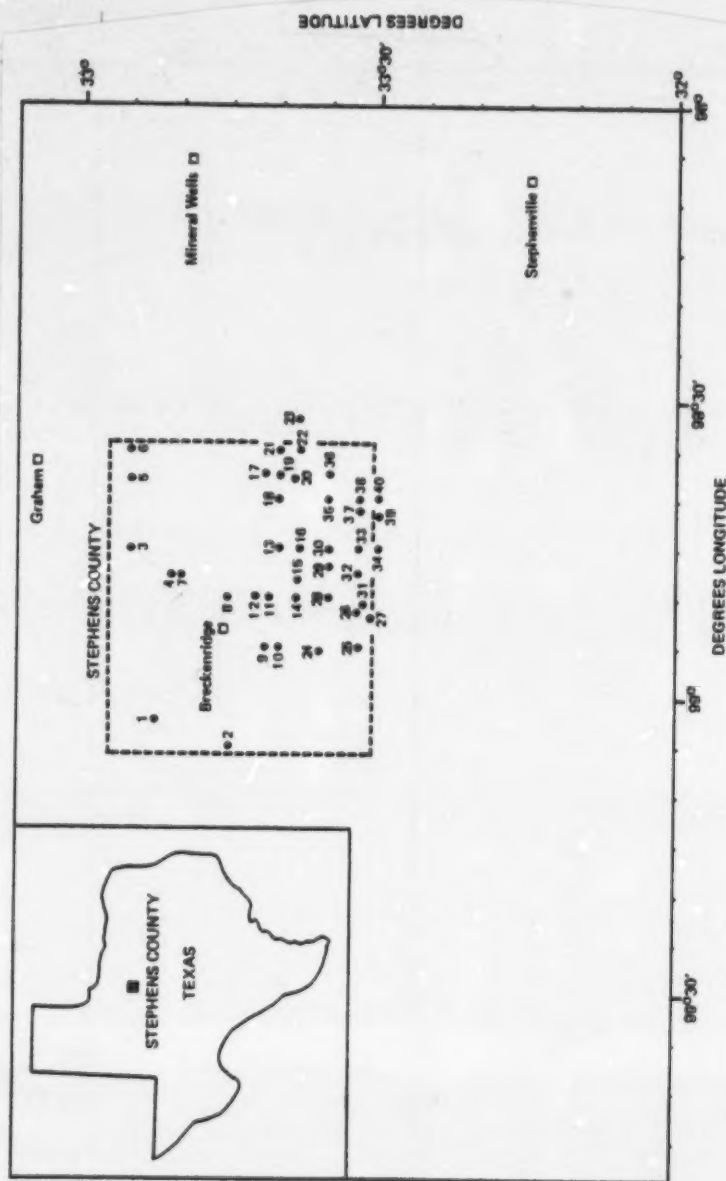


Figure D-1. Area map for Stephens County, Texas, showing locations of USGS groundwater quality monitoring wells.

BEGIN
LAST LINE
OF TEXT

BEGIN
FIRST
LINE OF
TEXT
HERE

CENTER OF
PAGE

TOP OF
IMAGE
AREA

DROPPED
HEAD;
BEGIN
SECTIONS
HERE

**TABLE D-2. PARAMETERS MEASURED - 40 STEPHENS COUNTY
GROUNDWATER MONITORING STATIONS (See Figure
D-1 for Station Locations) ALL PARAMETERS
MEASURED SEASONALLY**

Temperature
Specific Conductance
pH
Dissolved Solids
Major Ions
Hardness
Silica
Nitrogen Species
Minor Constituents

6-1/2"

9-1/8"

BEGIN
LAST LINE
OF TEXT

3/8"

-135-

BOTTOM OF
IMAGE AREA
OUTSIDE
DIMENSION
FOR TABLES
AND ILLUS-
TRATIONS